V7/23





# Features /

- 12.1" Marine Panel PC
- 8th Gen. Intel Core i3/i5 Processors
- 1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz

12.1" 8th Gen. Intel Core i3/i5 Marine Panel PC

- True Flat Bezel Design
- IP66 Front Panel
- Aluminum Enclosure (with Anti-Corrosion Coating)
- DC 24V Power Input with Isolated
- IEC 60945 Marine Certification

## Specifications /



System	
CPU	Intel Core i3-8145UE (2C/4T,2.2GHz,15W TDP) Intel Core i5-8365UE (4C/8T,1.6GHz,15W TDP)
System Chipset	SoC
Memory	1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz
TPM	TPM 2.0

IPM	IPM 2.0
IO Port	
USB	4 x USB 3.0 type A
Serial/Parallel	1 x RS-232 (COM1, 5-pin terminal block) 1 x RS-232/422/485 Selectable Default RS-485 (COM 2, 5-pin terminal block) 1 x Display Port 1 x Line-out, Phone Jack 1 x ESD Ground
LAN	2 x GbE RJ-45
Power Connector	1 x 2-pin Terminal Block Connector (for remote power switch) 1 x 3-pin Terminal Block Connector
Front Side I/O	Keypad Capacitive Touch with LED  · Power  · Brightness+  · Brightness-

Storage Space	
	Default: 1 x M.2 M-Key 2242(option 2280 can't use TB-528 at
Storage	same time)
	1 x 2 5" HDD space (option)

· Brightness Mode Swap (DAY, DUSK, NIGHT)


Expansion	
On board expansion	1 x TB-528 Expansion Connector (for 19"/24" only)
bus	option TB-528C2I for Isolation 2 x RS-422/485 Isolation


Display	
Display Type	12.1" TFT-LCD
Max. Resolution	1024 x 768
Max. Color	16.7M
Luminance (cd/m²)	500
View Angle (H/V)	178(H)/178(V)
Contrast	1000:1
Backlight Lifetime	30,000 hrs


Type Projected Capacitive Touch


USB Interface Light Transmission(%) 90%

# Dimensions / /

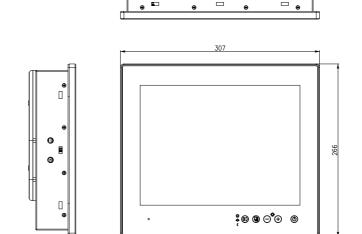












Power		
Power Input	DC 24V with Isolated / AC Power option	
Power Consumption	ViKING-912BPH: 50.88W (Max)	

Mechanical	
Construction	Black/ Aluminum Bezel and Aluminum Housing (Anti-Corrosion Coating)
Mounting	Panel Mount/ VESA Mount Front Access Mount / Mounting Bracket (option)
Dimensions	307 x 266 x 72.5 mm
Net Weight	3.6 kg

Environmental	
Operating Temperature	0~50°C (WT1: -20~60°C for optional)
Storage Temperature	-30~70°C
Humidity	10 to 90% @ 40°C, non-condensing
IP Rating	Front Panel IP66
Certificate	CE/FCC/IEC 60945

### Operating System Support

Windows 10, Windows 11



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl