

SPECIFICATION AND PERFORMANCE

Series	126B_SERIES	File	126B-SPEC_1	Date	2022/10/25
--------	-------------	------	-------------	------	------------

Scope:

This specification covers the requirements for product performance, test methods and quality assurance provisions of 126B-SERIES

Performance and Descriptions:

The product is designed to meet the electrical, mechanical and environmental performance requirements specification. Unless otherwise specified, all tests are performed at ambient environmental conditions.

RoHS:

All material in according with the RoHS environment related substances list controlled.

MATERIALS

NO.	PART NAME	DESCRIPTION
1	Housing	LCP, UL94-0, Black
2	Contact	Copper alloy, 1u~3u" gold plating on contact and solder area , under plating nickel
3	Latch	Stainless steel

RATING

Rated Voltage	25VAC RMS
Rated Current	0.5A per pin
Operating Temperature	-55°C~85°C 85%RH MAX
Durability	50 Cycle

ELECTRICAL

Item	Requirement	Test Condition
Contact Resistance(Low Level)	40mΩ Max. (Initial) ΔR 20mΩ Max. (Final)	Subject mated contacts assembled in housing to closed circuit current of 100mA (Max.) at open circuit voltage of 20mV voltage (Max.). EIA-364-23
Insulation Resistance	250 MΩ Min. (Initial) 100 MΩ Min. (Final)	Measured by applying 500VDC for 2 minutes between adjacent contacts of unmated connector. EIA-364-21
Withstanding Voltage	No Breakdown.	Apply 500 VAC for 1 minute between adjacent contacts of unmated connector. EIA-364-20

The information contained herein is exclusive property of Attend. Do not copy and print except that Attend accepts. 本文件係屬立威科技股份有限公司所有；非經同意，不得以任何覆寫、拷貝、翻印等方式私自據有。亦不得擅加毀損、塗改。



Contact Current Rating	Temperature Rise shall not exceed 30°C above ambient.		Contacts of the connector are connected in a series circuit, Supple the rated current (0.5 Amperes) EIA-364 Test Procedure 70 Detail in Annex C
Reference impedance	Long Pin	46~54Ω	Mated connector and module including solder pad and gold finger. EIA-364-108
	Short Pin	46~54Ω	
Insertion Loss	-0.4dB (f<=2.0 GHz) -0.5dB (2 GHz <f<=6 GHz) -0.8dB (6 GHz <f<=8 GHz) -1.2dB (8 GHz <f<=10 GHz)		Signals with 1:1 S/G EIA-364-101
Return Loss	-20dB (f<=2.0 GHz) -18dB (2 GHz <f<=4 GHz) -15dB (4 GHz <f<=6 GHz) -9.0dB (6 GHz <f<=8 GHz) -5.0dB (8 GHz <f<=10 GHz)		Signals with 1:1 S/G EIA-364-108
Near End Cross-Talk	-35.0dB (f<=1.0 GHz) -31.0dB (1 GHz <f<=2 GHz) -29.0dB (2 GHz <f<=3 GHz) -28.0dB (3 GHz <f<=4 GHz) -27.0dB (4 GHz <f<=10 GHz)		1:1 S/G Same Side Both the victim and the aggressor locate at the same side. EIA-364-90
	-16.0dB (f<=1.0 GHz) -11.0dB (1 GHz <f<=2 GHz) -9.0dB (2 GHz <f<=3 GHz) -8.0dB (3 GHz <f<=5 GHz)		2:1 S/G Same Side Both the victim and the aggressor locate at the same side. EIA-364-90
	-47.0dB (f<=1.0 GHz) -45.0dB (1 GHz <f<=2 GHz) -42.0dB (2 GHz <f<=3 GHz) -40.0dB (3 GHz <f<=4 GHz) -38.0dB (4 GHz <f<=6 GHz) -35.0dB (6 GHz <f<=8 GHz) -31.0dB (8 GHz <f<=10 GHz)		1:1 S/G Opposite Side The victim and the aggressor locate at the opposite side. EIA-364-90
Far End Cross-Talk	-40.0dB (f<=1.0 GHz) -37.0dB (1 GHz <f<=2 GHz) -35.0dB (2 GHz <f<=3 GHz) -32.0dB (3 GHz <f<=4 GHz) -30.0dB (4 GHz <f<=5 GHz) -28.0dB (5 GHz <f<=6 GHz) -27.0dB (6 GHz <f<=7 GHz) -26.0dB (7 GHz <f<=9 GHz) -25.0dB (9 GHz <f<=10 GHz)		1:1 S/G Same Side Both the victim and the aggressor locate at the same side. EIA-364-90
	-30.0dB (f<=1.0 GHz) -23.0dB (1 GHz <f<=2 GHz) -20.0dB (2 GHz <f<=3 GHz) -16.0dB (3 GHz <f<=5 GHz)		2:1 S/G Same Side Both the victim and the aggressor locate at the same side. EIA-364-90

	-50.0dB ($f \leq 2.0$ GHz) -45.0dB ($2 \text{ GHz} < f \leq 4 \text{ GHz}$) -42.0dB ($4 \text{ GHz} < f \leq 6 \text{ GHz}$) -38.0dB ($6 \text{ GHz} < f \leq 8 \text{ GHz}$) -35.0dB ($8 \text{ GHz} < f \leq 10 \text{ GHz}$)	1:1 S/G Opposite Side The victim and the aggressor locate at the opposite side. EIA-364-90
--	--	--

MECHANICAL

Item	Requirement	Test Condition
Module Insertion / Withdrawal Force	Insertion force: 59.8 N (6.1kgf) Max. Withdrawal force: 44.6 N (4.55kgf) Max.	Measure the force required to mate connectors (Speed: 25.4mm/minute) EIA-364-13
Durability	Contact Resistance ΔR 20m Ω Max. (Final)	Connectors shall be subjected to 50 cycles of Insertion and Withdrawal. Automatic Insertion / Withdrawal Speed: 500 cycles/hour Manual Insertion / Withdrawal Speed: 250 cycles/hour EIA-364-09
Reseating	No evidence of physical Damage	Manually unplug/plug the connector or socket. Perform 3 such cycles.
Vibration	Contact Resistance ΔR 20m Ω Max. (Final) Discontinuity: 1 μ Sec Max	Subject mated connectors 15 minutes in each of 3 mutually perpendicular directions. Both mating halves should be rigidly fixed so as not to contribute to the relative motion of one contact against another. The method of fixturing should be detailed in the test report. EIA-364-28 test condition VII, test condition letter D
Physical Shock	Contact Resistance ΔR 20m Ω Max. (Final) Discontinuity: 1 μ Sec Max	The connectors shall be soldered on the P.C. board. Acceleration: 50 G. Time: 11ms. (half sine wave). Cycle: 3 drops each to normal and reversed directions of X, Y and Z axes, totally 18 drops. EIA-364-27 condition A

ENVIRONMENTAL

Item	Requirement	Test Condition
Thermal shock	Contact Resistance ΔR 20 m Ω Max.(Final)	Mated connectors Temperature: -55+0/-3 \rightarrow 85+3/-0($^{\circ}$ C) Temp. Time: 30 \rightarrow 30(minute) Cycle: 10 cycles. EIA-364-32, condition I
Temperature Life	Contact Resistance ΔR 20 m Ω Max.(Final)	Mated connectors Temperature: 105 $^{\circ}$ C \pm 2 $^{\circ}$ C


		Duration: 120 hours EIA-364-17, condition IV
Temperature Life (preconditioning)	Contact Resistance ΔR 20 m Ω Max. (Final)	Mated connectors Temperature: 105°C \pm 2°C Duration: 72 hours EIA-364-17, condition IV
Thermal Cycling	Contact Resistance ΔR 20 m Ω Max. (Final)	Mated connectors, Cycle the connector or socket between 15°C \pm 3°C and 85°C \pm 3°C, as measured on the part. Ramps should be a minimum of 2°C per minute, and dwell times, should insure that the contacts reach the temperature extremes (a minimum of 5 minutes). Humidity is not controlled. Perform 500 such cycles.
Humidity-Temperature Cycling	Contact Resistance ΔR 20 m Ω Max. (Final)	Mated connectors Temperature Range 25°C~65°C in temperature and 90~95% RH, Duration 10 cycles. (240hours.) EIA-364-31, Method III, Test condition B
Mixed flowing ags	Contact Resistance ΔR 20 m Ω Max. (Final)	Exposure unmated connector for 112 hours in MFG chamber, expose mated (to same test module mated during temp life preconditioning) connector for 56 hours in MFG chamber. EIA-364-65, class IIA
Thermal disturbance	Contact Resistance ΔR 20 m Ω Max. (Final)	Cycle the connector or socket between 15°C \pm 3°C and 85°C \pm 3°C, as measured on the part. Ramps should be a minimum of 2°C per minute, and dwell times should ensure that the contacts reach the temperature extremes (a minimum of 5 minutes). Humidity is not controlled. Perform 10 such cycles.
Salt spray	Contact Resistance ΔR 20 m Ω Max. (Final)	Salt concentration: 5 \pm 1% Temperature: 35°C \pm 2°C Testing time: 48 hours, after salt is removed by running water and a drop is removed, it is measured. EIA-364-26

SOLDER ABILITY

Item	Requirement	Test Condition
Solderability	95% min. of solder area 10x the magnifying glass of view	Soldering time: 4~5 Second Solder Temperature: 245°C \pm 5°C

		EIA-364-52
Resistance to Reflow Soldering Heat	No physical damage shall occur.	Test connector on PCB Pre-heat: 150°C~200°C, 60~120 Sec Heat: Up 217°C, 60~150 Sec Ramp up rate 3°C/Sec Max. Ramp down rate 6°C/Sec Max. Peak temp: 260°C Max. IPC/JEDEC J-STD-020D.1

Reflow Profile

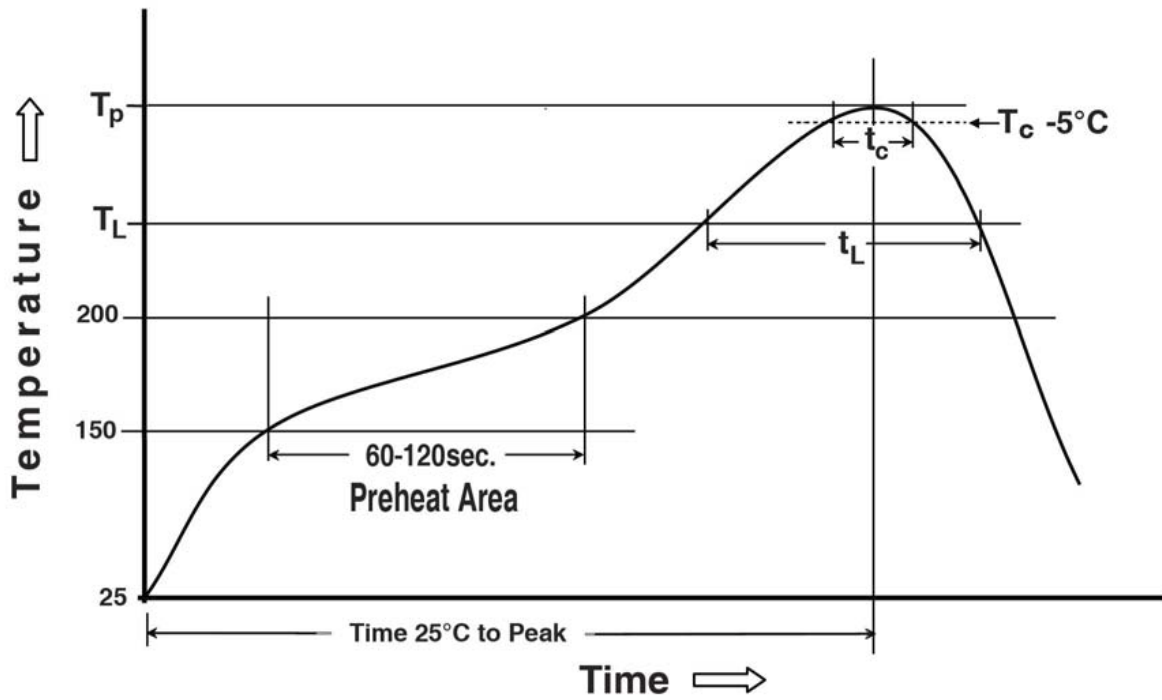

Preheating temperature: 150 ~ 200°C, 60~120 seconds
 Liquidus temperature (TL): 217°C, 60~150 seconds
 Peak temperature: 260°C
 Time within 5 °C of peak temperature (Tc): 255°C, 30seconds

Product Qualifications and Test Sequence

Test of Examination	Test Group										
	A	B	C	D	E	F	G	H	I	J	K
	Test Sequence										
Examination or product	1,9	1,3	1,7	1,8	1,8	1,10	1,10	1,10	1,12	1,5	1,4
Contact resistance	2,6			2,7	2,5,7	2,5,7,9	2,5,7,9	2,5,7,9	2,5,7,9,11	2,4	
Insulation resistance	3,7										
Withstanding Voltage	4,8										
Contact Current Rating		2									
Reference impedance			2								
Insertion Loss			3								
Return Loss			4								
Near End Cross-Talk			5								
Far End Cross-Talk			6								
Module insertion / Withdrawal Force				3,6							
Durability	5			4	3	3	3	3	3		
Reseating				5	6	8	8		10		
Vibration								6			
Physical Shock								8			
Solder ability											3
Thermal Shock							4				
Temperature Life					4						
Temperature Life (preconditioning)						4		4	4		
Thermal Cycling						6					
Humidity-Temperature Cycling							6				
Mixed flowing gas									6		
Thermal disturbance									8		
Salt spray										3	
Resistance to Reflow Soldering Heat											2