


CCSPG1060N

**N-CH GALLIUM NITRIDE
FIELD EFFECT TRANSISTOR
60 AMP, 100 VOLT**

Central
Semiconductor

www.centrasemi.com
DESCRIPTION:

The CENTRAL SEMICONDUCTOR CCSPG1060N is an N-channel gallium nitride field effect transistor designed for use in EV charging stations, microinverters, and highly efficient fast-charging power blocks.

MARKING: CSP 1060 D/C

Top View

Bottom View

CSP3.5X2 CASE**MAXIMUM RATINGS:** ($T_J=25^\circ\text{C}$)

Drain-Source Voltage

Gate-Source Voltage

Continuous Drain Current ($T_C=25^\circ\text{C}$)Power Dissipation ($T_A=25^\circ\text{C}$)

Operating and Storage Junction Temperature

SYMBOL V_{DS}

100

UNITS

V

 V_{GS}

-4.0 to +6.0

V

 I_D

60

A

 P_D

1.1

W

 T_J, T_{stg}

-40 to +150

 $^\circ\text{C}$ **ELECTRICAL CHARACTERISTICS:** ($T_J=25^\circ\text{C}$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{GSSF}	$V_{GS}=5.0\text{V}, V_{DS}=0$		20	5000	μA
I_{GSSR}	$V_{GS}=4.0\text{V}, V_{DS}=0$		60	400	μA
I_{DSS}	$V_{DS}=80\text{V}, V_{GS}=0$			350	μA
BV_{DSS}	$V_{GS}=0, I_D=400\mu\text{A}$	100			V
$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=9.0\text{mA}$	0.8	1.1	2.5	V
$r_{DS(ON)}$	$V_{GS}=5.0\text{V}, I_D=25\text{A}$		2.4	5.5	$\text{m}\Omega$
V_{FSD}	$V_{GS}=0, I_S=0.5\text{A}$		2.3		V
C_{iss}	$V_{DS}=50\text{V}, V_{GS}=0, f=1\text{MHz}$		1000		pF
C_{oss}	$V_{DS}=50\text{V}, V_{GS}=0, f=1\text{MHz}$		460		pF
C_{rss}	$V_{DS}=50\text{V}, V_{GS}=0, f=1\text{MHz}$		8.2		pF
$C_{oss(er)}$	$V_{DS}=0$ to 50V, $V_{GS}=0$		700		pF
$C_{oss(tr)}$	$V_{DS}=0$ to 50V, $V_{GS}=0$		1020		pF
Q_g	$V_{DS}=50\text{V}, V_{GS}=0$ to 5V, $I_D=25\text{A}$		9.2		nC
Q_{gd}	$V_{DS}=50\text{V}, V_{GS}=0$ to 5V, $I_D=25\text{A}$		1.9		nC
Q_{gs}	$V_{DS}=50\text{V}, V_{GS}=0$ to 5V, $I_D=25\text{A}$		1.7		nC

R2 (1-November 2023)

CCSPG1060N
N-CH GALLIUM NITRIDE
FIELD EFFECT TRANSISTOR
60 AMP, 100 VOLT



CSP3.5X2 CASE - MECHANICAL OUTLINE

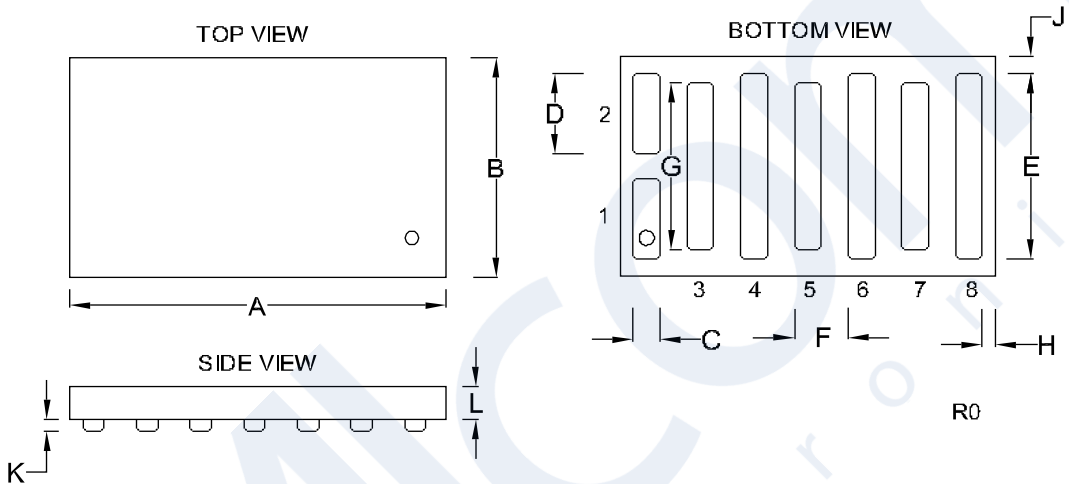

R0

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.137	0.139	3.47	3.53
B	0.083	0.085	2.10	2.16
C	0.009	0.011	0.23	0.27
D	0.030	0.031	0.75	0.80
E	0.070	0.072	1.78	1.82
F	0.020		0.50	
G	0.063	0.065	1.60	1.65
H	0.005		0.125	
J	0.006		0.165	
K	0.004	0.006	0.10	0.14
L	0.011	0.013	0.29	0.33

CSP3.5X2 (REV: R0)

LEAD CODE:

- 1) Gate
- 2) Source
- 3) Drain
- 4) Source
- 5) Drain
- 6) Source
- 7) Drain
- 8) Source

MARKING:
CSP 1060 D/C


CCSPG1060N

N-CH GALLIUM NITRIDE
FIELD EFFECT TRANSISTOR
60 AMP, 100 VOLT




TYPICAL ELECTRICAL CHARACTERISTICS


Typical Output Characteristics

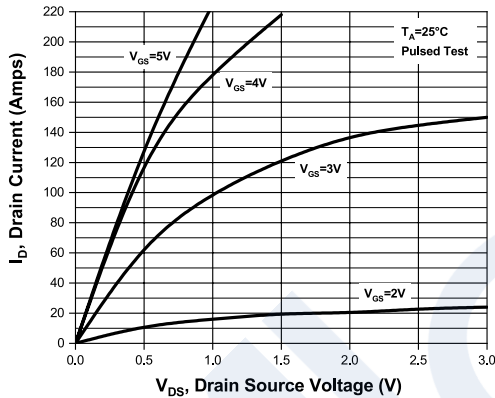


Typical Output Characteristics

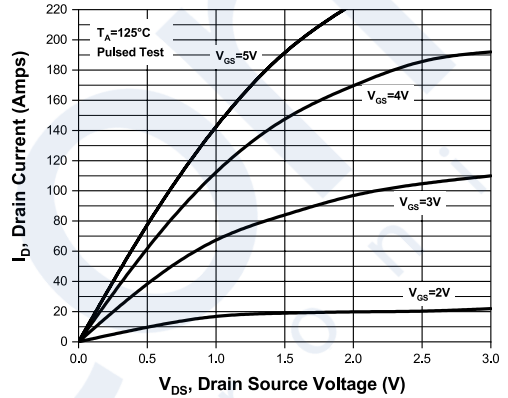

Drain Source On Resistance

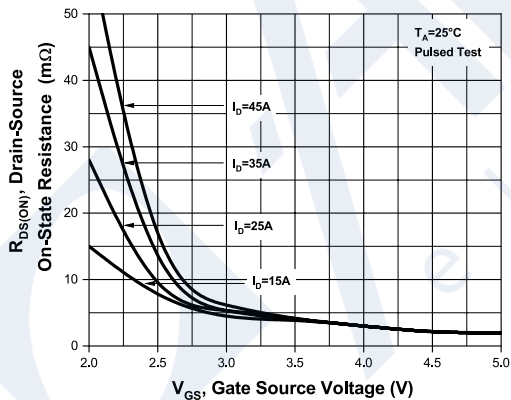

Drain Source On Resistance

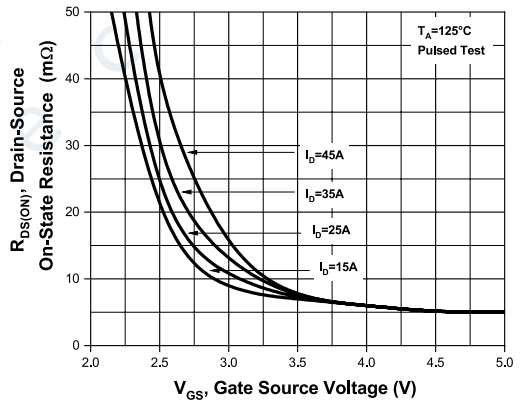


CCSPG1060N

N-CH GALLIUM NITRIDE
FIELD EFFECT TRANSISTOR
60 AMP, 100 VOLT




TYPICAL ELECTRICAL CHARACTERISTICS


Transfer Characteristics

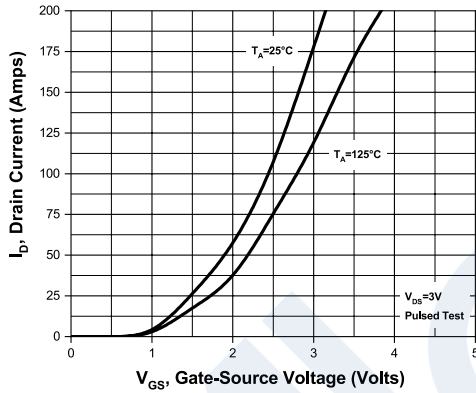


Drain Source Temperature Coefficient

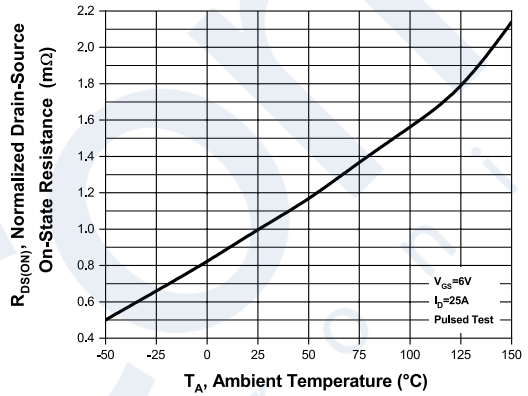

Power Derating

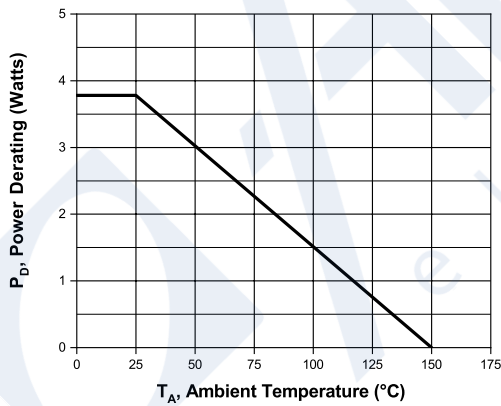

Gate Capacitance Charge

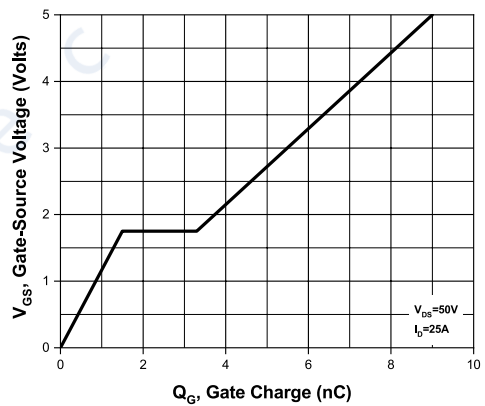


CCSPG1060N

N-CH GALLIUM NITRIDE
FIELD EFFECT TRANSISTOR
60 AMP, 100 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

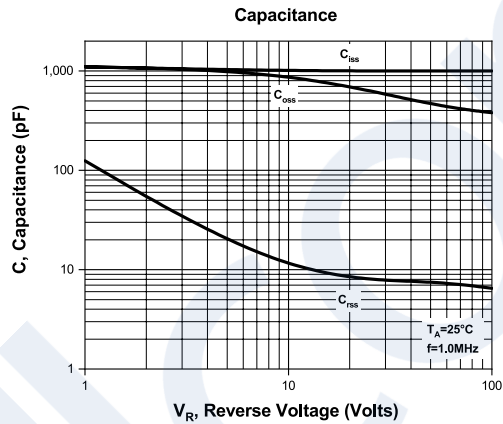

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms