




EPM-1601

mPCIe to 4 -RS-232 Module

- > Input Interface PCI-Express. 2.0
- > Output Interface 4x RS-232
- > Industrial temperature (W/T temp. -40 °C to 85°C) operation
- > Support Ring Wake function (optional)

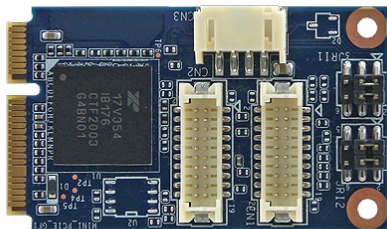

+ Spec

I/O	
Input Interface	PCI-Express. 2.0
Output Interface	4x RS-232
支持软件	
OS	Windows 7/10 and Linux
Power Requirement	
Power Consumption	3.3V±5%
Mechanical & Environmental	
Operating Temperature	-40~+85°C
Storage Temperature	-55~+95°C
Vibration Test	5G @5~500Hz
Shock Test	10G @ 11ms
Dimension	50.9mm*30mm
Form-Factor	mPCIe
Ordering Information	
Ordering Information	Standard Ordering PN: -EPM-1601-A1R Accessories List: -2 pair DB-9 connectors cable


www.avalue.com.tw



EPM-1602

mPCIe to 4-RS-422/485 Module

- > Input Interface PCI-Express. 2.0
- > Output Interface 4x RS-422/485
- > Industrial temperature (W/T temp. -40 °C to 85°C) operation
- > Support auto flow control

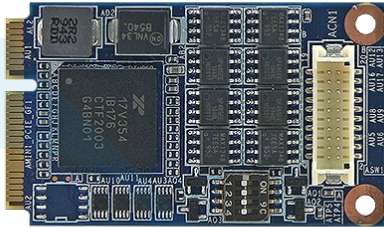

+ Spec

I/O	
Input Interface	PCI-Express. 2.0
Output Interface	4x RS-422/485
支持软件	
OS	Windows 7/10 and Linux
Power Requirement	
Power Consumption	3.3V±5%
Mechanical & Environmental	
Operating Temperature	-40~+85°C
Storage Temperature	-40~+85°C
Vibration Test	5G @5~500Hz
Shock Test	10G @ 11ms
Dimension	50.9mm*30mm
Form-Factor	mPCIe
Ordering Information	
Ordering Information	Standard Ordering PN: -EPM-1602-A1R Accessories List: -1 pair DB-9 connectors cable

www.avalue.com.tw