


EmCORE-a5364

AMD® Geode™ LX800 3.5" Compact Board

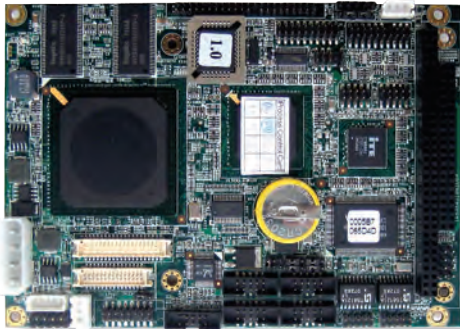

Features

- **Fanless Design**
- Soldered Onboard AMD® Geode™ LX800 500MHz Processor
- Soldered Onboard DDR 256MB Memory
- 18/24-bit TTL, 18-bit LVDS, and Analog RGB
- Support Analog RGB Output, LVDS and TTL Interface for LCD
- Multi-expansion (4 x USB, 4 x Serial Ports, 1 x PATA, 1 x CF Socket, PC/104)

System

CPU AMD® Geode LX800 500MHz processor

Memory Soldered onboard 256MB DDR SDRAM

Chipset AMD® LX800 + CS5536

BIOS Phoenix-Award PnP Flash BIOS

1 x Ultra ATA, support 2 IDE devices

Storage

1 x CompactFlash Type II Socket

1 x Floppy disk drive share with parallel port

Watchdog Timer 1~255 levels reset

I/O

Serial Port 4 x COM ports (3 x RS-232, 1 x RS-232/422/485 selectable)

Parallel Port SPP/EPP/ECP mode selectable

USB Port 4 x USB 2.0 ports

KB/MS 2 x 5-pin headers for PS/2 interface Keyboard and Mouse

Digital I/O 8-bit Digital Input/Output

Expansion Bus PC/104 interface

Ethernet

Chipset 2 x Realtek RTL8100CL PCI 10/100Base-T Ethernet controllers

Audio

CODEC/Interface Realtek ALC203 AC97 Audio Codec, Mic-in/Line-in/Line-out

Display

Graphics Chipset AMD® Geode LX800 integrated VGA controller with 2D engine (shared memory Max. 64MB)

Analog RGB: 1920 x 1440 @85Hz

Graphics Interface LCD: 18/24-bit TTL up to 1600 x 1200 (60Hz)
18-bit LVDS up to 1600 x 1200 (60Hz)

Mechanical & Environmental

Power Connector Big 4P AT power connector


Power Consumption 1.1A/5V

Operating Temp. 0 ~ 60°C (32 ~ 140°F)

Operating Humidity 0 ~ 95% (non-condensing)

Dimension (L x W) 146 x 102 mm (5.7" x 4")

Dimensions

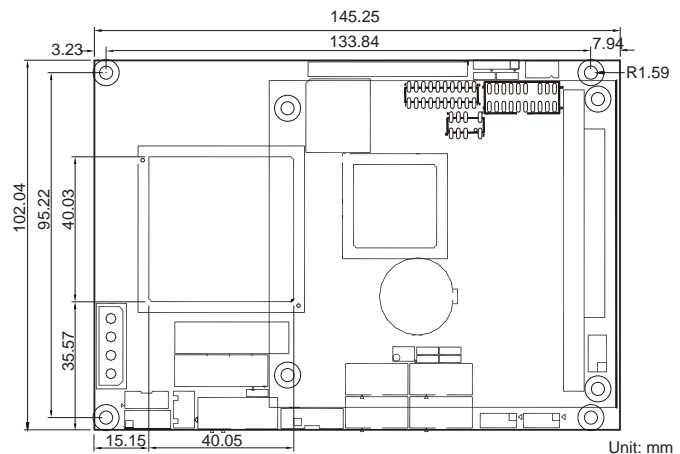

Ordering Information

EmCORE-a5364VL2 AMD® Geode™ LX800 3.5" compact board

CBK-14-5364-00

Cable kit

1 x Audio cable

2 x USB cables

4 x COM port cables

1 x LPT to FDD cable

1 x IDE cable

1 x LPT cable

2 x LAN cables

1 x VGA cable

1 x KB & MS cable