


i.CORE MX93

Engicam introduces i.Core MX93 based on the newest NXP®'s i.MX 93 processor, equipped with Arm Cortex®-A55 @ up to 1.7 GHz processor with dedicated NPU.


i.Core MX93 is an energy-efficient SOM suitable for machine learning, IoT, industrial and automotive device. The new module is based on EDIMM 2.0 versatile pinout and includes industrial features and industrial temperature grade as well as a wide set of peripherals and connectivity options such as 2x USB 2.0, and several display outputs.



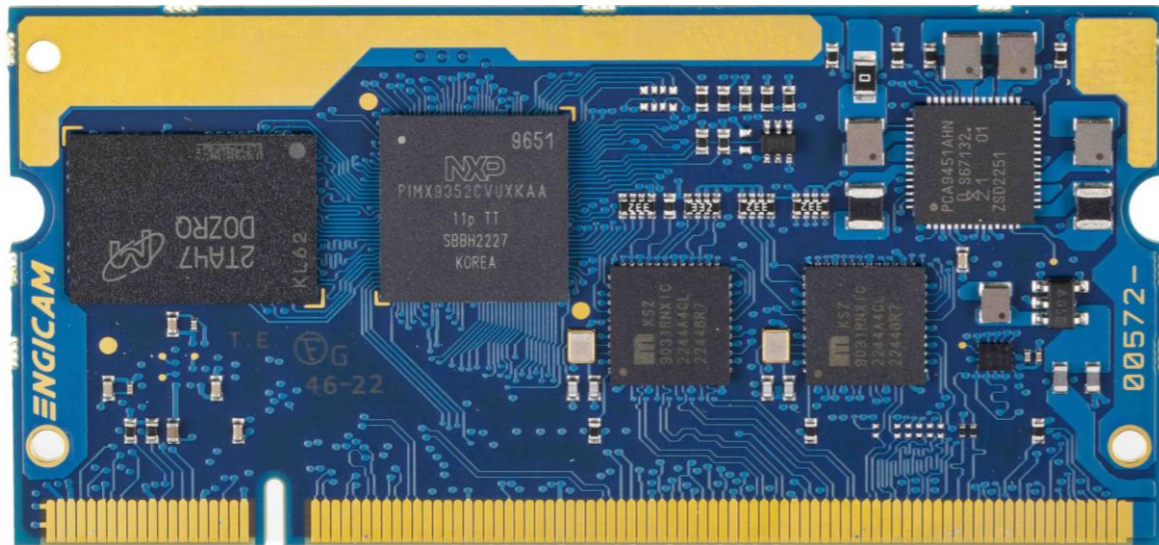



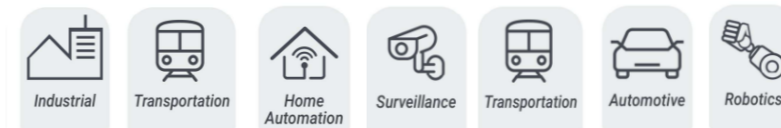

HIGHLIGHTS








- Standard Edimm 2.0
- Powerful dual Arm® Cortex - A55 processor with Neural Processing Unit (NPU)
- Suitable for high performance ML applications

APPLICATIONS



FEATURES

 CPU	NXP® i.MX 93
 CORES	2x Arm Cortex-A55 @ up to 1.7 GHz processor with NPU and 1x Arm Cortex-M33 @ 250Mhz.
 MEMORY	Up to 2GB LPDDR4 @3700MTs
 GRAPHICS	2D GPU: blending/composition, resize, color space graphics conversion
 VIDEO INTERFACES	<ul style="list-style-type: none"> • Single channel LVDS up to 1366x768 or 1280x800 • MIPI-DSI – 4 lanes up to 1920x1200 • MIPI-CSI
 NETWORKING	2x Gb Ethernet interfaces (1x RGMII option available)

 USB	<ul style="list-style-type: none"> • USB OTG 2.0 • USB HOST 2.0
 MASS STORAGE	Starting from 4GB eMMC drive soldered on-board
 PERIPHERAL INTERFACES	UART, I ² C, SPI, JTAG, CAN,SDIO, GPIOs
 POWER SUPPLY	+5V DC
 OPERATING SYSTEM	Linux, Android
 OPERATING TEMPERATURE*	Industrial qualified
 DIMENSIONS	32 x 67,6 mm

* Valid for all components except CPU. Customer shall consider junction temperature for CPU. Temperature will widely depend on application. Specific cooling solutions could be necessary for the final system.

BLOCK DIAGRAM

