

Connect Beyond Boundaries

5G ODU 2000 SERIES

5G High speed . Cloud-Managed . Outdoor IP67

5G cellular greatly enhances the flexibility and convenience of the network at any time and anywhere, which means enterprises can easily build a 5G network in just a few minutes to improve the competitiveness of digital business development. The cloud-managed 5G ODU 2000 series, combined with InCloud Manager SaaS service, provides global customers with high-speed, convenient, and secure 5G efficient networks.

5G ODU is a key part of the cellular gateway series launched by InHand for WAN, which can instantly deploy ultra-high speed 5G network by having gigabit cellular uplink without waiting on broadband; supporting dual SIM card switch network; adapting to the harsh environment. 5G ODU can provide a better and more stable network.

Combined with InCloud Manager, 5G ODU forms a cloud-managed network solution, providing global customers with high-speed and secure network access, and simple and convenient network management services to empower your core business.

Ideal for a wide range of application scenarios:


Chain Branch Networking

Convenience Store
Fast food restaurants
Clothing chain stores
Retail chain
Cosmetic chain stores
Pharmacy
New style tea drink chain store
Chain Hotel

Enterprise Branches Networking

Small enterprise office network
Small and medium-sized branches
SOHO Office
Education and training institutions
Financial branch outlets
Government

Application

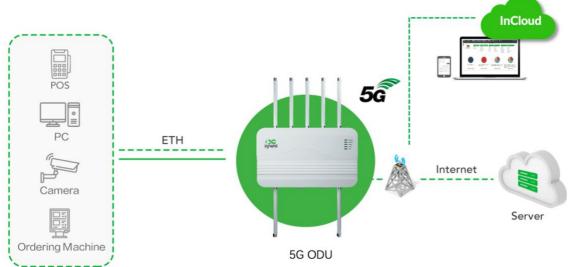



Features and Advantages

- + 5G high-speed cellular network
- + Plug-and-play deployment
- + Dual SIM card network
- + Zero-Touch deployment
- + IP67 protection
- Refined and visualized network management

Unlock the Power of 5G

Leveraging high-performance and fast 5G cellular network access, InHand 5G ODU delivers excellent connectivity with low latency, fully unlocking the potential of 5G

- •5G high-speed, DL:4.76Gbps, UL:1.25Gbps
- •5G Sub-6 GHz, Support SA & NSA networking
- •Compatible with LTE CAT19

• Improved Efficiency, Empower User Experiences

With outstanding performance, InHand 5G ODU helps enterprises build more robust and agile networks, facilitating business growth with improved experience

- •Throughput up to 2Gbps
- •2*2.5Gbps Ethernet port
- •WAN/LAN or dual LAN
- •PoE-enabled LAN port

• Efficient Cloud Management

The InHand 5G ODU, paired with the InCloud Manager, enables seamless cloud management of distributed sites at scale. Gain real-time network monitoring and enhance IT management efficiency from anywhere, breaking free from limitations.

- Unified management access platform
- ·Simple and intuitive graphical data
- •Easy-to-use management interface
- Overview of business

• Zero-Touch Remote Deployment

Zero-touch deployment streamlines the process effortlessly. Non-IT individuals can easily power and install on-site network equipment, while IT professionals remotely configure and troubleshoot devices from the cloud, reducing deployment costs.


- •Plug & play
- App configuration
- •Web configuration
- •Configuration via InCloud Manager


Purposely Designed for Outdoors


Committed to rigorous design principles, the InHand 5G ODU exemplifies meticulous attention to detail. From product design to component selection, every aspect is carefully crafted, ensuring exceptional performance even in harsh outdoor environments.

- IP67 protection rating
- Die-cast aluminum metal housing, fanless design
- Operating temperature: -30~70°C
- · Flexible wall/pole mounting with adjustable angles
- · External 6 high-performance 5G antennas made of fiberglass
- High-precision GPS location tracking

Dimensions (mm)

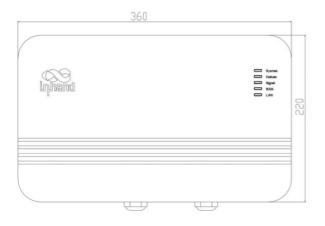





Specifications

Hardware Platform		
Throughput	Up to 2Gbps	
Recommended Users	200	
nterface Description		
Cellular	5G: 4.67Gbps (DL)/1.25Gbps (UL) 4G: 1.6Gbps (DL)/200Mbps (UL)	
Ethernet Port	2*2.5 GbE RJ45 WAN/LAN switchable, Dual-LAN PoE in LAN Port	
JSB	1* Type-C 2.0	
GPS	GPS/GLONASS/Beidou/Galileo/QZSS	
SIM	1*eSIM 2*SIM, Nano 4FF SIM slot, Hot plug	
RESET	Reset button	
Ground Terminal	1*GND	
ights	System, Cellular, Signal, WAN, LAN	
Antenna Interface	TNC-type connectors 6*Sub 6, 1*GNSS, 1*Wi-Fi	
Vi-Fi		
Radio Frequency	Single band 2.4GHz	
Max Transmission Bandwidth	150Mbps	
ransfer Protocol	802.11 b/g/n	
Maximum Output Power	17dBm	
perating Model	AP mode	
ower Supply	.i	
ower	Power over Ethernet (PoE) - 802.3at	
ower Consumption	≤15W	
1echanical Features	i	
nstallation	Wall mounting, pole mounting	
vimensions & Weight	360*220*72(mm), 2.87kg	
lousing & Cooling	Metal & Fanless	
nvironment	.i	
Vorking Temperature	-30°C to 70°C (-22°F to 158°F)	
torage Temperature	-40°C to 85°C (-40°F to 185°F)	
lumidity	5% to 95% (non-condensing)	
Protection Level	IP67	
Salt Mist	IEC60068-2-52	
MC		
lectrostatic Discharge Immunity	EN61000-4-2, level 3	
FI Radio Frequency Immunity	EN61000-4-3, level 3	
lectrical Fast Transient/Burst Immunity	EN61000-4-4, level 3	
urge	EN61000-4-5, level 3	
	EN61000-4-5, level 3	
nmunity to Conducted Disturbances		
E/CE	Class A, Margin 3dB	
hysical Properties	IFC60069 2 27	
hockproof	IEC60068-2-27	
/ibration Resistance	IEC60068-2-6	
ree Fall	IEC60068-2-32	
Certificates		
ertificates	FCC, IC, PTCRB, VZW, ATT*, TMO*,	
Varranty	3 years	

Completely Based on Cloud Management		
InCloud Manager	Centralized management platform Simple and intuitive dashboard User-friendly management Batch upgrade and management	
Uplink Management		
Network Access	Multiple network access, 5G/4G cellular network access, ETH network access	
Dial-up Service	Support PPPoE, cellular automatic redial, dual SIM switching, APN configuration	
Smart Link	Link backup/packet-by-packet load balancing among multiple links Real-time detection of link delay, jitter, and packet loss Supports priority adjustment	
Monitoring & Alerting		
Dash Board	Device information, interface status, and refined traffic	
Link Monitoring	Link delay, jitter, packet loss, and throughput monitoring	
Cellular Signal	Real-time view of cellular signal strength、RSSI、RSRP、RSRQ、SINR	
Log & Alarm	System logs, diagnostic logs, device events, email alerts	
Network Function		
IP Protocol	IPv4/IPv6*	
IP Application	VLAN, DHCP server/client, DNS, DDNS*, fixed address assignment, IP passthrough	
Interface Management	Duplex mode, link negotiation rate, interface enable	
Wi-Fi	Support 2.4G Wi-Fi,AP	
Policy Management	Policy routing, traffic shaping	
Self-recovering	Built-in software and hardware watchdog, self-healing equipment operation failure, to ensure the equipment maintains high availability	
Remote Maintenance		
Remote Access Control	Support Web/Cli remote access	
Cloud Connection	Remote maintenance of PCs, monitoring equipment, servers, etc.	
Network Diagnostics	Support Ping, Traceroute, network packet capture tools, diagnostic logs	
Configuration Backup	Support configuration import and export	

Ordering Guide

Model- <wmnn>: Type & Module</wmnn>	Cellular Type
ODU2002-NAVA	(For North America, Verizon, ATT) 5G Sub 6: n2/5/7/12/14/25/30/41/48/66/71/77/78 LTE FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/71 LTE TDD: B41/46/48
ODU2002-NATM	(For North America, T-Mobile) 5G Sub 6: n25/41/66/71 LTE FDD: B2/4/5/12/66/71 LTE TDD: 41 LAA: B46
ODU2002-EUNR	(For Europe/Australia/Asia) 5G Sub 6: n1/3/5/7/8/20/28/38/40/41/71/77/78/79 LTE FDD: B1/3/5/7/8/20/28/32/71 LTE TDD: B38/40/41/42/43



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 info@alcom.be | www.alcom.be Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

About Us

InHand Networks is a global leader of Industrial IoT, with a record of tremendous success following groundbreaking innovation since our inception in 2001.

InHand serves world-class partners and customers with industrial M2M routers, gateways, industrial Ethernet switches, rugged computers and IoT management platforms. We provide IoT solutions for various vertical markets including Smart Grid, Industrial Automation, Remote Machine Monitoring, Smart Vending, Smart City, Retail and more.

Proudly bearing the marks of both Rockwell Automation Technology Partner in Asia-Pacific and Schneider Electric Technology Partner, InHand Networks defines industrial innovation and reliability.



43671 Trade Center Place, Suite 100, Dulles, VA 20166, USA T: +1(703)348-2988 E: info@inhandnetworks.com W: www.inhandnetworks.com