

DALI PRO 2 IOT

DALI PRO 2 IOT | Controllers for light management systems



Product family features

- DALI-2 certified
- IoT ready with built-in gateway for remote data access
- Easy browser-based commissioning UI and Professional Software available
- Small form factor: only 6 TE (DIN rail)
- Commissioning via Ethernet/WLAN

Product family benefits

- DALI-2 certified for improved multi-vendor interoperability
- Template based onsite commissioning via Smart device
- Building Management System integration via optional KNX interface
- Remote access for changes in the configuration from every location
- LAN Interconnect to connect up-to 8 Controllers into one network
- Rest API for connection of a 3rd party Cloud with the DALI Pro2 IoT Controller
- Automated testing and reporting of emergency lighting installations
- Daylight Simulation via scene recall and/or light sensor regulation



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
 info@alcom.be | www.alcom.be
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
 Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

Specifications are subject to changes without notice.

www.inventronicsglobal.com

© 2024, Inventronics GmbH. All rights reserved. Inventronics is a license of the OSRAM brand. OSRAM is a trademark of ams OSRAM

support@inventronicsglobal.com

Areas of application


- Room control, floor control, daylight-dependent control
- Connection of light and presence sensors in DALI systems
- RGB and Tunable white applications
- Conference rooms
- Offices
- Suitable for indoor applications
- Industry
- Strip lighting
- Classrooms
- Sports halls

Technical data

Electrical data

Nominal voltage	220...240 V
Mains frequency	50/60 Hz
System wattage	20.00 W

Dimensions & weight

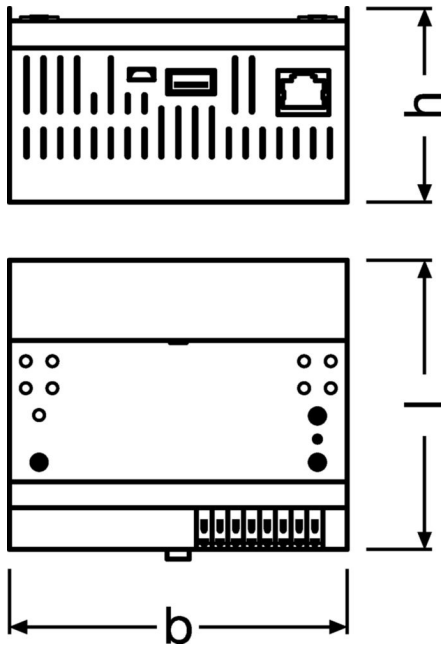

Product weight	247.00 g
Length	91.0 mm
Width	106.0 mm
Height	62.0 mm

Colors & materials

Product color	Light grey
---------------	------------

Temperatures & operating conditions

Ambient temperature range	0...+40 °C
---------------------------	------------

Capabilities

Number of control outputs	2
Dimming interface	DALI-2
Type of installation	Din Rail
Scenes	512 ¹⁾
Max. connectable push button couplers	16 ²⁾
App Control	Yes (Android/ iOS)
Commissioning tool	PC Tool (Windows) / WebUI
Max. number of connected controllers	8

1) Each DALI ECG can store up to 16 light scenes.

2) Max number pro DALI line. The actual number depends on the total number of DALI devices (couplers, sensors and ECGs) connected on the same DALI line

Certificates & standards

Approval marks – approval	CE
Protection class	II
Type of protection	IP20

Logistical data

Commodity code	85371091990
----------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary Article Identifier	4062172114189
Date of Declaration	02-04-2024
Declaration No. in SCIP database	In work

Download Data

File		
CAD data 3-dim	Compressed	▶ DALI PRO 2 IoT CAD3PDF 280120
Brochures	PDF	▶ Light is IoT ready - DALI PRO 2 IoT (EN)
CAD data 2-dim	Compressed	▶ DALI PRO 2 IoT CAD2PDF 280120
CAD data	Compressed	▶ DALI PRO 2 IoT IGS 280120
CAD data	Compressed	▶ DALI PRO 2 IoT STEP 280120
Mandatory Publications	PDF	▶ DALI Pro 2IoT CE 4196710 03 160823
Mandatory Publications	PDF	▶ DALI PRO 2IoT UKDoC 4361025 01 180923
Declarations of conformity	PDF	▶ DALI Pro 2 IoT CE 41966710 160920
User instruction	PDF	▶ DALI Pro 2 IoT

Equipment / Accessories

- Easy browser-based commissioning UI (for smart devices)

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172114189	DALI PRO 2 IOT	Shipping carton box 20 Pieces	235 x 199 x 372 mm	17.40 dm ³	5905.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

References / Links

Expert configuration software available at www.osram.com/software

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
info@alcom.be | www.alcom.be
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
 Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl