

MD900xRU Series

4:1 Input, 9W SIP, Single & Dual Output DC/DC Converters



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Key Features:

- 9W Output Power
- Miniature SIP Case
- 4:1 Input Voltage Range
- Short Circuit Protected
- 1,600 VDC Isolation
- Efficiency To 89%
- Over Voltage Protection
- Over Current Protection
- -40°C to +85°C Operation
- Industry Standard Pin-Out
- Low Cost

RoHS



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



Input Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	24 VDC Input 48 VDC Input	9.0 18.0	24.0 48.0	36.0 75.0	VDC
Under Voltage Lockout	24 VDC Input 48 VDC Input	7.0 14.0	8.9 16.0		VDC
Start Up Time	See Note 2	50.0			mS
Input Reflected Ripple Current				30.0	mA P - P
Input Filter					Capacitor Filter

Output Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy		±1.0		%	
Line Regulation	VIN = Min to Max 3.3 VOUT Models	±0.2		%	
Load Regulation, See Note 3	Other Single Output Models Dual Output Models	±1.0 ±0.5		%	
Cross Regulation	See Note 4	±1.0		%	
Ripple & Noise (20 MHz)	See Note 5	±5.0		%	
Transient Recovery Time, See Note 6	25% Load Step Change	75		mV P - P	
Transient Response Deviation		250		μSec	
Temperature Coefficient		±3.0		%	
Over Voltage Protection		±0.02		%/°C	
Over Current Protection		130		%	
Output Short Circuit		180		%	
				Continuous (Autorecovery)	

General Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage, See Note 7	Input to Output Case To Input or Output	1,600 1,000			VDC
Isolation Resistance		1,000		50	MΩ
Isolation Capacitance				50	pF
Switching Frequency	24 VIN Models 48 VIN Models	400 500			kHz

EMI Characteristics Parameter	Standard	Criteria	Level
Radiated Emissions, See Note 8	EN 55032		Class A
Conducted Emissions, See Note 8	EN 55032		Class A
ESD	EN 61000-4-2	B	±6 kV Contact, ±8 kV Air
RS	EN 61000-4-3	A	20V/rms
EFT, See Note 9	EN 61000-4-4	A	±2 kV
Surge, See Note 10	EN 61000-4-5	A	±2 kV
CS	EN 61000-4-6	A	10 Vrms
PFMF	EN 61000-4-8	A	100 A/m

Environmental Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient Case	-40	+25	+85	°C
Storage Temperature Range			+100		
Cooling		-55		+125	°C
Humidity	Free Air Convection				
	RH, Non-condensing			95	%

Physical Parameter					See Mechanical Diagram (Page 4)
Case Size					Black, Anodized Copper (UL94-V0)
Case Material					0.25 Oz (7.3g)

Reliability Specifications Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.0			MHours
Absolute Maximum Ratings Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	24 VDC Input 48 VDC Input	50.0 100.0			VDC
Lead Temperature	1.5 mm From Case for 10 Sec	260			°C

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33

info@alcom.be | www.alcom.be

Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands

Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

Model Selection Guide

www.micropowerdirect.com


Model Number	Input				Output			Efficiency (% Typ)	Capacitive Load (μ F, Max)	Fuse Rating Slow-Blow (mA)			
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)						
	Nominal	Range	Full-Load	No-Load									
MD924S-03RU	24	9.0 - 36.0	335	9	3.3	2,000	0.0	82	2,600	2,000			
MD924S-05RU	24	9.0 - 36.0	392	9	5.0	1,600	0.0	85	1,300	2,000			
MD924S-09RU	24	9.0 - 36.0	426	9	9.0	1,000	0.0	88	800	2,500			
MD924S-12RU	24	9.0 - 36.0	426	9	12.0	750	0.0	88	560	2,500			
MD924S-15RU	24	9.0 - 36.0	421	9	15.0	600	0.0	89	560	2,500			
MD924S-24RU	24	9.0 - 36.0	421	9	24.0	375	0.0	89	200	2,500			
MD924D-05RU	24	9.0 - 36.0	392	9	± 5.0	± 800	± 0.0	85	800	2,000			
MD924D-12RU	24	9.0 - 36.0	426	9	± 12.0	± 375	± 0.0	88	390	2,500			
MD924D-15RU	24	9.0 - 36.0	431	9	± 15.0	± 300	± 0.0	87	200	2,500			
MD948S-03RU	48	18.0 - 75.0	168	5	3.3	2,000	0.0	82	2,600	1,000			
MD948S-05RU	48	18.0 - 75.0	196	5	5.0	1,600	0.0	85	1,300	1,000			
MD948S-09RU	48	18.0 - 75.0	216	5	9.0	1,000	0.0	87	800	1,500			
MD948S-12RU	48	18.0 - 75.0	213	5	12.0	750	0.0	88	560	1,500			
MD948S-15RU	48	18.0 - 75.0	211	5	15.0	600	0.0	89	560	1,500			
MD948S-24RU	48	18.0 - 75.0	211	5	24.0	375	0.0	89	200	1,500			
MD948D-05RU	48	18.0 - 75.0	196	5	± 5.0	± 800	± 0.0	85	800	1,000			
MD948D-12RU	48	18.0 - 75.0	216	5	± 12.0	± 375	± 0.0	87	390	1,500			
MD948D-15RU	48	18.0 - 75.0	216	5	± 15.0	± 300	± 0.0	87	200	1,500			

2:1 Input Models Are Also Available See The MD900xRW

Notes:

1. The specified maximum capacitive load is for each output.
2. Start up time is specified at the nominal Voltage input and with a constant resistive load.
3. Load regulation is specified for a load change of 0% to 100%.
4. Cross regulation is specified with one output at full load while the other output is varied from 25% to 100% load.
5. Output ripple is measured with a 1 μ F ceramic capacitor and a 10 μ F electrolytic capacitor connected in parallel.
6. Transient recovery is measured to within a 1% error band for a load step change of 25%. Single 3.3 & 5 VDC output models have a response deviation of $\pm 5.0\%$ Max.
7. Isolation voltage ratings are for 60 seconds.
8. With the addition of external filter and protection components, all models will meet the requirements of EN 55032 Class A. Suggested input circuits are shown in the connection diagrams on page 3. Contact the factory for more information.
9. To meet the requirements of EN 61000-4-4 (± 2 kV), external components are needed. The connection diagrams on page 3 shows external components that would typically achieve this. Contact the factory for more information.
10. To meet the requirements of EN 61000-4-5 (± 2 kV), external components are needed. This can be done as shown in the connection diagrams on page 3. Contact the factory for more information.
11. Operation at no-load will not damage the unit, but they may not meet all specifications.
12. It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Derating Curve

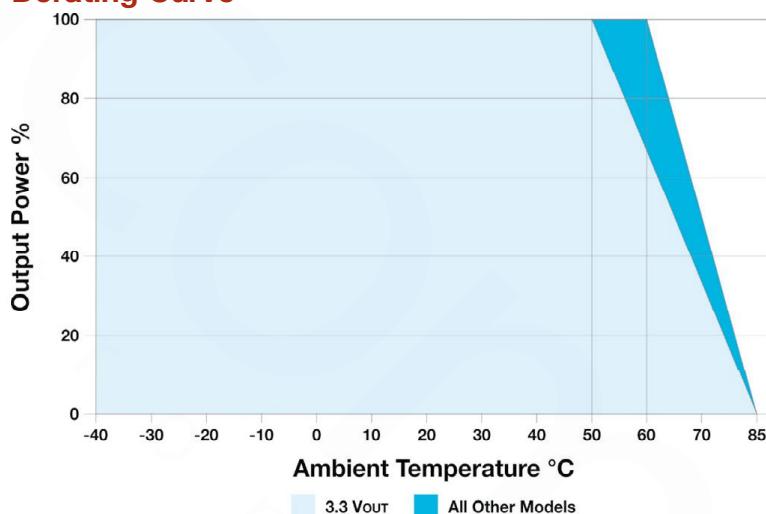

Remote ON/OFF Control



The MD900x-RU may be started or shutdown by the control pin (pin 3). This input is current controlled. The unit operates when this input is left open. When the input is "high" (current is flowing into the pin), the converter shuts down. The input current to this pin must be kept between 2 mA to 4 mA.

The diagram at right shows a simple input circuit for the control pin. Closing the switch causes 2 - 4 mA to flow through the 1 kΩ resistor, shutting the unit off.

For applications that require meeting EMC standards, the diagrams below illustrate typical connections of the MD900xRU series. Some notes on this diagram (starting with the input circuit) are:

1. An external fuse should be used in all power module applications. The recommended fuse is shown in the model chart on page 2.
2. To protect against voltage spikes, it is recommended that a TVS be used on the input. A suggested value is given in the tables below.


Recommended component values are:

Component	Value
C1	330 μ F/100V
TVS	3KW, 70V
C2, C3, C4	1210 106M/35V
L1	20 μ H
L2	20 μ H
C5, C6, C7, C8	1808 221K/3kV
C9	10 μ F
C10	1 μ F


www.micropowerdirect.com

3. The output filtering components C9 & C11 are high frequency, low ESR electrolytic capacitors. Capacitors C10 & C12 are ceramic. Care must be taken in choosing these capacitors not to exceed the capacitive load specification for the unit. Voltage derating of capacitors should be 80% or above.


Typical Connection: 24 VIN, Single Output Models

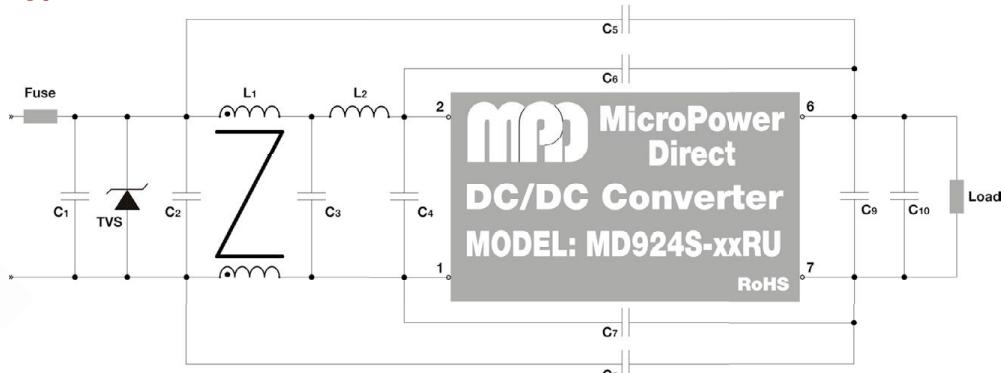


Typical Connection: 24 VIN, Dual Output Models

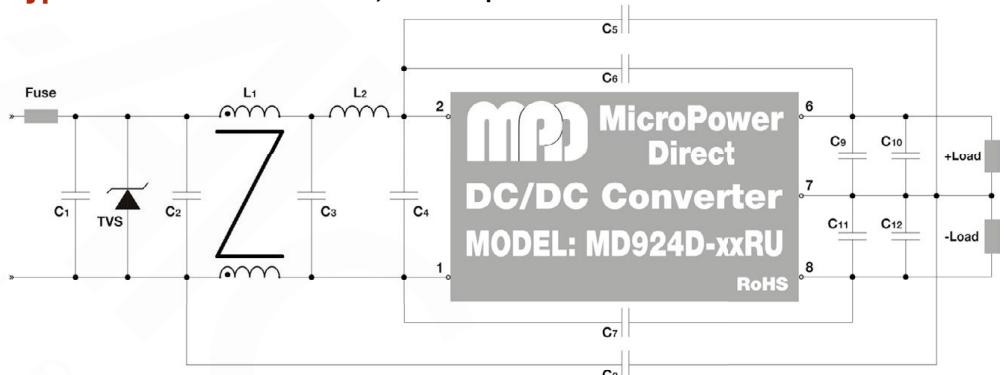


Typical Connection: 48 VIN, Single Output Models

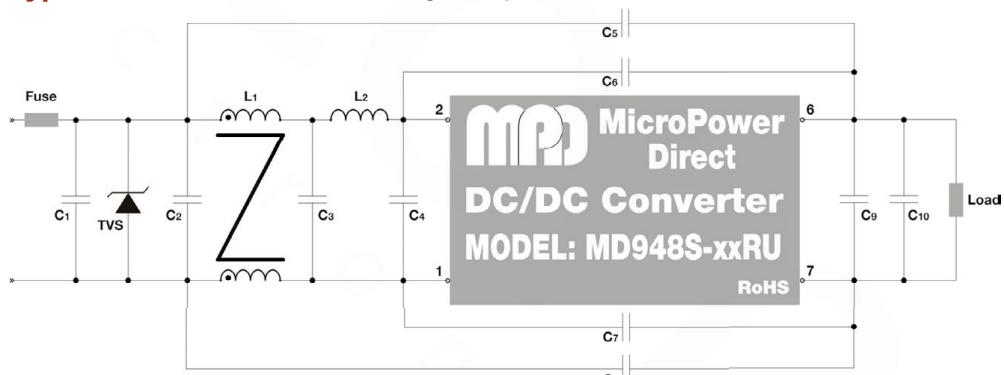

Typical Connection: 48 VIN, Dual Output Models

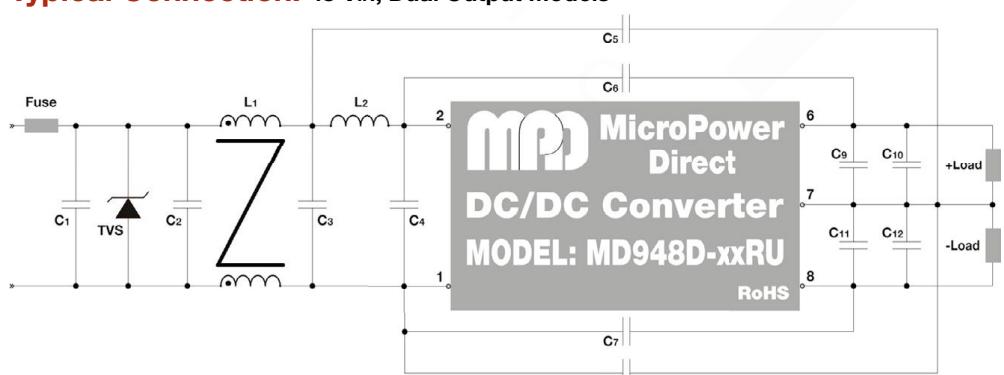

Mechanical Dimensions

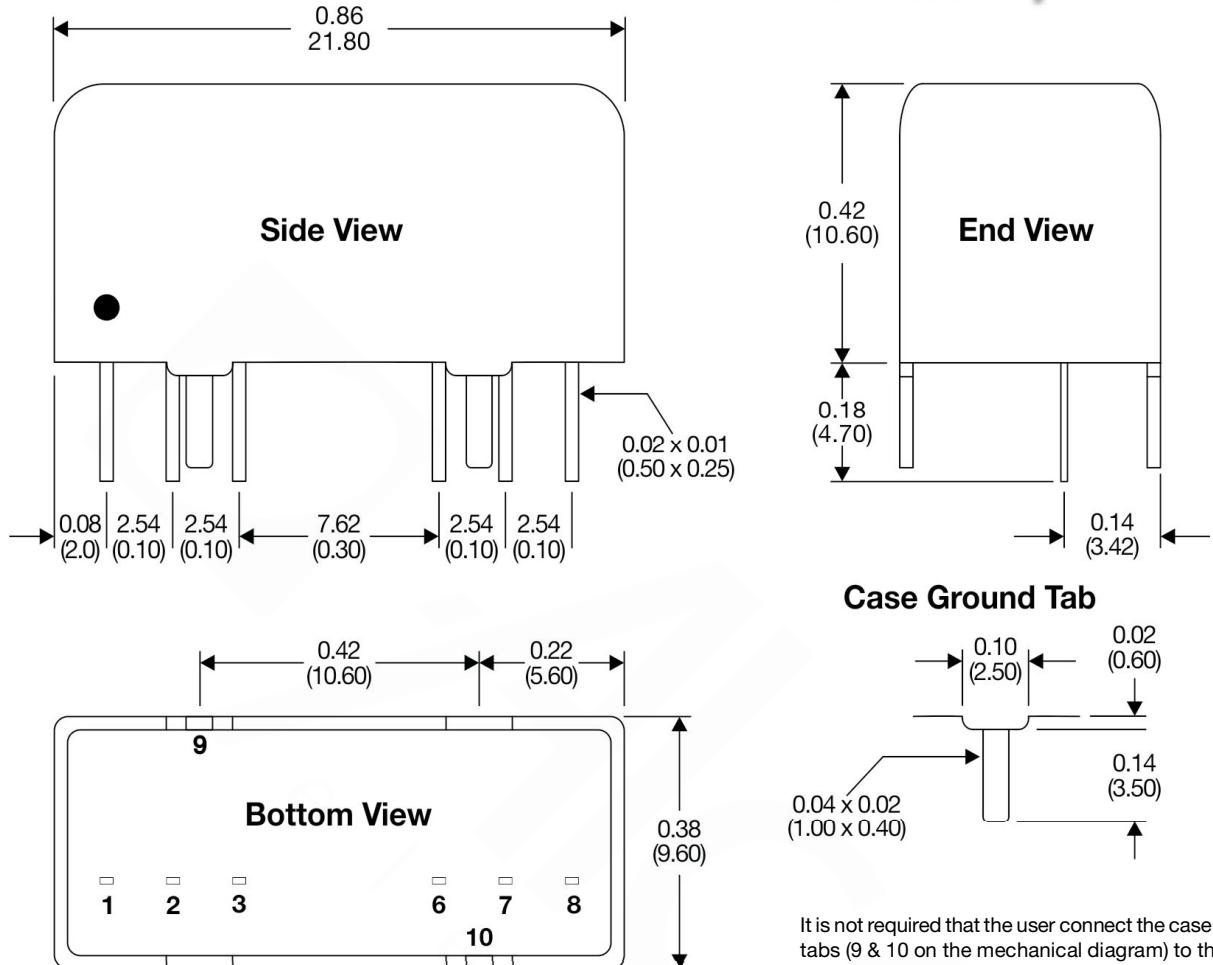

Pin Connections

Pin	Single Output	Pin	Dual Output
1	-VIN	1	-VIN
2	+VIN	2	+VIN
3	Remote On/Off	3	Remote On/Off
6	+VOUT	6	+VOUT
7	-VOUT	7	Common
8	No Connection	8	-VOUT
9	Case	9	Case
10	Case	10	Case

It is not required that the user connect the case ground tabs (9 & 10 on the mechanical diagram) to the PCB. However, connecting one or both tabs to a ground plane on the PCB will help:

- Improve the unit's resistance to vibration
- Improve the unit's ability to dissipate heat
- Improve the unit's resistance to ESD

Call the factory for more information

Notes:

- All dimensions are typical in inches (mm)
- Pin Section Tolerance x.XXX = ±0.004 (±0.100)
- General Tolerance x.XX = ±0.01 (±0.25)
- Pin 1 is marked by a "dot" or indentation on the top of the unit

Also Available: MD900xRW

Key Features:

- 9W Output Power
- Miniature SIP Case
- 2:1 Input Voltage Range
- 27 Single & Dual Output Models
- 1,600 VDC Isolation
- Miniature SIP Case
- -40°C to +85°C Operation



MicroPower Direct
We Power Your Success - For Less!

Alcom
electronics

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33

info@alcom.be | www.alcom.be

Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands

Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl