

Curved Display

Model	Product Type	Brightness (cd/m ²)	Glass Thickness
43" UHD	1500 R OC / LCM / Panel +	LCM 500 / Panel + 400	0.2 / 0.2
50" UHD	1500 R OC		0.2 / 0.2
55" UHD	800R OC		0.2 / 0.2

FHD / UHD Display

Model	Resolution (pixel)	Brightness (cd/m ²)	Remark
21.5" FHD	1920 x 1080	250 / 300 / 500*	Portrait / Landscape available *24/7 operation
23.8" FHD	1920 x 1080	250	
27" FHD	1920 x 1080	300 / 350 / 500*	Portrait / Landscape available *24/7 operation
32"	1920 v	400 /	Portrait / Landscape

FHD	1080	500*	available
-----	------	------	-----------

*24/7 operation

42" FHD	1920 x 1080	400	Portrait / Landscape available
---------	-------------	-----	-----------------------------------

43" FHD	1920 x 1080	500	Portrait / Landscape available 24/7 operation
---------	-------------	-----	---

46" FHD	1920 x 1080	500 / 700	Portrait / Landscape available 24/7 operation
---------	-------------	-----------	---

UHD Display

Model	Resolution (pixels)	Brightness (cd/m ²)	Remark
43" UHD	3840 x 2160	500 / 700	Portrait / Landscape available 24/7 operation
55" UHD	3840 x 2160	500 / 700	Portrait / Landscape available 24/7 operation

65" UHD	3840 x 2160	500 / 700	Portrait / Landscape available 24/7 operation
---------	-------------	-----------	---

ePID UHD OC

Model	Resolution (pixel)	Features	Remark
43" UHD	3840 x 2160	High Haze POL 24/7 operation (500 nits)	Portrait / Landscape available 24/7 operation
50" UHD	3840 x 2160	High Haze POL 24/7 operation (500 nits)	Portrait / Landscape available 24/7 operation
55" UHD	3840 x 2160	High Haze POL 24/7 operation (500 nits)	Portrait / Landscape available 24/7 operation
65"	3840	High Haze POL	Portrait / Landscape

UHD	^ 2160	24/7 oper ation (500 nits)	available
86" UHD	5120 x 2160	High Haze POL 24/7 oper ation (500 nits)	Portrait / Landscape available

IFPD Display

Model	Resolutio n (pixel)	Brightnes s (cd/m2)	Cell Border U / L / R / D (mm)
65"	3840 x 2160	400 On Cell Touc h	8.8 / 5.9 / 5.9 / 5.9
86"	3840 x 2160	400	9 / 9 / 9 / 9

Outdoor Display

Model	Resolutio n (pixel)	Brightnes s (cd/m2)	Remark
21.5"	1920 x 1080	1500	High Tni Liquid Crystal -40 °C~110 °C Sun light readable 24/7 operation

High Tni Liquid
Crystal

32" 1920 1500
x /
1080 2500

Sun light
readable

24/7 operation

43" 1920 1500
x /
1080 2500

Sun light
readable

24/7 operation

46" 1920 1500
x /
1080 2500


Sun light
readable

24/7 operation

55" 1920
x
1080 2500

Sun light
readable

24/7 operation

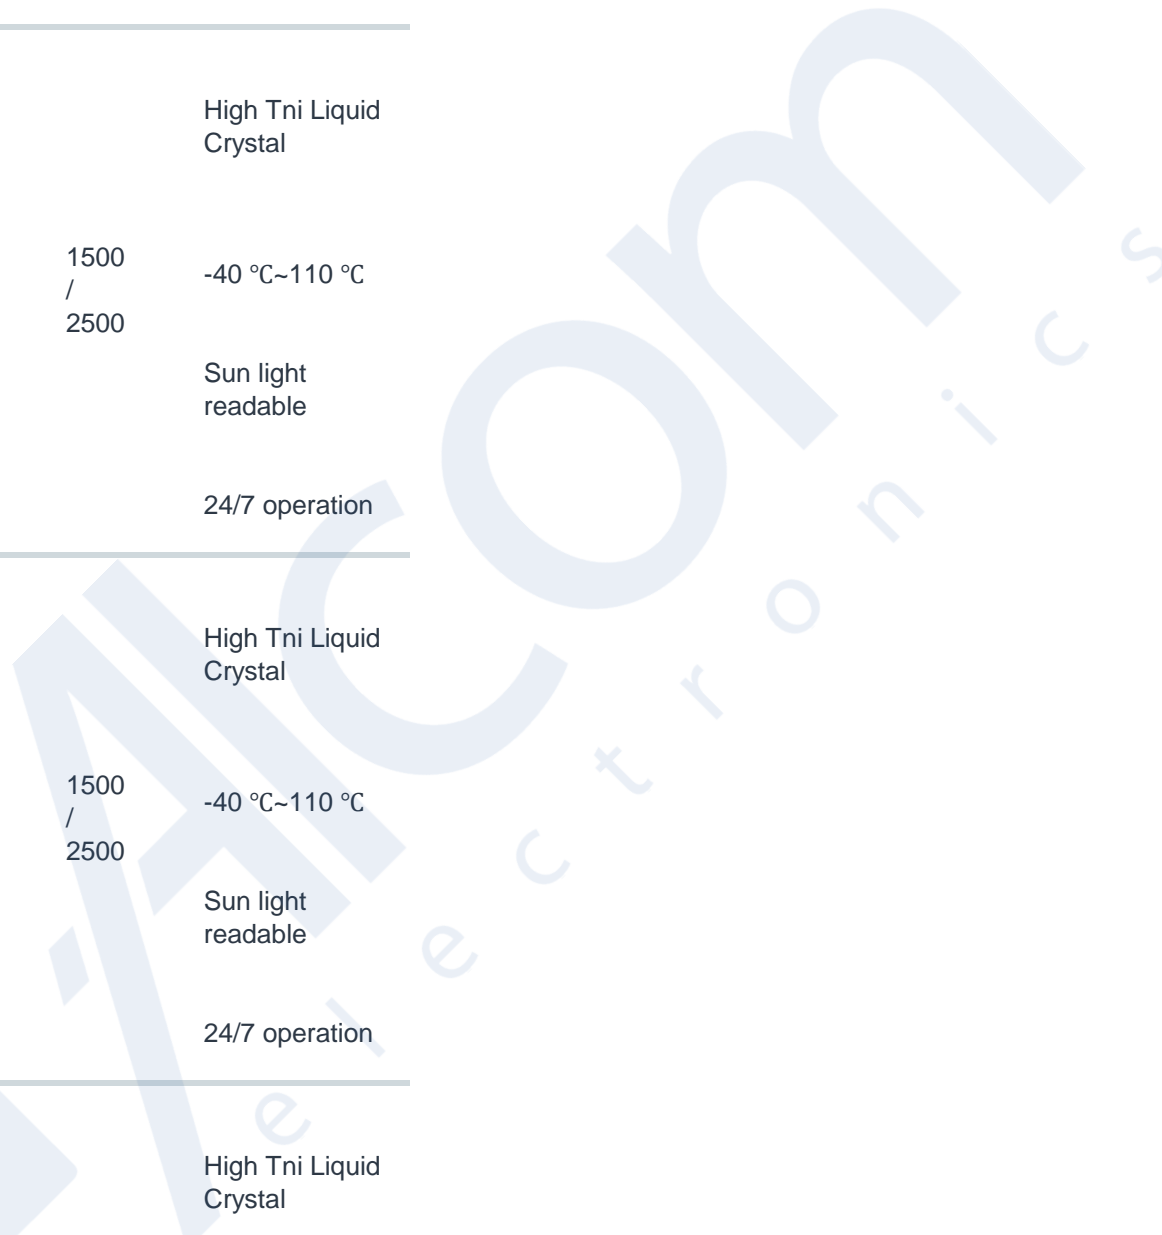

High Tni Liquid
Crystal

65" 1920
x
1080 2500 -40 °C~110 °C

Sun light
readable

24/7 operation

TARTAN Display

Model	Resolution (pixel)	Brightness (cd/m2)	Remark
28" Stretch	1920 x 360	700	Aspect Ratio 48:9 24/7 operation
28.6" Stretch	1920 x 540	700	Aspect Ratio 32:9 24/7 operation
29.4" Stretch	1920 x 720	700	Aspect Ratio 24:9 24/7 operation
36.6" Stretch	1920 x 290	700	Aspect Ratio 60:9 24/7 operation
37" Stretch	1920 x 540	700 / 1500 / 2500	Aspect Ratio 32:9 24/7 operation

42" Stretch	1920 x 480	700 / 1500 / 2500	Aspect Ratio 36:9 24/7 operation
48.3" Stretch	1920 x 320	700	Aspect Ratio 54:9 24/7 operation
48.5" Stretch	1920 x 360	700	Aspect Ratio 48:9 24/7 operation
49.5" Stretch	1920 x 540	1500 / 2500	Aspect Ratio 32:9 24/7 operation

TARTAN - UHD/WUHD Stretched Display

Model	Resolution (pixel)	Brightness (cd/m ²)	Remark
43" Stretch	3840 x 720	700	Aspect Ratio 48:9 24/7 operation
43.9" Stretch	3840 x 1080	700	Aspect Ratio 32:9 24/7 operation
56.6" Stretch	3840 x 430	700	Aspect Ratio 80:9 24/7 operation

58.4" Stretch	3840 x 1080	700	Aspect Ratio 32:9 24/7 operation
------------------	-------------------	-----	--

58.6" Stretch	5120 x 1440	700	Aspect Ratio 32:9 24/7 operation
------------------	-------------------	-----	--

TARTAN - Square Display

Model	Resolution (pixel)	Brightness (cd/m2)	Active Area (mm)	remark
28.1" Square	800 x 800	700	504 x 504	24/7 operation
35.3" Square (8:9)	1600 x 1800	500	595 x 670	24/7 operation
44.9" Square	1280 x 1280	700	806 x 806	24/7 operation

TARTAN - Round Display

Model	Resolution (pixel)	Brightness (cd/m2)	Active Area (mm)	Remark
23.6" Round	848 x 848	700	600	24/7 operation

iCafe High Frame Rate Display

Model	Resolution (pixel)	Frame Rate (Hz)	Product Type
32" FHD	1920 x 1080	144	OC

39" QHD	2560 x 1440	165	OC
43" UHD	3840 x 2160	144	OC
55" UHD	3840 x 2160	144	OC

Information may change without notice.



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl