

Taoglas Invisible Antenna™

Part No: TFX257.A

Description

TFX257.A - Wi-Fi Transparent Antenna

Features:

Wi-Fi (including Wi-Fi 6) 2.4-2.5, 4.9-5.8, 5.9-7.125GHz Transparent – Ultra Low Profile Dimensions: 32mm * 114mm Connector: FAKRA Code I (M) Beige RoHS & Reach Compliant



www.taoglas.com

Singel 3 | B-2550 Kontich | Belgium | Tel. + 32 (0)3 458 30 33 | info@alcom.be | www.alcom.be Rivium 1e straat 52 | 2909 LE Capelle aan den Ijssel | The Netherlands | Tel. + 31 (0)10 288 25 00 | info@alcom.nl | www.alcom.n



1	Introduction	2
1.	Introduction	2
2.	Specification	3
3.	Antenna Characteristics	4
4.	Radiation Patterns	8
5.	Mechanical Drawing	18
6.	Packaging	19
	Changelog	20

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.





Introduction



The TFX257 is a first of its kind, invisible antenna designed to cover the entire spectrum of Wi-Fi bands. The TFX257 has been expertly engineered by Taoglas with innovation in mind, the design is based on our excellent design history in pioneering flexible PCB antenna technology. TFX257 is supplied with pre adhered adhesive for ease of installation and has an enclosed carrier terminated with a FAKRA connector.

The invisible flexible antennas are an alternative to standard Flexible PCB antennas where the user may want to install an antenna in a covert area or on a surface, they may want to keep visible. The performance of the antenna is based on the environment where it is placed, care should be taken to mount at least 20mm from metal components where possible.

Typical Applications Include:

- Automotive and Commercial Transportation
- EV Charging and Parking Bays
- Digital Signage and Display screens
- Point Of Sale Kiosks

The installation of the Taoglas Invisible Antenna[™] series follows a similar installation method to flexible PCB antennas. Installing a transparent material may show obvious flaws/debris, take care to wipe the area clean before adhering the antenna. The flexible antenna can be disconnected from the body to make installation easier. Where support may be an issue, we would advise using a double-sided adhesive on the housing to ensure the housing body installation does not add any additional pull force to the antenna as this will affect the antennas performance and the adhesive's performance. The feed is not designed to be load bearing and loads of over 0.5Kg can break or damage the feed resulting in the antenna disconnecting.

The TFX257 is connected via a FAKRA Code I male connector for ease of installation. If a custom connector is required, please contact your regional Taoglas customer support team.



Specification

2.

Electrical								
Band	Frequency (MHz)	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
Wi-Fi 2.4GHz	2400-2500	55.3	-2.58	4.59				
Wi-Fi 5	5150-5850	41.6	-3.81	3.58	50 Ω	Linear	Omni	2W
Wi-Fi 6	5925-7125	31.0	-5.09	2.04				

*Tested on 4mm Acrylic.

Mechanical					
Dimensions	32 x 114mm				
Weight	5g				
Material (Housing)	ABS/PC				
Material (Antenna)	PET				
VLT (Visible Light Transmission)	78.1% TCF (Transparent Conductive Film)				
Connector	Code I FAKRA (M) Beige				

	Environmental
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	Non-condensing TBD°C TBD% RH






Antenna Characteristics










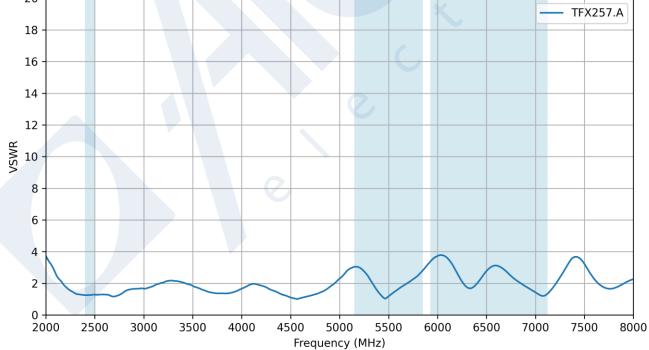



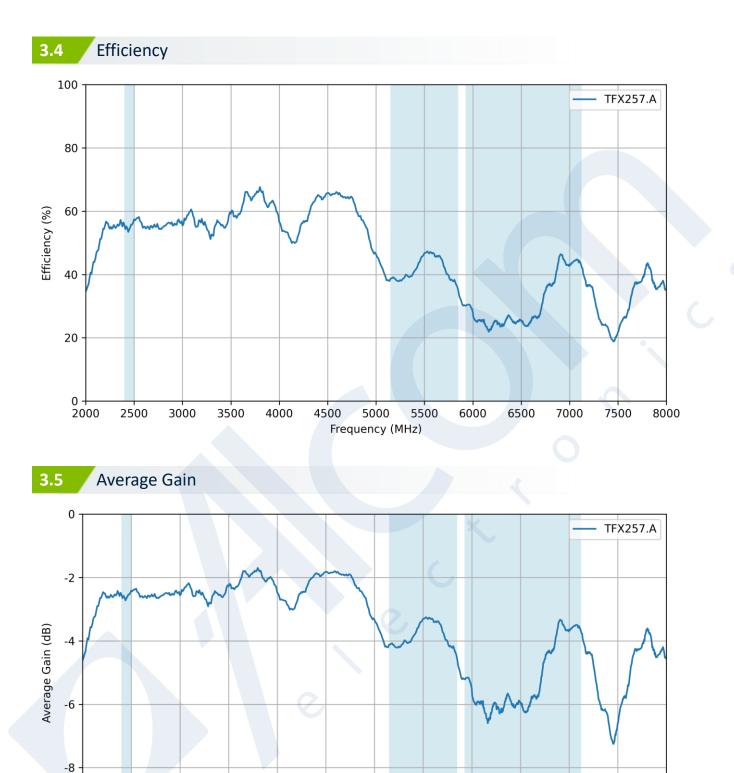

-10 -

. Frequency (MHz)













4.

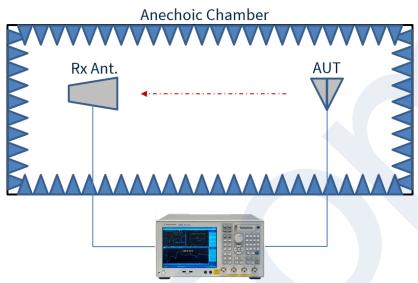



Vector Network Analyzer








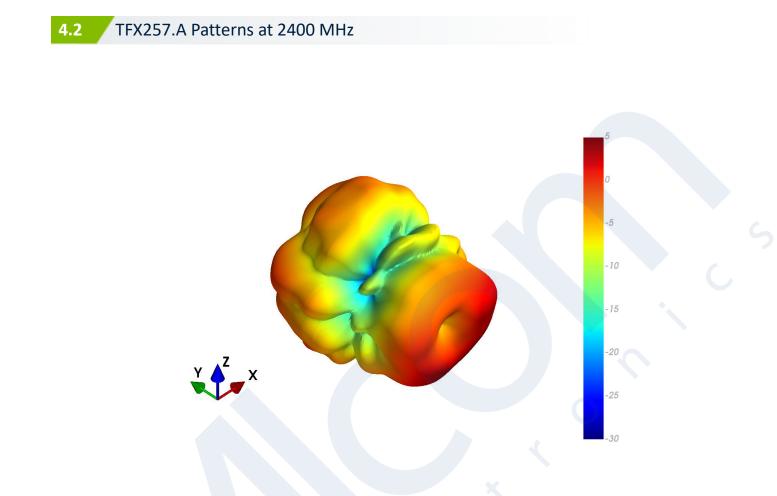


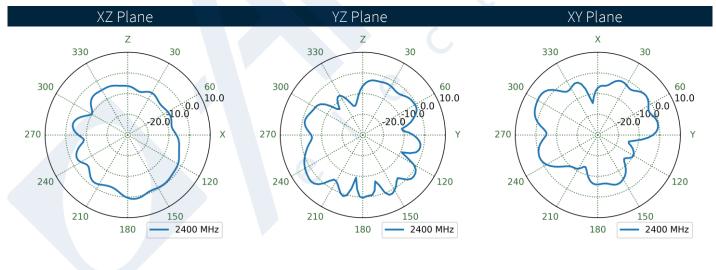






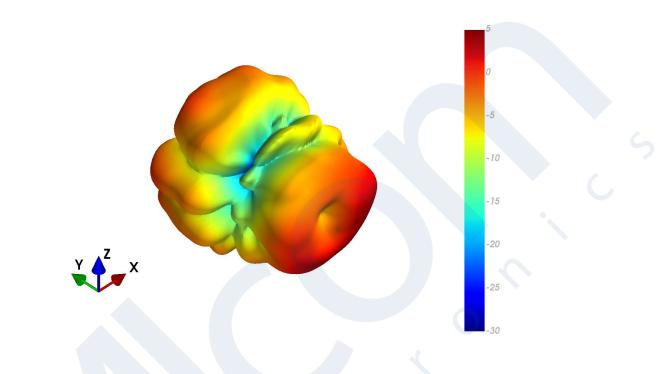


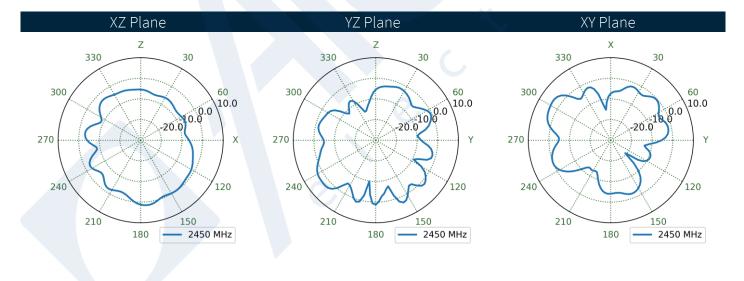






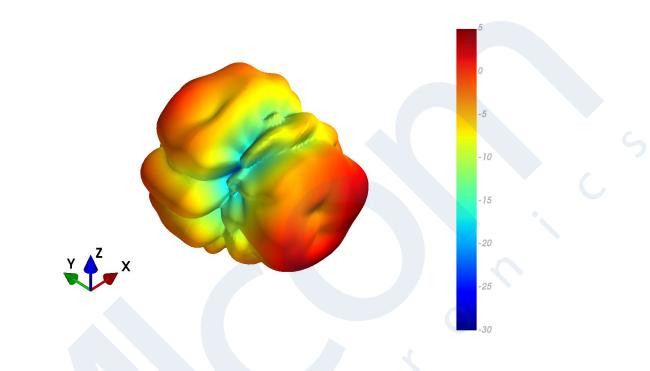


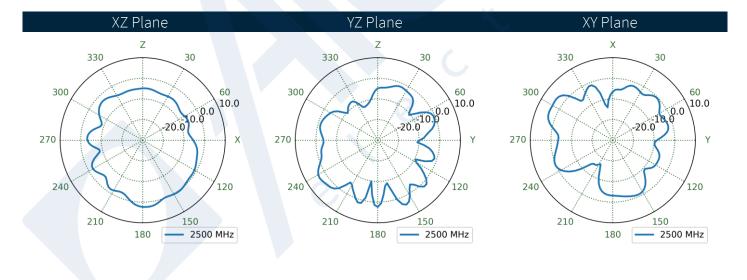






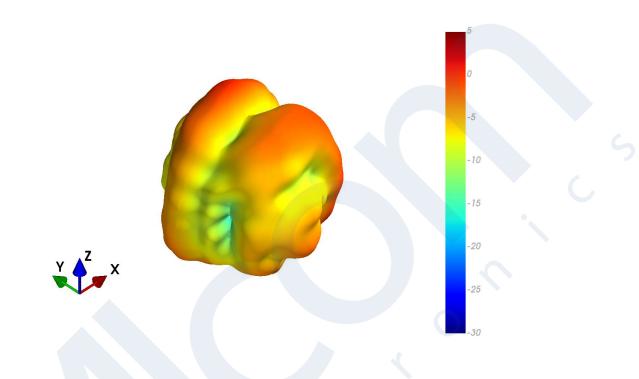


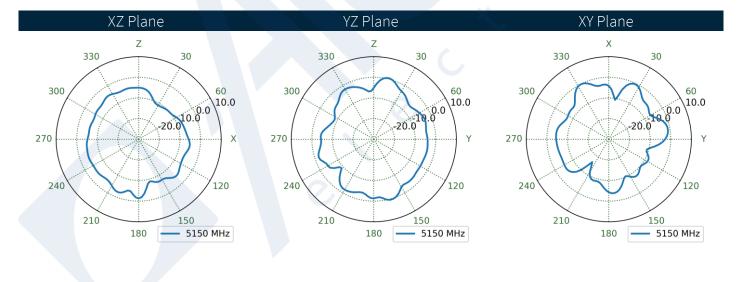





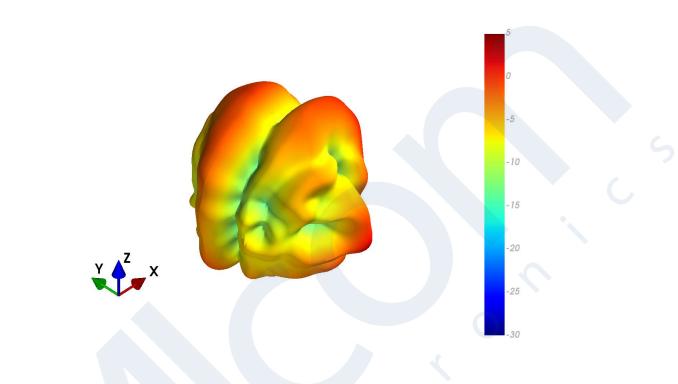

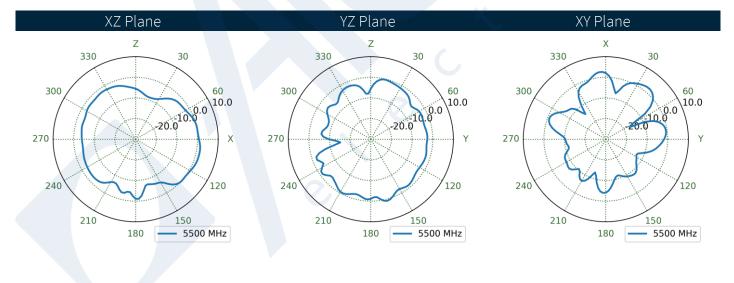







TFX257.A Patterns at 5850 MHz

z_x

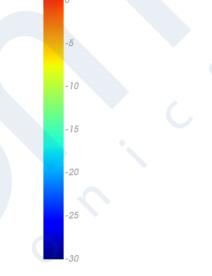


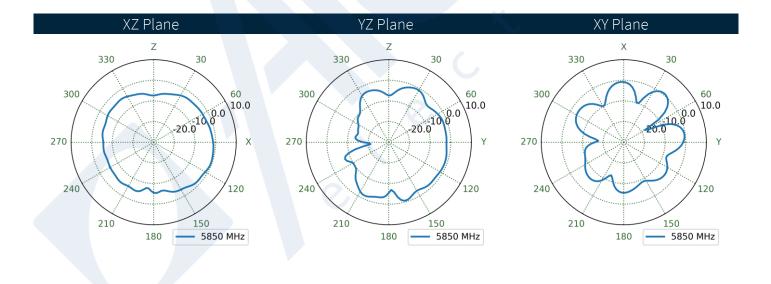


4.7






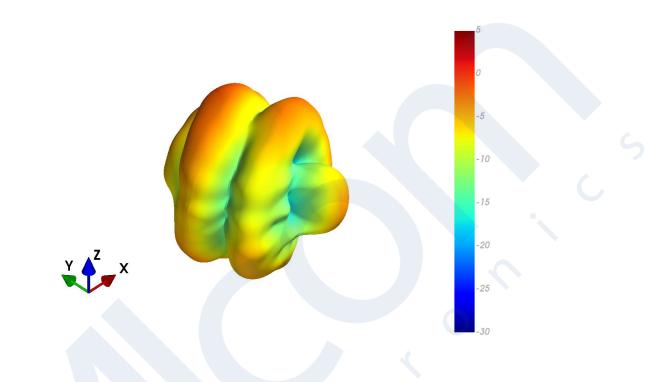


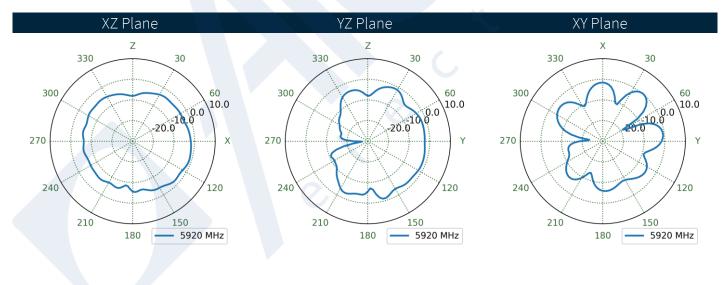







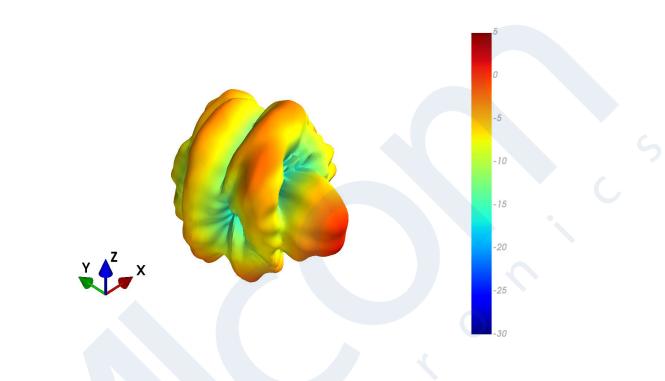

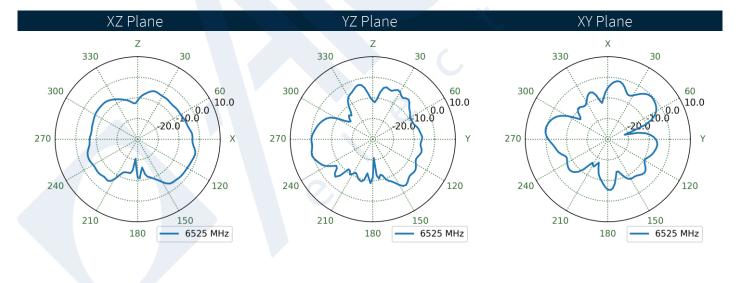




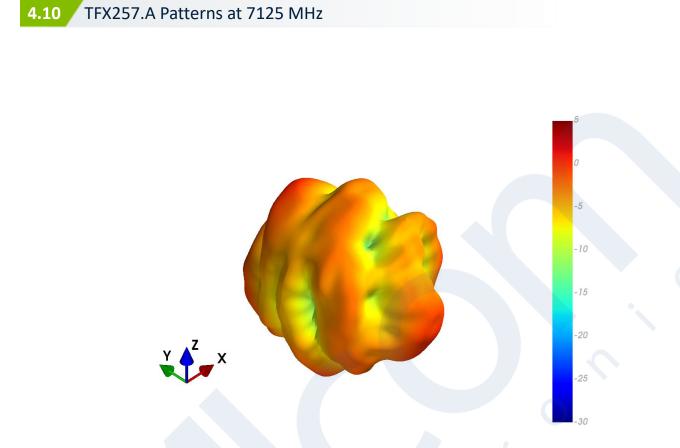

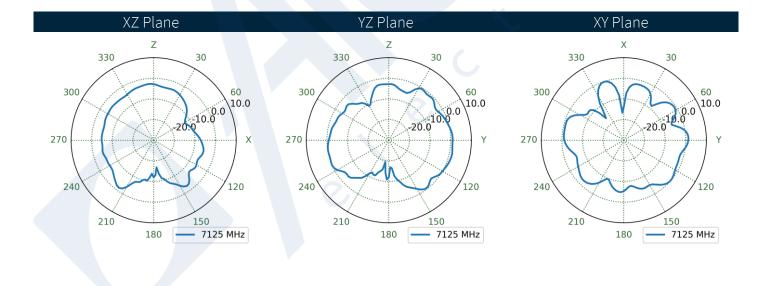



5.

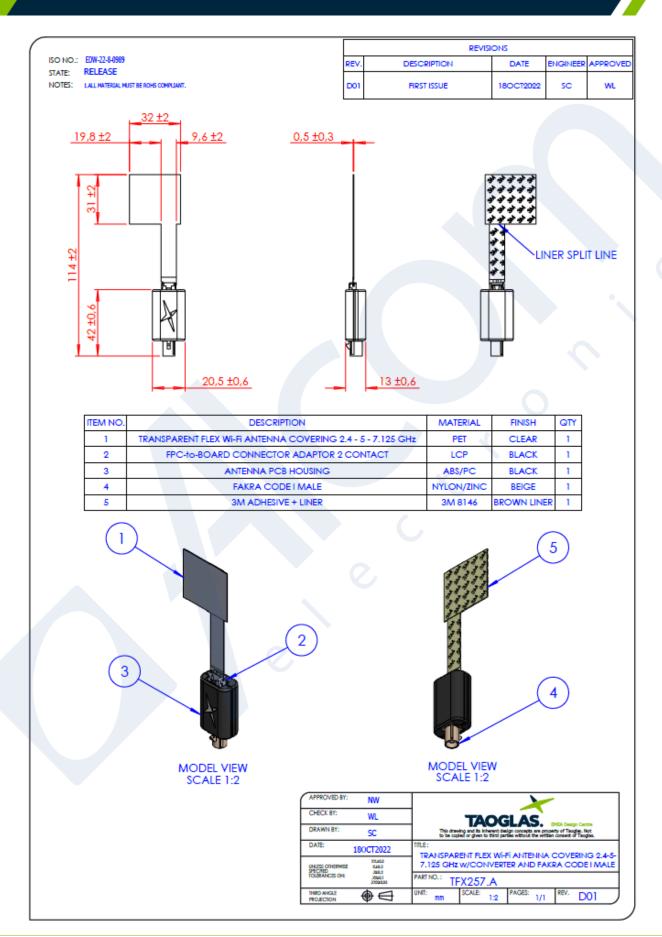







 SPE-22-8-163 – TFX257.A

 Revision: B (Current Version)

 Date:
 2023-05-18

 Notes:
 Updated Specifications

 Author:
 Cesar Sousa

Previous Revisions

Revision: A (Original First Release)		
Date:	2022-10-14	
Notes:	Initial Release	
Author:	Gary West	



TAOGLAS.

www.taoglas.com

Alcom

Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be Rivium 1e straat 52 | 2909 LE Capelle aan den Ijssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl