

TQMa62xx

Arm® Family



HIGHLIGHTS

- ▶ 4/2/1 Cortex A53 – scalable computing performance
- ▶ Dual Display LVDS / RGB + 3D GPU
- ▶ LPDDR4 support with ECC
- ▶ High-speed communication via 2x Gbit Ethernet switch (TSN), 3 x CAN FD, 2x USB 2.0 interface
- ▶ Low power consumption (typ. 2 W)
- ▶ Integrated security functions


Embedded Cortex®-A53 module based on TI AM62xx for applications with enhanced computing & scalable graphics performance

TECHNICAL SPECIFICATION

CPU	AM6254, AM6252, AM6251, AM6234, AM6232, AM6231
Interfaces	Up to 2x Gbit-Ethernet switch (TSN) Up to 2x USB 2.0 interface Up to 3x CAN FD Up to 9x UART
Periphery interfaces	Up to 3x SDIO Up to 6x I ² C Up to 5x SPI Up to 1x GPMC Up to 1x OSPI Up to 3x PWM 3x McASP (Audio)
Graphic	1x LVDS (8 lanes) 1x RGB (24bit) 3D GPU (8G FLOPS) Camera: 1x CSI-Rx (4 lanes)
Memory	LPDDR4: Up to 2GB NOR: Up to 256 MB (TBD) eMMC: up to 64 GB EEPROM: 0/64-kbit

Other	Real Time Clock (RTC) Secure Element SE050 Temperature sensor CPU JTAG interface
Power supply	3,3V
Ambient conditions	Standard temperature range: -25°C...+85°C Extended temperature range: -40°C...+85°C
Dimensions	58 mm x 32 mm (TBD)
Plug-in system	Board to board plug in system 320 pins (TBD)
Operating systems	Linux
Operating systems on request	(TBD)

BLOCK DIAGRAM TQMa62xx

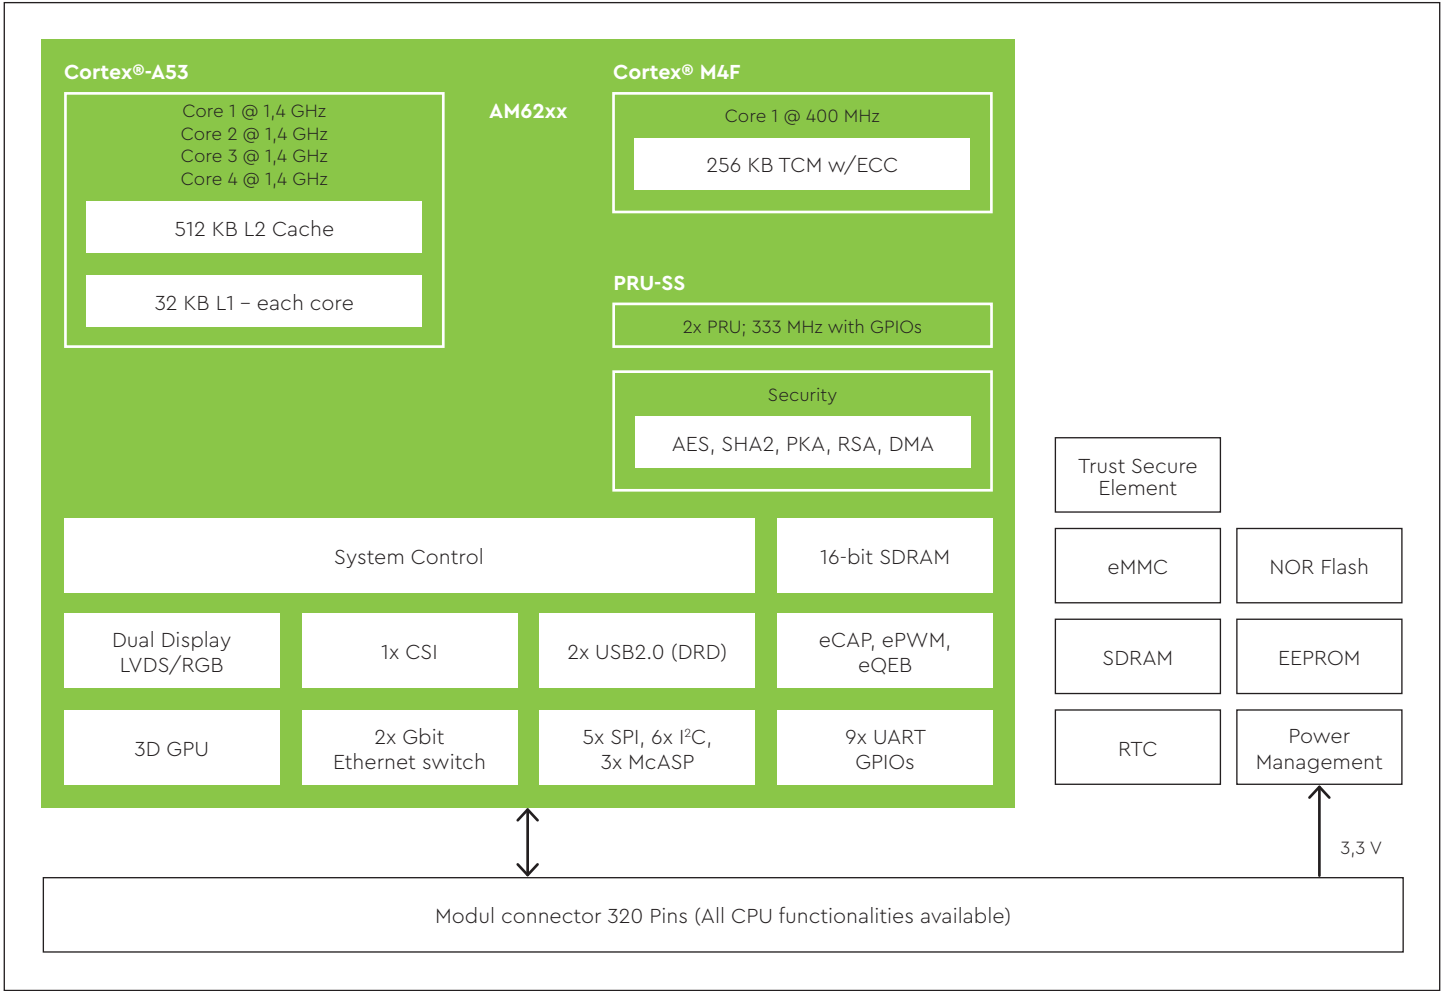

ORDERING INFORMATION

TQMa6254-AA	TQMa6254-AA, Quad Cortex®- A53 / 1,4GHz, Cortex®- M4 / 400MHz, 64 MB NOR Flash, 1GB SDRAM, with 3D GPU, 64 kB EEPROM, RTC, -40°C...+85°C
TQMa6231-AA	TQMa6231 -AA, Single Cortex®- A53 / 1,4GHz, Cortex®- M4 / 400MHz, 64 MB NOR Flash, 1GB SDRAM, 64 kB EEPROM, RTC, -40°C...+85°C
	Other configurations on request
STKa62xx-AA (Prototypes Q2/2023)	STKa62xx (Eval Kit) with TQMa62xx-AA, Dual Cortex®- A53 / 1GHz, Cortex®- M4 / 400MHz, 64 MB NOR Flash, 1GB SDRAM, 64 kB EEPROM, RTC, 2x ETH 10/100/1000 (TSN), 2x CAN FD, 1x USB 2.0 OTG, 1x USB Debug, 2x USB2.0., Audio, 1x LVDS, IOT & WLAN Module, 1x CSI Kamera, GPIOs (4x 24V_IN, 4x 24V_OUT, 2x AI_IN), Pinheader (PRU Signals, GPIOs, SPI, I2C), Reset-Button, mikro SD Card interface, Power Supply, 4 GB SD card, Cables
Starterkit STKa62xx set	The core of the STKa62xx set is the TQMa62xx module with a Dual Cortex®-A53 CPU. The components contained in the starter kit constitute a modular system enabling you to develop your own product ideas. To develop your own hardware you can use the certified and qualified circuit components of the starter kit in your own designs.



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl