

IEC-3900

Digital Signage Player with 7th Generation Intel® Core™ i7/ i5 processor



Features

- 7th Gen. Intel® Core™ i7/ i5 processor installed
- Support 2 x HDMI with independent video outputs
- Support 1 x COM, 4 x USB3.0, 1 x GbE port
- Support Intel vPro & AMT
- **Wide range operating temperature: -40 ~70°C**

System

CPU	Soldered onboard 7 th Gen. Intel® Core™ i7-7600U 2.8GHz (base)/ 3.9GHz (Turbo); i5-7300U 2.6GHz (base)/ 3.5GHz (Turbo); Processor
Memory	Two DDR4 SO-DIMM sockets, supporting up to 16GB memory
Graphics	Integrated Intel HD Graphics 620
Storage	M.2 m-key 2280 socket, supporting SATA SSD upgradable to 128GB
LAN Chipset	1 x Intel® i219LM PCIe GbE PHY, support vPro & AMT
Watchdog Timer	1~255 levels reset

I/O

Serial Port	1 x RS-232 port with RJ-45 connector
USB Port	4 x USB 3.0 ports
LAN	1 x RJ-45 ports for GbE
Video Port	2 x HDMI video outputs, support 4K/60Hz on both HDMI ports simultaneously

Environmental

Operating Temp.	-40 ~ 70°C (-40 ~ 158°F), ambient w/ air flow
Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Vibration	1.0 Grms, IEC 60068-2-64, random, 5 ~500 Hz, 1 Oct./min, 1 hr/axis, operation
Shock	Operating 10G (11ms), non-operating 20G

Qualification

Certification	CE, FCC Class A
---------------	-----------------

Power Requirement

Power Input	DC 24V/2A input
Power Consumption	Max. 60W

Mechanical


Construction	Aluminum alloy
Mounting	Wall-mount
Weight	0.73 Kg (1.61 lb)
Dimensions (W x D x H)	130 x 124 x 35 mm (5.12" x 4.88" x 1.37")

OS Support


Windows 10 IoT / Linux

Ordering Information

IEC-3900-7600U	Digital Signage Player with Intel® Core™ i7-7600U, w/ 2xHDMI, power adapter
IEC-3900-7300U	Digital Signage Player with Intel® Core™ i5-7300U, w/ 2xHDMI, power adapter



Dimensions

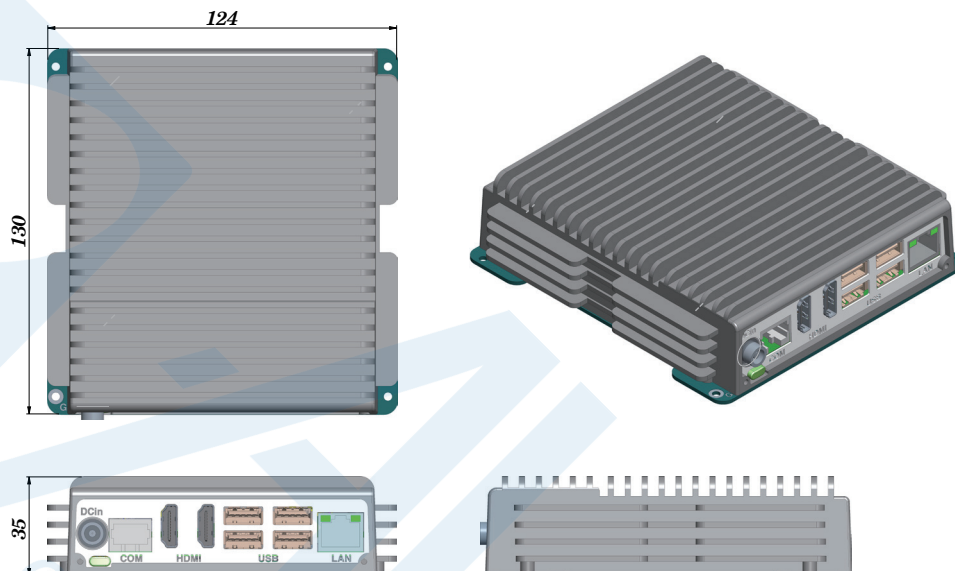

Optional Configuration (CTOS* Kit)

SSD	64GB M.2 SSD
SSD	128GB M.2 SSD
DDR4 4GB	260-pin DDR4-2133 4GB SO-DIMM
DDR4 8GB	260-pin DDR4-2133 8GB SO-DIMM



*CTOS means *Configure-to-Order Service*.