


NXP i.MX 95 – The Secure, Intelligent Edge


conga-SMX95

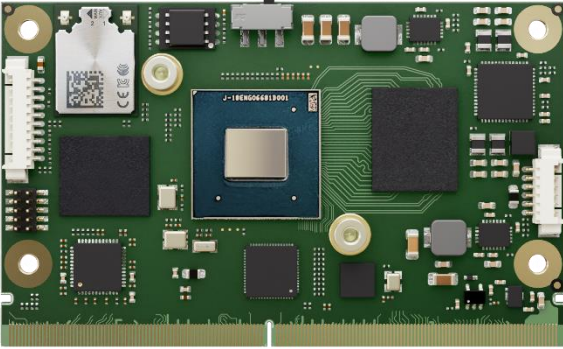

- SMARC Module based on NXP i.MX 95 processor series | up to 6-core ARM Cortex-A55
- NXP eIQ® Neutron NPU for high-speed data processing, Machine Learning and Vision
- Advanced Security with EdgeLock™ and Cryptographic Engine
- Ultra low power architecture with 3-8W
- Temperature range up to -40°C .. +85°C

Form factor	SMARC Specification 2.1.1				
CPU SoC	NXP i.MX 95 Processor Cores				
	ARM Cortex-A55 6-core @ 1.8 GHz (ind) 6-core @ 2 GHz (com)	ARM Cortex-M7 1-core @ 1GHz	ARM Cortex-M33 1-core @ 1 GHz	eIQ® Neutron NPU up to 2 TOPS	ARM Mali™ GPU G310 up to 128 GFLOPS (FP16) + 2D
DRAM	Up to 16 GByte onboard LPDDR5 memory up to 6400 MT/s inline ECC				
Ethernet	2x Gbit Ethernet with support for TSN IEEE 1588				
I/O Interfaces	1x dual-role USB 2.0 2x USB 2.0 2x USB 3.0 1x SDIO 3.0 2x PCIe 3.0 1-lane 2x I ² C 1x SPI 1x QSPI up to 3x UART (2x with Handshake) 2x CAN FD 14x GPIO optional soldered M.2 1216 WiFi 6/BT 5.3				
Mass Storage	eMMC 5.1 up to 256 GByte				
Sound	2x I ² S HiFi 4 DSP				
Graphics	Integrated in SoC Arm® Mali™ 3D GPU G310 2D GPU supporting blend graphics overlays OpenGL® ES 3.2 Vulkan® 1.2 OpenCL 3.0				
Video Interfaces	1x dual channel 24-bit LVDS 1x Display Port 1.4 1080p60 through MIPI-DSI to DisplayPort Bridge (shared with MIPI-DSI) optional MIPI-DSI capable of supporting 4kp30 or 3840p60 shared with DisplayPort 1x optional HDMI 2.0a through MIPI-DSI to HDMI bridge (shared with MIPI-DSI) up to 2x MIPI-CSI 4-lanes 2x integrated Image Signal Processor (ISP) for cameras with up to 12 MP resolution (on selected processor SKU's)				
Features	Watchdog Timer Cortex-M7 and Cortex-M33 console optional JTAG debug interface high-precision Real Time Clock				
AI & Machine Learning	NXP eIQ® Neutron Neural Processing Unit (NPU) with up to 2 TOPS NXP eIQ® ML Software Development Environment				
Security	NXP EdgeLock® 2GO key management services Cryptographic Acceleration and Assurance Module Resource Domain Controller ARM® TrustZone® High Assurance Boot support SHE, Encryption Engine AES-128, AES-256, 3DES, RC4, RSA4096, TRNG, SHA-1, SHA-2, SHA-256, MD-5 RSA-1024, 2048, 3072, 4096 and secure key storage side channel attack resistance				
Boot Loader	U-Boot boot loader				
Operating Systems	Linux, Yocto Project Android				
Power Consumption	Low power Cortex-A55 / Cortex-M33 / Cortex-M7 typ. application 3-8W @ 5V				
Temperature Range	Operating:	commercial variants:	0 to +60°C		
		industrial variants:	-40°C to +85°C		
	Storage:	commercial variants:	-20°C to +80°C		
		industrial variants:	-40°C to +85°C		
Humidity	Operating:	10% to 85% r. H. non cond.			
	Storage:	5% to 85% r. H. non cond.			
Size	82 x 50 mm (3,23" x 1,97")				

conga-SMX95 | Block Diagram

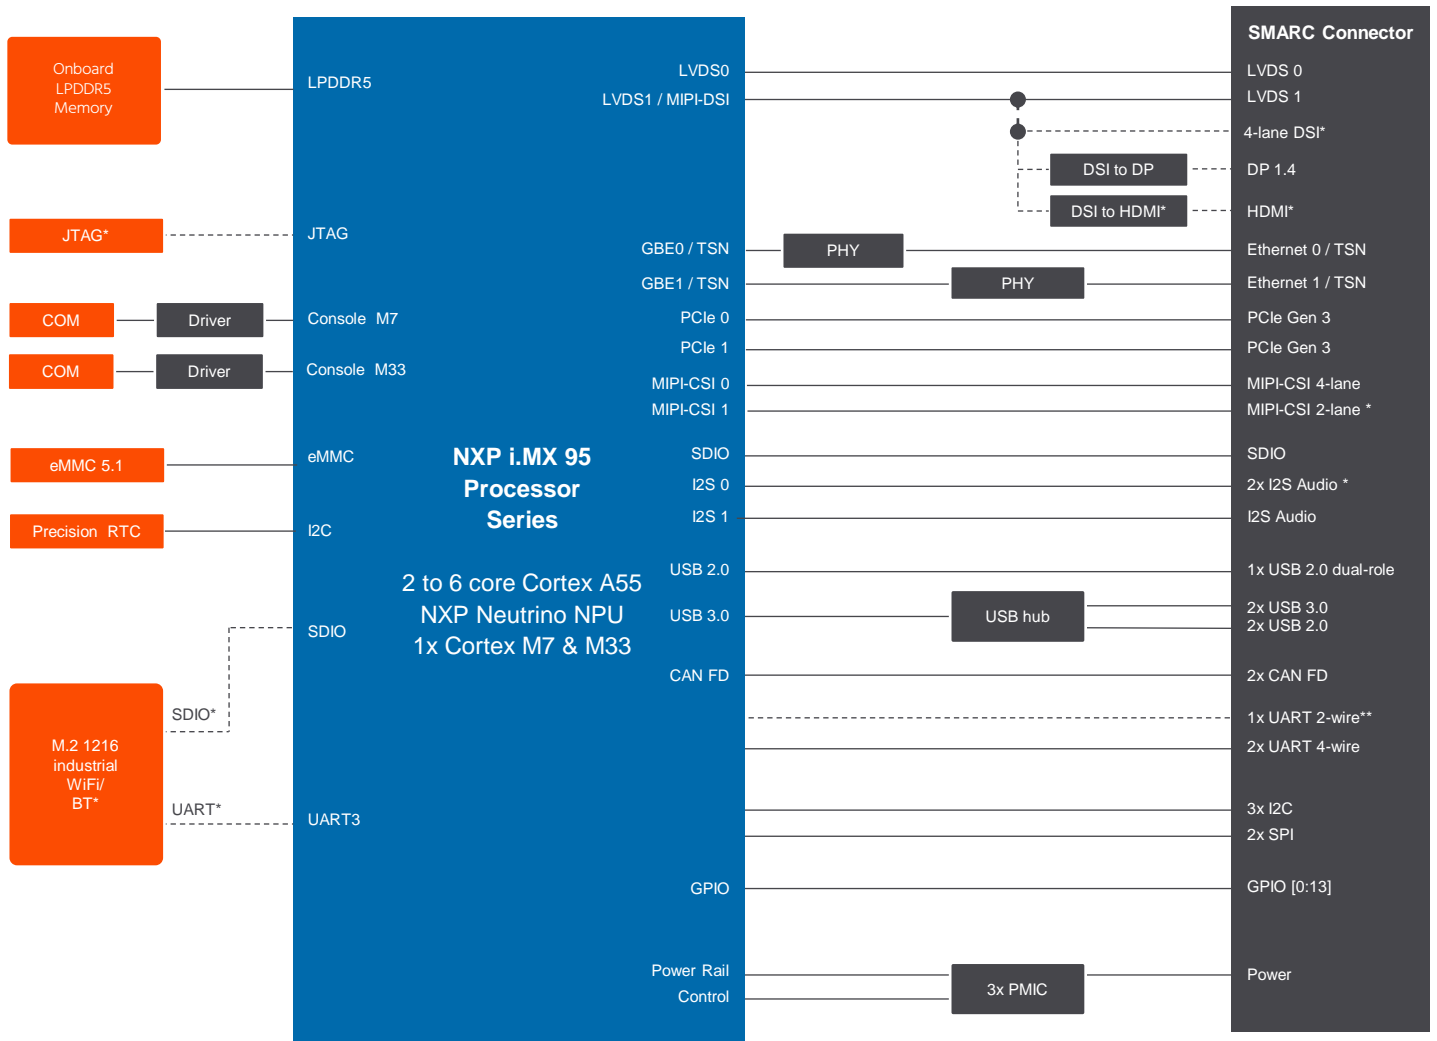

* Assembly Option
 ** Shared with Console

conga-SMX95 | Order Information

Article	PN	Description
conga-SMX95/MX959-6C-8G-eMMC64	051600	SMARC Module with NXP i.MX 9596 6-core processor. Features 6x ARM Cortex-A55 @ 2 GHz, ARM Cortex-M7, ARM Cortex-M33, eIQ Neutron NPU, 8GB onboard LPDDR5 memory and 64GB onboard eMMC. Commercial grade temperature range from 0°C to 60°C.
conga-SMX95/MX959-6C-4G eMMC32	051601	SMARC Module with NXP i.MX 9596 6-core processor. Features 6x ARM Cortex-A55 @ 1.8 GHz, ARM Cortex-M7, ARM Cortex-M33, eIQ Neutron NPU, 4GB onboard LPDDR5 memory and 32GB onboard eMMC. Commercial grade temperature range from 0°C to 60°C.
conga-SMX95/i-MX959-6C-8G eMMC64	051610	SMARC Module with NXP i.MX 9596 6-core processor. Features 6x ARM Cortex-A55 @ 1.8 GHz, ARM Cortex-M7, ARM Cortex-M7, eIQ Neutron NPU, 8GB onboard LPDDR5 memory and 64GB onboard eMMC. Industrial grade temperature range from -40°C to 85°C.
conga-SMX95/i-MX959-6C-4G eMMC32	051611	SMARC Module with NXP i.MX 9596 6-core processor. Features 6x ARM Cortex-A55 @ 1.8 GHz, ARM Cortex-M7, ARM Cortex-M33, eIQ Neutron NPU, 4GB onboard LPDDR5 memory and 32GB onboard eMMC. Industrial grade temperature range from -40°C to 85°C.
conga-SMX95/i-MX959-6C-8G eMMC64 NX611	051620	SMARC Module with NXP i.MX 9596 6-core processor. Features 6x ARM Cortex-A55 @ 1.8 GHz, ARM Cortex-M7, ARM Cortex-M33, eIQ Neutron NPU, 8GB onboard LPDDR5 memory and 64GB onboard eMMC. Industrial grade temperature range from -40°C to 85°C. With Wifi 6 / BT 5.3 module NX611.
conga-SMX95/CSP-B	051350	Passive cooling solution for SMARC module conga-SMX95 with NXP i.MX 95 ARM processor. All standoffs are with 2.7mm bore hole.
conga-SMX95/HSP-B	051351	Heat spreader solution for SMARC module conga-SMX95 with NXP i.MX 95 ARM processor. All standoffs are with 2.7mm bore hole.
SMARC/CSA Adapter	050060	Active cooling solution adapter for SMARC modules used in combination with module heat spreader.
conga-SEVAL	007010	Evaluation carrier board for SMARC modules.
conga-SMC1/SMARC-ARM	020750	3.5" carrier board for congatec SMARC modules based on NXP i.MX ARM architecture.



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33
info@alcom.be | www.alcom.be
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands
Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

© 2024 congatec GmbH.
All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec GmbH. Draft Rev. 0.3, June 24, 2024



www.congatec.com