



SINGLE BOARD  
COMPUTER



# DIGI CONNECTCORE 6+ SBC

NXP i.MX6Plus based solution with scalable, quad-core performance and integrated wireless connectivity

Digi ConnectCore® 6+ SBC is an ultra-compact and versatile off-the-shelf single board computer (SBC). It offers significantly reduced time to market by virtually eliminating the traditional risk, effort and complexity of custom board designs without sacrificing flexibility or capabilities.


Built on the Digi ConnectCore 6+ module, it provides a common platform with scalable NXP i.MX6Plus performance, pre-certified Bluetooth® 5 and Wi-Fi integration, Digi XBee® RF module and cellular connectivity options, Gigabit Ethernet support, multi display/camera and audio support, external storage, expansion connectors and reliability in harsh environments.

Leading and innovative features such as the Digi Microcontroller Assist™ (MCA) enable the development of connected products with highly optimized power footprints. Optional Digi Remote Manager® integration provides secure remote management and device health capabilities for the Internet of Things.

## BENEFITS

- Compact off-the-shelf SBC
- Scalable capabilities and i.MX6Plus performance
- Gigabit Ethernet and pre-certified dual-band 802.11ac + Bluetooth 5
- Seamless cellular modem and Digi XBee® integration
- Complete set of available peripherals and interfaces with customization options
- Designed for flexibility and reliability
- Yocto Linux and Android software platform support
- Industrial operating temperature available

## BLOCK DIAGRAM

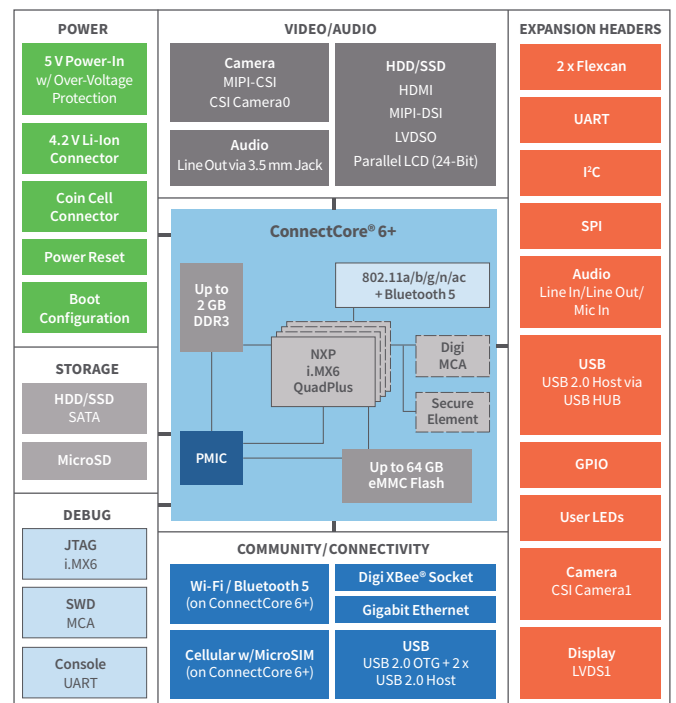

## RELATED PRODUCTS



ConnectCore®  
6+



ConnectCore®  
6UL SBC PRO



ConnectCore®  
6UL SBC Express



ConnectCore®  
8X SBC Pro



ConnectCore®  
8X

## SPECIFICATIONS

## Digi ConnectCore® 6+ SBC

<b>APPLICATION PROCESSOR</b>	NXP i.MX6Plus encompasses a dual or quad-core Arm® Cortex®-A9 platform running up to 1.0 GHz with 1 MB of L2 cache, and optimized 64-bit DDR3 or 2-ch., 32-bit LPDDR2 support. Integrated FlexCAN, MLB busses, PCI Express® and SATA-2 provide excellent connectivity
<b>MEMORY</b>	8 GB eMMC, 2 GB DDR (64-bit)
<b>PMIC</b>	Dialog DA9063
<b>GRAPHICS</b>	LVDS, MIPI display port, MIPI camera port and HDMI v1.4
<b>SECURITY</b>	RNG, TrustZone, Ciphers, Security Cntrl, Secure RTC, Secure JTAG, eFuses (OTP)
<b>PERIPHERALS/INTERFACES</b>	MMC 4.4/SD 3.0 x3MMC 4.4/SDXC, UART x5 (5 Mbps), MIPI HSI, S/PDIF Tx/Rx, I2C x3, SPI x5, ESAI, I2S/SSI x3, FlexCAN x2, MLB150 + DTCP, S-ATA and PHY (3 Gbps), USB2 OTG and PHY, USB 2.0 Host and PHY, USB 2.0 HSIC Host x2, PWM, 3.3V GPIO, Keypad, PCIe 2.0 (x1 lane), HDMI and PHY, MIPI DSI, MIPI CSI2, 20-bit CSI, 24-bit RGB, LVDS (x2), RTC, External address/data bus, Watchdog, Timers, JTAG
<b>EXTERNAL BUS</b>	26-bit address / up to 32-bit data (multiplexed and non-multiplexed modes)
<b>DISPLAYS</b>	1 x HDMI (Type A) 2 x LVDS with backlight control and I2C touch interface (HIROSE DF14A-20P-1.25H) 1 x Parallel LCD (24-bit) with backlight control and I2C touch interface (Omron XF2M-4015-1A) 1 x MIPI-DSI with backlight control and I2C touch interface (FCI SFW15S-2STE1LF, compatible with Raspberry Pi DSI)
<b>CAMERA</b>	1 x 8-Bit Parallel Camera Interface 1 (Omron XF2M-2015-1A) 1 x 8-Bit Parallel Camera Interface 0 (Molex 53047-1410) 1 x MIPI CSI-2 (FCI SFW15S-2STE1LF, compatible with Raspberry Pi CSI)
<b>USB 2.0</b>	2 x Ux USB OTG (Micro AB); 1 x USB Host (Molex 53047-0610)
<b>AUDIO</b>	1 x Line-In (3.5 mm stereo jack, CUI SJ1-3515-SMT) 1 x Line-In, 1 x Line-Out, 1 x Mic-In (Molex 53047-0810) On-board NXP SGTL5000 audio codec
<b>CONSOLE (RS-232)</b>	Yes
<b>SATA 3.0</b>	Yes
<b>MICRO-SIM</b>	Yes
<b>PCI EXPRESS MINI CARD</b>	Provides PCI Express x1, USB 2.0 Host, I2C, SIM, Reset, Wake-Up signals Supports mounting of half-size and full-size PCI Express Mini Cards
<b>BOOT CONFIGURATION</b>	eMMC / SD / SATA
<b>DIGI XBEE® SOCKET</b>	Yes
<b>WI-FI</b>	802.11a/b/g/n/ac
<b>BLUETOOTH</b>	Bluetooth® 5
<b>ON-MODULE MICROCONTROLLER</b>	Digi Microcontroller Assist (MKL14Z32VFT4)
<b>ANTENNA CONNECTORS</b>	1 x U.FL (on SOM)
<b>ETHERNET</b>	Gigabit Ethernet
<b>CAN BUS</b>	2 x FlexCAN (Molex 53047-0610)
<b>GPIO/I<sup>2</sup>C/SPI/UART</b>	1 x GPIO (8 x i.MX GPIOs + 4 MCA GPIOs - Molex 53047-1410) 1 x I <sup>2</sup> C (Molex 53047-0310), 1 x SPI (Molex 53047-0610) 3 x UART (4-wire TX/RX/RTS/CTS, 1 shared with Digi XBee® socket, Molex 53047-1410)
<b>DEBUG</b>	1 x JTAG for i.MX6 (FCI 20021111-00010T4LF) 1 x SWD for MCA (FCI 20021111-00010T4LF) Headers populated on development units only, Production units without header for plug of nails (Tag-Connect TC2050-IDC-NL)
<b>POWER BUTTON</b>	Power on, power off, sleep, wake-up
<b>RESET BUTTON</b>	Yes
<b>USER LEDS</b>	1 x Red, 1 x Yellow, 1 x Green
<b>COIN CELL CONNECTOR</b>	Yes
<b>SUPPLY VOLTAGE</b>	5 V @ 3.2 A (typical, depending on use-case)
<b>POWER SUPPLY CONNECTOR</b>	Main power supply via 2mm locking barrel connector
<b>OPERATING TEMPERATURE</b>	-40° C to 85° C (-40° F to 185° F)
<b>STORAGE TEMPERATURE</b>	-50° C to 125° C (-58° F to 257° F)
<b>RELATIVE HUMIDITY</b>	5% to 90% (non-condensing)
<b>RADIO APPROVALS</b>	US, Canada, EU, Australia/New Zealand
<b>EMISSIONS / IMMUNITY / SAFETY</b>	FCC Part 15 Class B, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, ICES-003 Class B, VCCI Class II, AS 3548, FCC Part 15 Subpart C Section 15.247, IC (Industry Canada), RSS-210 Issue 5 Section 6.2.2(o), EN 300 328, EN 301 489-17, EN 55024, EN 301 489-3, Safety UL/UR (or equivalent)
<b>DESIGN VERIFICATION</b>	Temperature: IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-78 Vibration/Shock: IEC 60068-2-6, IEC 60068-2-64, IEC 60068-2-27, HALT
<b>MECHANICAL DIMENSIONS</b>	LGA-400, 2 mm pitch, fully shielded (heat-spreading)

# CONNECTCORE® SBC SELECTION GUIDE

		ConnectCore 8X SBC Pro	ConnectCore 6UL SBC Express	ConnectCore 6UL SBC Pro	ConnectCore 6+ SBC	ConnectCore 6 SBC for i.MX6Quad	ConnectCore 6 SBC for i.MX6Dual
PERFORMANCE	Processor	NXP i.MX8X (Cortex-A35 / Cortex-M4F)	NXP i.MX6UL-2 (Cortex-A7)	NXP i.MX6UL-2 (Cortex-A7)	NXP i.MX6Quad (Cortex-A9)	NXP i.MX6Quad (Cortex-A9)	NXP i.MX6Dual (Cortex-A9)
	Clock Speed	1.2 GHz / 264 MHz	528 MHz	528 MHz	1.0 GHz	1.2 GHz	800 MHz
	Digi Microcontroller Assist	✓	✓	✓	✓	✓	-
MEMORY	Flash	16 GB eMMC	256 MB NAND (SLC)	256K/1GB NAND flash 4 GB eMMC <sup>1,7</sup>	8 GB eMMC <sup>1</sup>	4 GB eMMC <sup>1</sup>	4 GB eMMC <sup>1</sup>
	RAM	2 GB LPDDR4	256 MB DDR3	256K/1GB DDR3	2 GB DDR3	1 GB DDR3	1GB DDR3
NETWORKING	Ethernet	2 x Gigabit	1 x 10/100 Mbit	2 x 10/100 Mbit	1 x Gigabit	1 x Gigabit	1 x Gigabit
	Wi-Fi	802.11a/b/g/n/ac 2x2	802.11a/b/g/n/ac 1x1	802.11a/b/g/n/ac 1x1	802.11a/b/g/n/ac 1x1	802.11a/b/g/n/ac 1x1	802.11a/b/g/n/ac 1x1
	Bluetooth®	5	5	5	5	4.0	4.0
	Wi-Fi / Bluetooth Antenna	2 x On-board/U.FL	On-board/U.FL	U.FL/MMCX <sup>6</sup>	U.FL	U.FL	U.FL
	NFC Forum Type 2 Tag	-	-	✓	-	-	-
	NFC Antenna	-	-	External	-	-	-
Digi XBee® Socket	✓	-	✓	✓	✓	✓	
SECURITY	Digi TrustFence®	✓	✓	✓	✓	✓	✓
CELLULAR <sup>2</sup>	Micro SIM Card Slot	✓	-	✓	✓	✓	✓
COMMUNICATION	USB 2.0 / 3.0 Host	2 / 1	1 / -	3 / -	3 / -	3 / -	3 / -
	USB 2.0 OTG	2	1	1	1	1	1 / -
	PCI Express Mini Card 2.1	✓ (USB 2.0 Host/x1 PCIe)	-	✓ (USB 2.0 Host)	✓ (USB Host 2.0/x1 PCIe)	✓ (USB Host 2.0/x1 PCIe)	✓ (USB Host 2.0/x1 PCIe)
	RS-232/TTL	2/1	-/2 <sup>4</sup>	2/1	2/1	2/1	2/1
	Console	✓	✓ <sup>5</sup>	✓	✓	✓	✓
	I <sup>2</sup> C	✓	✓ <sup>4</sup>	✓	✓	✓	✓
	SPI	✓	✓ <sup>4</sup>	✓	✓	✓	✓
	GPIO	✓	✓ <sup>4</sup>	✓	✓	✓	✓
	Dual CAN	✓	-	✓	✓	✓	✓
	Grove	-	3	-	-	-	-
GRAPHICS	Expansion Connector <sup>4</sup>	-	✓ <sup>4</sup>	-	-	-	-
	2D/3D Hardware Acceleration (GPU)	✓	-	-	✓	✓	✓
	Hardware Video Encoding/Decoding	✓	-	-	✓	✓	✓
DISPLAY	Resolution	Up to 1920 x 1080	Up to 1366 x 768		Up to 2048 x 1536	Up to 1920 x 1080	
	HDMI	✓	-	-	✓	✓	✓
	LVDS <sup>3</sup>	2	-	1	2	2	1
	MIPI DSI <sup>3</sup>	✓	-	-	✓	✓	✓
CAMERA	RGB Parallel	24-bit	8-bit <sup>4</sup>	18-/24-bit	24-bit	24-bit	24-bit
	MIPI CSI	✓	-	-	✓	✓	✓
AUDIO	8-Bit Parallel	✓	-	✓	2	2	1
	Headphone Jack	✓	-	✓	✓	✓	✓
	Line-In / Line-Out / Microphone Header	✓	-	✓	✓	✓	✓
STORAGE	microSD	✓	✓	✓	✓	✓	✓
	SATA 3.0	-	-	-	✓	✓	-
OTHER	Power / Reset Buttons	✓	✓	✓	✓	✓	✓
	Power / Reset Header	✓	✓	✓	✓	✓	✓
	Coin Cell Battery Header	✓	✓	✓	✓	✓	✓
	Power / User LEDs	✓	✓	✓	✓	✓	✓
	Boot Configuration Switch	✓	Population Options	Population Options	✓	✓	✓
	JTAG (via Tag-Connect)	✓	✓	✓	✓	✓	✓
	SWD (via Tag-Connect)	✓	✓	✓	✓	✓	✓
ENVIRONMENTAL	Operating Temperature	-40° C to 85° C	-40° C to 85° C	-40° C to 85° C	-40° C to 85° C	-20° C to 70° C	-40° C to 85° C
MECHANICAL	Dimensions	100 x 72 mm	87 x 63 mm	100 x 72 mm			
	Form Factor	Pico-ITX	SBC	Pico-ITX			
DIGI SKUS		CC-SBP-WMX-JM8E	CC-SBE-WMX-JN58	CC-SBP-WMX-JN58	CC-SB-WMX-KK8D	CC-SB-WMX-J97C	CC-SB-WMX-L87C

1. pSLC mode option for industrial reliability
2. Via PCI Express Mini Card Connector or Digi XBee® Cellular
3. With Touch (I2C) + Backlight Control
4. Raspberry Pi HAT compatible header (and mounting holes)
5. USB Device via USB Type AB connector
6. On-board antenna switch configuration
7. Software-selectable: on-board eMMC or microSD

PART NUMBERS	DESCRIPTION
CC-SB-WMX-KK8D	Digi ConnectCore 6+ SBC, i.MX6QuadPlus, 1.0 Ghz, -40 to 85°C, 8 GB flash, 2 GB DDR3, 802.11a/b/g/n/ac, Bluetooth 5, Ethernet

FOR MORE INFORMATION  
PLEASE VISIT **DIGI.COM**



DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2020 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91004339  
A8/1020

DIGI INTERNATIONAL WORLDWIDE HQ  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

DIGI INTERNATIONAL GERMANY  
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

DIGI INTERNATIONAL SINGAPORE  
+65-6213-5380

DIGI INTERNATIONAL CHINA  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

