

Connect this device with  
Digi ConnectCore Cloud Services.  
Create. Configure. Deploy. Manage.


# DIGI CONNECTCORE 8M NANO

Embedded system-on-module based on the NXP i.MX 8M Nano processor;  
designed for longevity and scalability in industrial IoT applications

Digi ConnectCore® 8M Nano, based on the NXP® i.MX 8M Nano application processor, is an integrated system-on-module (SOM) platform. The Nano is designed for a wide range of industrial, medical, agricultural and transportation applications, including Internet of Things (IoT), human-machine interface (HMI), equipment monitoring, audio/voice, edge computing and machine learning (e.g. anomaly detection).

Digi ConnectCore 8M Nano features up to 4x power-efficient Arm® Cortex®-A53 cores and 1x Cortex-M7 core, which allow it to minimize power consumption while maintaining a high standard of performance. This SOM is designed for industrial reliability and the 10+ year product lifecycles of embedded devices. It helps OEMs lower their R&D and development costs and realize a lower total cost of ownership by leveraging pre-certified wireless connectivity, remote management, cloud integration and a complete Linux software platform based on Yocto Project®. In addition, built in Digi TrustFence® enables OEM developers to integrate critical security and data privacy capabilities into their products.

## BLOCK DIAGRAM

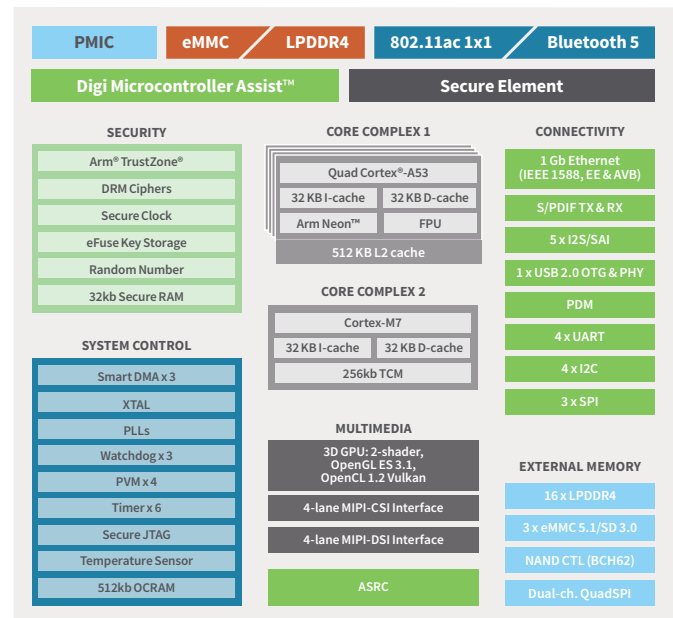

## BENEFITS

- Industrial i.MX 8M Nano single/quad-core system-on-module
- Digi SMTplus® form factor (40 mm x 45 mm) for ultimate reliability and design freedom
- Power management with both hardware and software support for low-power designs
- Display and camera capabilities with hardware acceleration
- Pre-certified dual-band 802.11a/b/g/n/ac 1x1 and Bluetooth® 5 connectivity
- Seamless cellular modem and Digi XBee® integration
- Cloud and edge-compute services integration
- Built-in device security, identity and privacy with Digi TrustFence®
- Remote management with Digi ConnectCore® Cloud Services
- Digi Embedded Yocto Linux® support




## RELATED PRODUCTS



ConnectCore  
8M Nano Dev Kit



ConnectCore  
8X



ConnectCore  
6UL



Digi XBee®  
Modules



ConnectCore  
8X SBC Pro Dev Kit



## SPECIFICATIONS

## DIGI CONNECTCORE 8M NANO

<b>APPLICATION PROCESSOR</b>	NXP® i.MX8 Nano <ul style="list-style-type: none"> <li>Up to 4x Cortex®-A53 cores at 1.4 GHz</li> <li>1x Cortex-M7 core at 600 MHz core for real-time processing</li> </ul>
<b>MEMORY</b>	Up to 8 GB eMMC, up to 1 GB of LPDDR4 (16-bit)
<b>PMIC</b>	NXP PCA9450A
<b>GRAPHICS</b>	Graphic Processing Unit: <ul style="list-style-type: none"> <li>GC7000UL with OpenCL and Vulkan support</li> <li>2 shader</li> <li>123 million triangles / sec</li> <li>0.8 giga pixel / sec</li> <li>12.8 GFLOPs 32-bit / 12.8 GFLOPs 16-bit</li> <li>Supports OpenGL ES 1.1, 2.0, 3.0, OpenCL</li> <li>Shader clock frequency of 500 MHz</li> </ul> LCDIF display controller, supporting up to 1080p 60fps display through MIPI DSI MIPI DSI (4-lane) with PHY (display interface) MIPI CSI (4-lane) with PHY (camera interface)
<b>SECURITY</b>	Digi TrustFence®, TRNG, TrustZone, Secure RTC, Secure JTAG, Secure Element
<b>PERIPHERALS/ INTERFACES</b>	1x USB 2.0 OTG controllers with integrated PHY interfaces 3x Ultra Secure Digital Host Controller (uSDHC) interfaces 4x Universal Asynchronous Receiver / Transmitter (UART) modules 4x I2C modules 3x SPI modules 1x Quad SPI 10x PWM channels 1x 16-bit ADC module with accurate internal voltage reference, up to 20 channels 5x Synchronous Audio Interface (SAI) modules supporting I2S, AC97, TDM, codec/DSP and DSD interfaces 1x S/PDIF input and output, including a raw capture input mode 8-channel Pulse Density Modulation (PDM) input Up to 112 GPIOs
<b>ETHERNET</b>	1x 10/100/1000M Ethernet + AVB
<b>WI-FI</b>	1x1 802.11a/b/g/n/ac dual-band wireless
<b>BLUETOOTH</b>	Bluetooth® 5
<b>ON-MODULE MICROCONTROLLER ASSIST</b>	Digi Microcontroller Assist™ <ul style="list-style-type: none"> <li>Independent Cortex-M0+ microcontroller subsystem</li> <li>Supporting ultra-low power modes at &lt;3 µA</li> </ul>
<b>OPERATING TEMPERATURE</b>	Industrial: -40 °C to 85 °C (-40 °F to 185 °F), depending on use case and enclosure/system design
<b>STORAGE TEMPERATURE</b>	-50 °C to 125 °C (-58 °F to 257 °F)
<b>RELATIVE HUMIDITY</b>	5% to 90% (non-condensing)
<b>RADIO APPROVALS</b>	US, Canada, EU, Japan, Australia/New Zealand
<b>EMISSIONS/ IMMUNITY/ SAFETY</b>	FCC Part 15 Class B, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, ICES- 003 Class B, VCCI Class II, AS 3548, FCC Part 15 Subpart C Section 15.247, IC (Industry Canada), RSS-210 Issue 5 Section 6.2.2(o), EN 300 328, EN 301 489-17, EN 55024, EN 301 489-3, Safety (IEC 62368-1)
<b>DESIGN VERIFICATION</b>	Temperature: IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-78 Vibration/shock: IEC 60068-2-6, IEC 60068-2-64, IEC 60068-2-27, HALT
<b>MECHANICAL DIMENSIONS</b>	118 castellated vias, LGA-474, 1.27 mm pitch, 40 mm x 45 mm x 3.5 mm (1.6 in x 1.8 in x 0.1 in)
<b>PRODUCT WARRANTY</b>	3-year

## PART NUMBERS

## DIGI CONNECTCORE 8M NANO DEVELOPMENT KITS

CC-WMX8MN-KIT	Digi ConnectCore 8M Nano development kit with development board, Quad Core, 8 GB eMMC, 1 GB LPDDR4 wireless
---------------	---

## PART NUMBERS

## DIGI CONNECTCORE 8M NANO SYSTEM-ON-MODULES

### DIGI CONNECTCORE 8M NANO WIRELESS SOMS

CC-WMX-FS7D-NN	Digi ConnectCore 8M Nano, Quad Core, 8 GB eMMC, 1 GB LPDDR4 wireless
CC-WMX-FR6D-NN	Digi ConnectCore 8M Nano, SoloLite Core, 8 GB eMMC, 512 MB LPDDR4 wireless

### DIGI CONNECTCORE 8M NANO ETHERNET SOMS

CC-MX-FS7D-ZN	Digi ConnectCore 8M Nano, Quad Core, 8 GB eMMC, 1 GB LPDDR4 Ethernet
CC-MX-FR6D-ZN	Digi ConnectCore 8M Nano, SoloLite Core, 8 GB eMMC, 512 MB LPDDR4 Ethernet

## PART NUMBERS

## DIGI CONNECTCORE 8M NANO ACCESSORIES

CC-ACC-LCDW-10	LCD application kit, including 10 in WXGA (1280x800) LCD panel with PCAP touch
----------------	--

## PART NUMBERS

## DIGI CONNECTCORE CLOUD SERVICES

CC-CS-ESS-1-1YR	Digi ConnectCore Cloud Services — Essential 1-year (1 device)
CC-CS-ESS-100-1YR	Digi ConnectCore Cloud Services — Essential 1-year (100 devices)
CC-CS-ESS-100-3YR	Digi ConnectCore Cloud Services — Essential 3-year (100 devices)
CC-CS-ESS-100-5YR	Digi ConnectCore Cloud Services — Essential 5-year (100 devices)
CC-CS-PRM-1-1YR	Digi ConnectCore Cloud Services — Premium 1-year (1 device)
CC-CS-PRM-100-1YR	Digi ConnectCore Cloud Services — Premium 1-year (100 devices)
CC-CS-PRM-100-3YR	Digi ConnectCore Cloud Services — Premium 3-year (100 devices)
CC-CS-PRM-100-5YR	Digi ConnectCore Cloud Services — Premium 5-year (100 devices)

## PART NUMBERS

## DIGI CONNECTCORE SECURITY SERVICES

CC-SEC-ESS	Digi ConnectCore Security Services — Essential 1-year
CC-SEC-PRM	Digi ConnectCore Security Services — Premium 1-year
CC-SEC-ENT	Digi ConnectCore Security Services — Enterprise 1-year
CC-SEC-ENT-ADD	Digi ConnectCore Security Services — Additional product (same duration as main contract)

## PART NUMBERS

## EXPERT SUPPORT

DG-EXPE-12	Expert 12x5 support for end users
DG-EXPE-24	Expert 24x7 support for end users

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 2023 Digi International Inc. All rights reserved.

All trademarks are the property of their respective owners.

DIGI INTERNATIONAL WORLDWIDE HQ  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

DIGI INTERNATIONAL JAPAN  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

DIGI INTERNATIONAL GERMANY  
+49-89-540-428-0

DIGI INTERNATIONAL SINGAPORE  
+65-6213-5380

DIGI INTERNATIONAL CHINA  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | [info@alcom.be](mailto:info@alcom.be) | [www.alcom.be](http://www.alcom.be)  
Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | [info@alcom.nl](mailto:info@alcom.nl) | [www.alcom.nl](http://www.alcom.nl)

91004417  
B5/323

