

# EPM6-2V

## 1 Watt isolated DC-DC converter



### Product features

- 1 Watt isolated DC-DC converter
- Input voltage: 5 Vdc, 12 Vdc, and 24 Vdc
- Efficiency up to 82%
- Isolation voltage 3 kVdc
- SIP7 package (4 and 5 pin)
- Operating ambient temperature from -40 °C to +100 °C
- No minimum load required
- IEC62368-1/ EN55032&35 certified


### Applications

- Computing/telecom
- Distributed power architectures
- Servers and workstations
- LAN / WAN applications
- Data processing applications
- Industrial IoT equipment, sensors
- Power supply, battery backup
- Wireless TX/RX modules
- Renewable energy products

### Environmental compliance



### Ordering part number

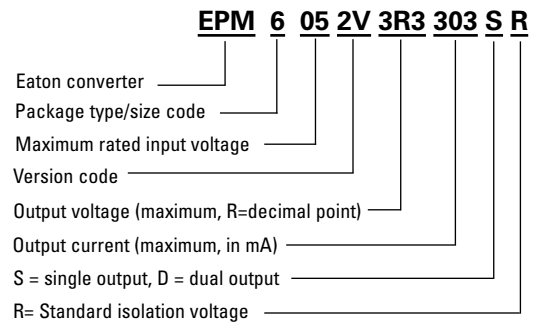

Powering Business Worldwide



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | [info@alcom.be](mailto:info@alcom.be) | [www.alcom.be](http://www.alcom.be)  
 Rivium 1e straat 52 | 2909 LE Capelle aan den IJssel | The Netherlands | Tel. +31 (0)10 288 25 00 | [info@alcom.nl](mailto:info@alcom.nl) | [www.alcom.nl](http://www.alcom.nl)

## Specifications

	Parameter	Conditions	Minimum	Typical	Maximum	Unit	
<b>Input</b>	Input filter			Internal capacitors			
	Input voltage range		-10		+10	%	
<b>Output</b>	Efficiency			Selection guide			
	Minimum load		0			%	
	Line regulation	LL-HL at 100% load		1.2% typ. @1% of Vin			
	Load regulation (10-100% Load)	Vout = 3.3 Vdc, 5 Vdc			15		%
		Vout = 12 Vdc, 15 Vdc			10		%
	Voltage accuracy		-5		+5		%
	Operating frequency	100% Load at Nominal Vin	50				kHz
Ripple & noise <sup>1</sup>				100		mVp-p	
<b>Environment</b>	Operating temperature (with derating)		-40		+100	°C	
	Storage temperature		-55		+125	°C	
	Relative humidity		5		95	%RH	
	Vibration			MIL-STD-202G			
<b>Function</b>	Isolation voltage 1 min., Input to Output		3			kVdc	
	Isolation resistance		10			GΩ	
	Isolation capacitance			80		pF	
	MTBF (MIL-HDBK-217F)	+25 °C			17,100		khours
		+85 °C			10,400		khours
Certification				IEC62368-1/ EN55032&35			
<b>Physical</b>	Dimension			0.774 x 0.402 x 0.236 inch			
	Weight			2.8 g			
	Case material			UL94V-0 black plastic			
	Potting material			Epoxy (UL94V-0)			
<b>EMC</b>	EMI	EN 55032		Class A/B with external circuit			
	ESD	IEC 61000-4-2 Air ± 8 kV; Contact ± 6 kV		Criteria A			
	RS	IEC 61000-4-3, 3 V/m		Criteria A			
	EFT	IEC 61000-4-4, ± 0.5 kV		Criteria A			
	Surge	IEC 61000-4-5, ± 0.5 kV		Criteria A			
	CS	IEC 61000-4-6, 3 Vrms		Criteria A			
	PFMF	IEC 61000-4-8, 1 A/m		Criteria A			

1. The ripple & noise are measured with 0.1 µF capacitor at 20 MHz BW.

2. All specifications valid at nominal input, full load and +25 °C after warm-up time unless otherwise stated.


3. The product information and specifications are subject to change without prior notice.

**Selection guide**


Part number	Input voltage (Vdc)	Output voltage (Vdc)	Output current @ full load (mA)	Efficiency <sup>1</sup> minimum	Efficiency <sup>1</sup> typical	Capacitive load <sup>2</sup> maximum (μF)
EPM6052V-3R3-303SR	5	3.3	303	71%	74%	1500
EPM6052V-05R-200SR	5	5	200	76%	79%	1500
EPM6052V-12R-084SR	5	12	84	75%	78%	470
EPM6052V-15R-067SR	5	15	67	82%	85%	220
EPM6052V-3R3-152DR	5	±3.3	±152	72%	75%	±470
EPM6052V-05R-100DR	5	±5	±100	74%	77%	±470
EPM6052V-12R-042DR	5	±12	±42	77%	80%	±220
EPM6052V-15R-034DR	5	±15	±34	77%	80%	±220
EPM6122V-3R3-303SR	12	3.3	303	76%	79%	1500
EPM6122V-05R-200SR	12	5	200	79%	82%	1500
EPM6122V-12R-084SR	12	12	84	77%	80%	470
EPM6122V-15R-067SR	12	15	67	78%	81%	220
EPM6122V-3R3-152DR	12	±3.3	±152	77%	80%	±470
EPM6122V-05R-100DR	12	±5	±100	73%	76%	±470
EPM6122V-12R-042DR	12	±12	±42	77%	80%	±220
EPM6122V-15R-034DR	12	±15	±34	78%	81%	±220
EPM6242V-3R3-303SR	24	3.3	303	75%	78%	1500
EPM6242V-05R-200SR	24	5	200	76%	79%	1500
EPM6242V-12R-084SR	24	12	84	76%	79%	470
EPM6242V-15R-067SR	24	15	67	77%	80%	220
EPM6242V-3R3-152DR	24	±3.3	±152	73%	76%	±470
EPM6242V-05R-100DR	24	±5	±100	77%	80%	±470
EPM6242V-12R-042DR	24	±12	±42	77%	80%	±220
EPM6242V-15R-034DR	24	±15	±34	78%	81%	±220

1. Efficiency is nominal input voltage and full load @ +25 °C.
2. Capacitive load is tested at minimum input voltage and a constant resistive load.
3. All specifications valid at nominal input voltage, full load and +25 °C after warm-up time unless otherwise stated.

**Derating curve**

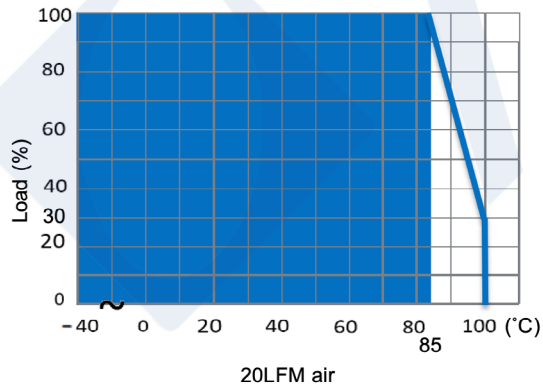


**Measure method**

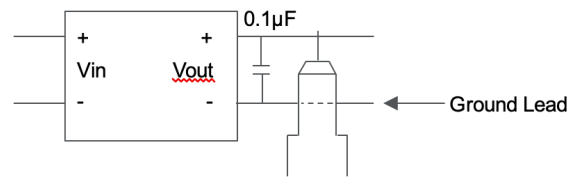


EMC filtering circuit

Single

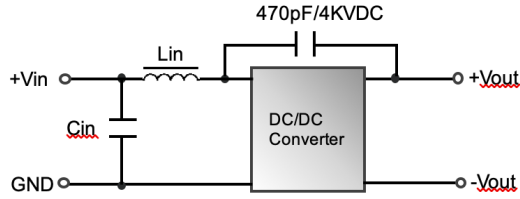


Class	5 Vin	12 Vin	24 Vin
Class A	47 $\mu$ H/ 2.2 $\mu$ F	22 $\mu$ H/ 2.2 $\mu$ F	10 $\mu$ H/ 2.2 $\mu$ F
Class B	47 $\mu$ H/ 10 $\mu$ F	22 $\mu$ H/ 4.7 $\mu$ F	22 $\mu$ H/ 4.7 $\mu$ F

Dual

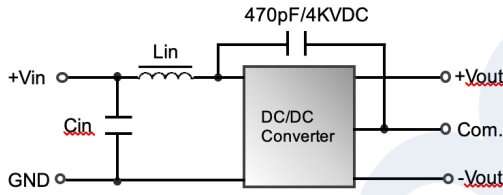

Class	5 Vin	12 Vin	24 Vin
Class A	22 $\mu$ H/ 2.2 $\mu$ F	22 $\mu$ H/ 2.2 $\mu$ F	10 $\mu$ H/ 2.2 $\mu$ F
Class B	100 $\mu$ H/ 4.7 $\mu$ F	22 $\mu$ H/ 4.7 $\mu$ F	47 $\mu$ H/ 2.2 $\mu$ F


Dimensions - inches

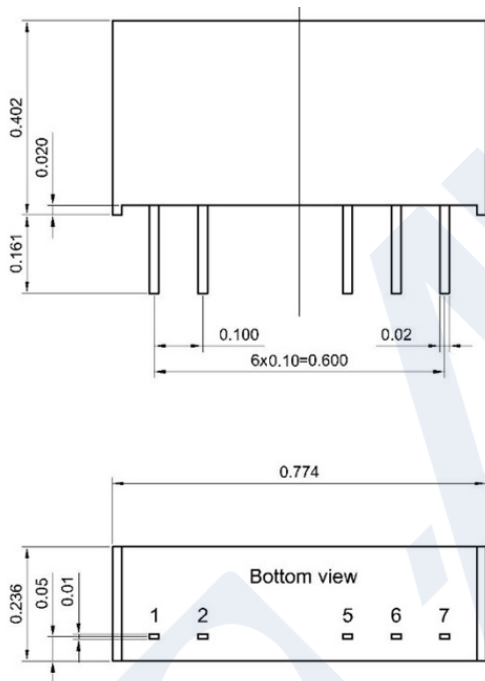


Projection: Third angle projection  
Unit: inch  
PIN tolerance:  $\pm 0.004$   
Tolerance: X.XX  $\pm 0.02$  X.XXX  $\pm 0.01$

Recommended PCB layout

Single

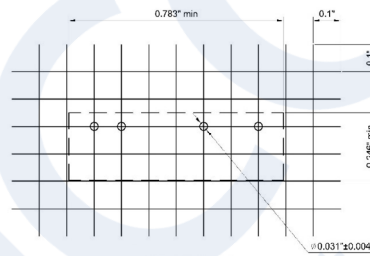

Dual

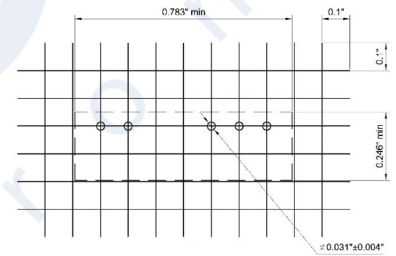



Marking



WLY = lot code

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

Packaging- Inches

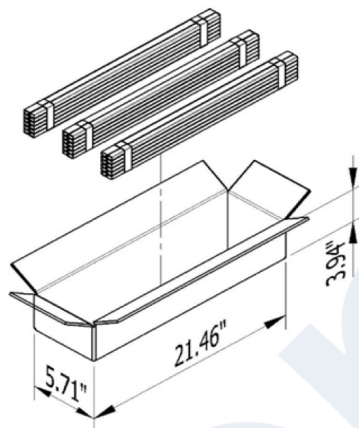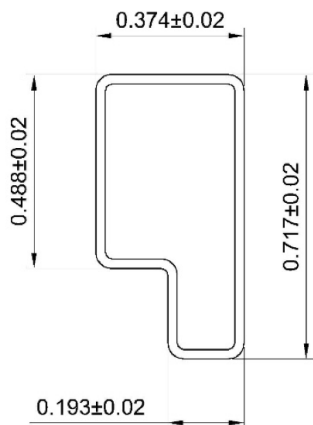

Unit: inch  
1 tube = 25 pieces  
Length:  $20.47 \pm 0.08$

Carton = 21.46\*5.71\*3.94 inch  
25 (pieces/tube)\*12(tube/bundle)\*3(bundle) = 900 pieces


## General information

### Storage and handling

The shelf life will be a minimum of 36 months, when stored at the following conditions: < +40 °C, < 90% RH.

### Wave solder profile

The wave solder profile is measured based on lead temperature. The recommended PCB pre-heat temperature is +80 °C to +100 °C, and the preheat rate of 1.5 to 2.5 °C/sec. The underside PCB temperature at the last pre-heat zone should be approximately +150 °C. The internal temperature of the solder parts should not exceed +210 °C. The duration of solder dwell time should be between 3 to 5 seconds, and not to exceed 10 seconds at a temperature of +260 °C maximum.

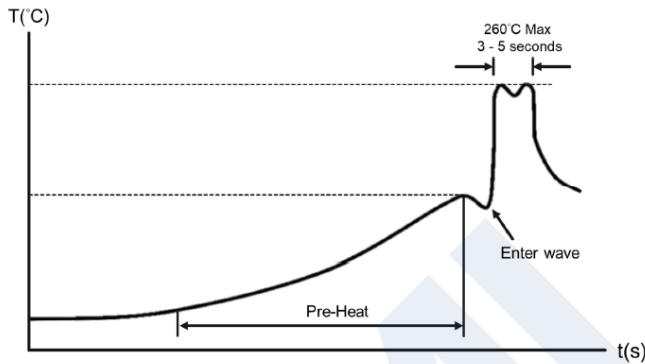

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
[www.eaton.com/electronics](http://www.eaton.com/electronics)

© 2022 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. ELX1163 BU-ELX22022  
March 2022

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

