


# PE-2004MX (M12)

Intel® I210 4-port X-coded M12 GigE IEEE 802.3at PoE+ Expansion Card, PCI Express x4, -25°C to 70°C

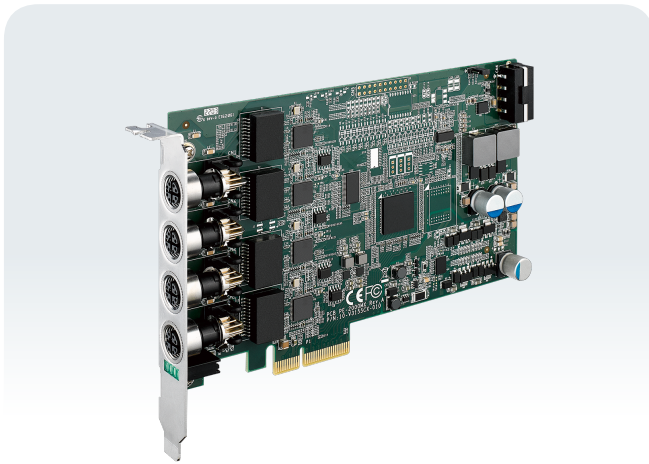

## Features


- Meets the standard PCIe card width (14.5mm)
- Intel® I210 1GBASE-T Ethernet Controller support 4 independent GigE LAN, up to 1Gbps data rate
- PCI Express x4 interface
- IEEE 802.3at Power over Ethernet (PoE+), rugged X-coded M12 connectors, up to 25.5W Power Output at 48V DC per port, with PoE+ On/Off Control
- Enhanced Transmission Selection (draft IEEE 802.1Qaz) Priority Flow Control (draft IEEE 802.1Qbb)
- Up to 9728 bytes Jumbo Frame, Supports PXE
- Support Intel® Virtualization Technology (VT)
- 25°C to 70°C Operating Temperature



## Specifications

Ethernet	
Power Requirement	PCI Express x4
LAN Controller	Intel® Ethernet Controller I210
LAN Controller Qty	4
Data Rate	1Gbps/ 100 /10 Mbps
Number of Port	4
Jumbo Frame	Up to 9728 bytes
Connector	8-pin X-coded M12 Connector
PoE Standard	IEEE 802.3at compliant
Power Requirement	
Output	<ul style="list-style-type: none"> <li>Up to 25.5W Power Output @48V DC per port</li> <li>4 LED for PoE On/Off Mode</li> </ul>
Power Connector	1 4-pin 12V Power Connector

Software Support	
OS	Windows 10, Linux
Mechanical	
Dimensions (W x L)	168mm x 111mm (6.6" x 4.4")
Bracket	Full height
Environment	
Operating Temperature	-25°C to 70°C (-13°F to 158°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @ 70°C
EMC	CE, FCC

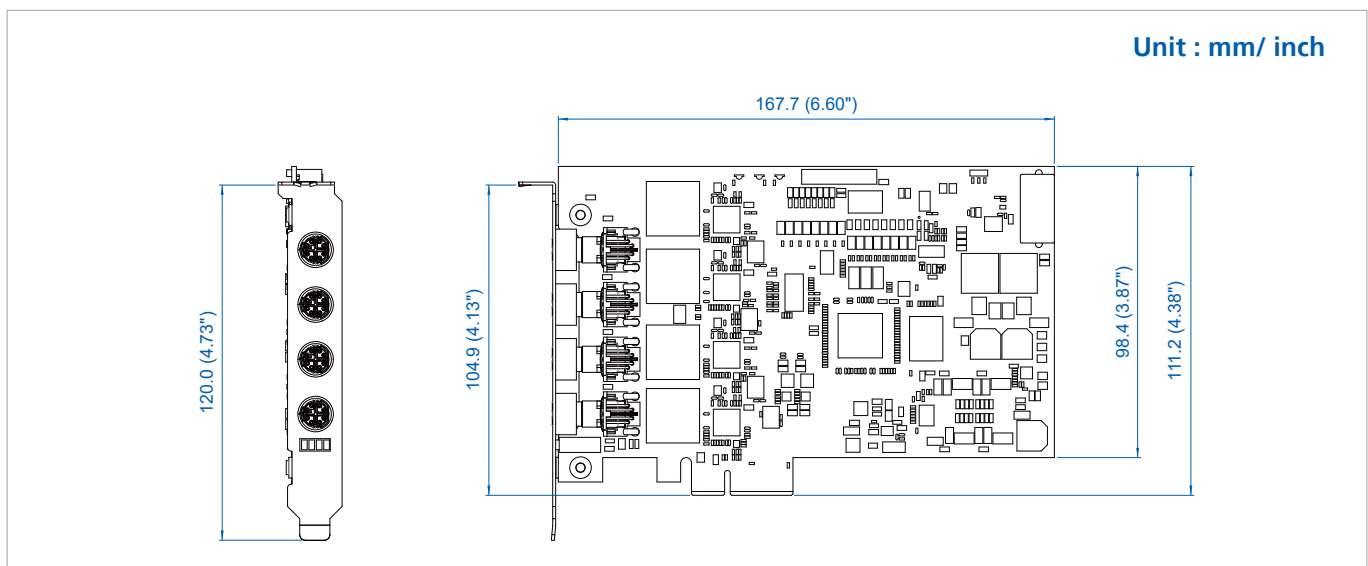

## Order Information

PE-2004MX	4-port GigE PoE+ M12 X-coded LAN Card with Intel® I210 Controllers
-----------	--