


Size	Resolution	LCD type	BL Luminance	Operation Temp
Vehicle Cluster				
7"	1024 x 600	IPS	1000	-30°C~80°C
10.1"	1920 x 1200	IPS	1000	-30°C~80°C
10.25"	1280 x 480	IPS	800	-30°C~85°C
12.3"	1920 x 720	IPS	1000	-30°C~80°C
Meter Gauge				
2.1"	320 x 320	MVA	480	-20°C~70°C
3"	432 x 432	IPS	1000	-30°C~85°C
3.4"	800 x 800	IPS	1000	-30°C~85°C
4.2"	720 x 720	IPS	1000	-30°C~85°C

Round TFT DISPLAY

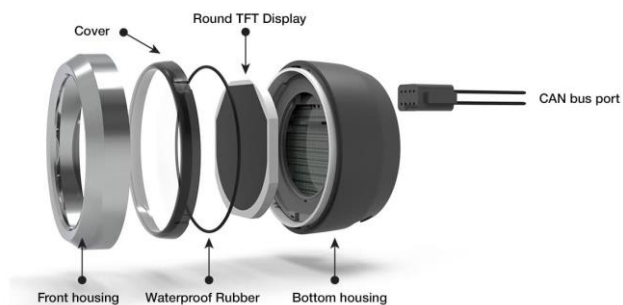

Display	2.1" TFT LCD	2.47" TFT LCD	3" TFT LCD	4.2" TFT LCD
Resolution	320(H) x (R,G,B) x 320(V)	480(H) x (R,G,B) x 480(V)	432(H) x (R,G,B) x 432(V)	720(H) x (R,G,B) x 720(V)
LCD type	MVA	IPS	IPS	IPS
Brightness	480	400	1000	1000
Operation Temperature	-20 ~ +70 °C	-20 ~ +70°C	-30 ~ +85 °C	-30 ~ +85 °C

Display	2.1" TFT LCD	2.47" TFT LCD	3" TFT LCD	4.2" TFT LCD
Interface	MIPI or RGB	MIPI	TTL	TTL
Touch	N/A	N/A	PCAP	PCAP

Meter Gauge

Display	3" TFT LCD	4.2" TFT LCD
Resolution	432(H) x (R,G,B) x 432(V)	720(H) x (R,G,B) x 720(V)
LCD type	IPS	IPS
Brightness	1000	1000
Operation Temperature	-30 ~ +85 °C	-30 ~ +85 °C
Interface	TTL	TTL
Touch	PCAP	PCAP

Vehicle Cluster

Display	7" TFT LCD	5" TFT LCD
Resolution	1024(H) x (R,G,B) x 600(V)	800(H) x (R,G,B) x 480(V)
LCD type	IPS	IPS
Brightness	1000	1000
Operation Temperature	-30 ~ +85 °C	-20 ~ +70 °C
Interface	TTL	TTL
Touch	PCAP	PCAP