



# DIGI XBEE<sup>3</sup> ZIGBEE 3.0

Easy-to-add connectivity in a compact, low-power, low-profile footprint.

Digi XBee3™ modules accelerate time to market for designers, OEMs and solution providers by quickly enabling wireless connectivity and easy-to-add functionality. Building on industry-leading technology, pre-certified Digi XBee3 modules offer the flexibility to switch between multiple frequencies and wireless protocols as needed.

Digi XBee3 ZigBee 3.0 offers a fully interoperable ecosystem covering all vertical markets including building automation, smart energy, digital health, intelligent lighting, and others.

With Digi Remote Manager®, Digi XBee3 modules can be easily configured and controlled from a simple, central platform. Built-in Digi TrustFence® security, identity and data privacy

features use more than 175 controls to protect against new and evolving cyber threats. MicroPython and XCTU software tools simplify adding functionality, configuration and testing.

From edge computing to future migration, Digi XBee modules offer size, weight, power and performance advantages ideal for scalable device connectivity. A versatile addition to the expanding Digi XBee Ecosystem of wireless modules, adapters and software, the Digi XBee3 Series is engineered to accelerate development and deployment.

## SIZE AND FLEXIBILITY

- At 13 mm x 19 mm, the new Digi XBee3 micro form factor allows for more compact and portable applications
- Digi XBee3 is one module for all protocols including: ZigBee, 802.15.4, DigiMesh and BLE, all configurable via Digi XCTU

## PROGRAMMABILITY

- Eliminate the need for an external microcontroller and create smart end nodes and low-end gateways using MicroPython

## SECURITY

- Intrinsic IoT security with Digi TrustFence®, a layered approach securing the edge device, through the gateway, into and out of the IoT

## RELATED PRODUCTS AND SERVICES



Development Kits


Digi XCTU

Digi TrustFence®

Digi Remote Manager®

Digi Design Services

## APPLICATION EXAMPLE

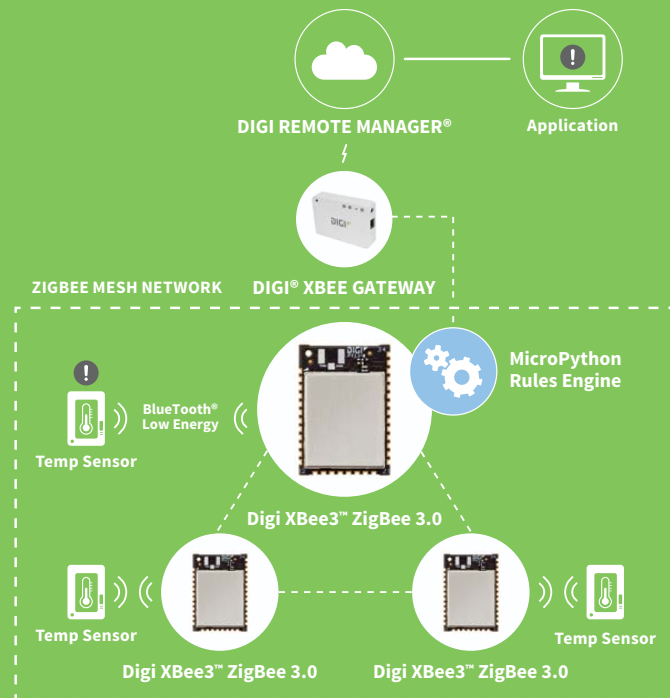

## SPECIFICATIONS

## Digi XBee3™ ZigBee 3.0

## Digi XBee3™ PRO ZigBee 3.0

## PERFORMANCE

TRANSCEIVER CHIPSET	Silicon Labs EFR32MG SoC	
DATA RATE	RF 250 Kbps, Serial up to 1 Mbps	
INDOOR/URBAN RANGE	200 ft (60 m)	300 ft (90 m)
OUTDOOR/RF LINE-OF-SIGHT RANGE	4000 ft (1200 m)	2 miles (3200 m)
TRANSMIT POWER	+8 dBm	+19 dBm
RECEIVER SENSITIVITY (1% PER)	-103 dBm Normal Mode	

## FEATURES

SERIAL DATA INTERFACE	UART, SPI, I <sup>2</sup> C
CONFIGURATION METHOD	API or AT commands, local or over-the-air (OTA)
FREQUENCY BAND	ISM 2.4 GHz
FORM FACTOR	Micro, Through-Hole, Surface Mount
INTERFERENCE IMMUNITY	DSSS (Direct Sequence Spread Spectrum)
ADC INPUTS	(4) 10-bit ADC inputs
DIGITAL I/O	15
ANTENNA OPTIONS	Through-Hole: PCB Antenna, U.FL Connector, RPSMA Connector SMT: RF Pad, PCB Antenna, or U.FL Connector Micro: U.FL Antenna, RF Pad, Chip Antenna
OPERATING TEMPERATURE	-40° C to +85° C
DIMENSIONS (L X W X H)	Through-Hole: 0.960 x 1.087 in (2.438 x 2.761 cm) SMT: 0.866 x 1.33 x 0.120 in (2.199 x 3.4 x 0.305 cm) Micro: 0.533 x 0.76 x 0.087 in (13 x 19 x 2 mm)

## PROGRAMMABILITY

MEMORY	1 MB / 128 KB RAM
CPU/CLOCK SPEED	HCS08 / up to 50.33 MHz

## NETWORKING AND SECURITY

PROTOCOL	ZigBee® 3.0
ENCRYPTION	128/256 bit AES
RELIABLE PACKET DELIVERY	Retries/Acknowledgements
IDS	PAN ID and addresses, cluster IDs and endpoints (optional)
CHANNELS	16 channels

## POWER REQUIREMENTS

SUPPLY VOLTAGE	2.1 to 3.6V	
TRANSMIT CURRENT	40 mA @ 8 dBm	135 mA @ 19 dBm
RECEIVE CURRENT	15 mA	
POWER-DOWN CURRENT	1.7 micro Amp @ 25 degrees C	

## REGULATORY APPROVALS

FCC, IC (NORTH AMERICA)	Yes	Yes
ETSI (EUROPE)	Yes	No

PART NUMBERS	DESCRIPTION
XB3-24Z8RM-J	Digi XBee3 ZigBee 3.0, 2.4 GHz, Micro, RF Pad Ant, MMT
XB3-24Z8UM-J	Digi XBee3 ZigBee 3.0, 2.4 GHz, Micro, U.FL Ant, MMT
XB3-24Z8CM-J	Digi XBee3 ZigBee 3.0, 2.4 GHz, Micro, Chip Ant, MMT
XB3-24Z8RM	Digi XBee3 PRO ZigBee 3.0, 2.4 GHz, Micro, RF Pad Ant, MMT
XB3-24Z8UM	Digi XBee3 PRO ZigBee 3.0, 2.4 GHz, Micro, U.FL Ant, MMT
XB3-24Z8CM	Digi XBee3 PRO ZigBee 3.0, 2.4 GHz, Micro, Chip Ant, MMT
XB3-24Z8ST-J	Digi XBee3, 2.4 Ghz ZB 3.0, SMA Ant, TH MT
XB3-24Z8UT-J	Digi XBee3, 2.4 Ghz ZB 3.0, U.FL Ant, TH MT
XB3-24Z8PT-J	Digi XBee3, 2.4 Ghz ZB 3.0, PCB Ant, TH MT
XB3-24Z8ST	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, SMA Ant, TH MT
XB3-24Z8UT	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, U.FL Ant, TH MT
XB3-24Z8PT	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, PCB Ant, TH MT
XB3-24Z8RS-J	Digi XBee3, 2.4 Ghz ZB 3.0, RF Pad Ant, SMT
XB3-24Z8US-J	Digi XBee3, 2.4 Ghz ZB 3.0, U.FL Ant, SMT
XB3-24Z8PS-J	Digi XBee3, 2.4 Ghz ZB 3.0, PCB Ant, SMT
XB3-24Z8RS	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, RF Pad Ant, SMT
XB3-24Z8US	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, U.FL Ant, SMT
XB3-24Z8PS	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, PCB Ant, SMT

## PRODUCT DIMENSIONS



### DIGI XBEE3 MICRO

