




# Flat Cable ( Ribbon Cable )

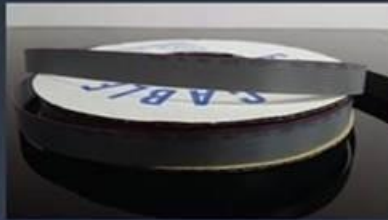

## < Specification

### UL Flat Ribbon Wire

UL Style	2651
Rated Temp.	105°C
Rated Voltage	300(V)

### Conductor


Size	28 (AWG)
No. of Strands	7/0.120mm Tin Copper

### Insulation

Material	PVC Gray (RoHS)
----------	-----------------

## Electronic

Spark Test	2500(V)
Dielectric Strength Test:	Min. 2000V in 1 minute
Conductor Resistance:	Max. 237Ω/KM
Insulation Resistance:	Max. 100MΩ/KM

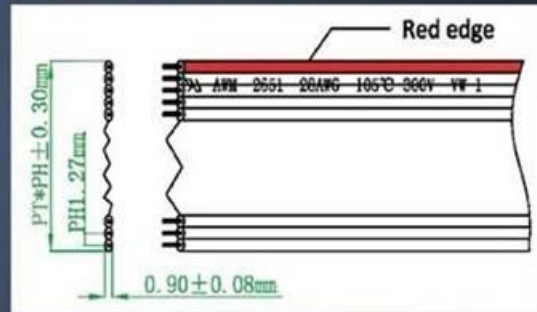

## < Order Information

### Flat Cable

	Pitch	AWG	Pin Count	
UL2678	0.635mm	30AWG	6~68P	MOQ: 1,000Feet
UL2651	1.0mm	28AWG	2~50P	
UL2651	1.27mm	28AWG	2~64P	
UL2651	2.0mm	26AWG	2~17P	MOQ: 10,000Feet
UL2651	2.54mm	24AWG	8P	MOQ: 10,000Feet

( If you need others AWG of flat, please check with our sales. )

### Rainbow Flat Cable

	Pitch	AWG	Pin Count	
UL2651	1.0mm	28AWG	10~50P	MOQ: 300Feet
UL2651	1.27mm	28AWG	9~64P	MOQ: 300Feet

### Packing Method

100 Feet / Roll	250 Feet / Roll	500 Feet / Roll
-----------------	-----------------	-----------------



### P/N: FCXXX-XXP XXX- L

Pitch	Code	ROHS+PVC	Feet / Roll	No. of Contacts
0.635mm	635			
1.0mm	100			
1.27mm	127			
2.0mm	200			
2.54mm	254			