

Compact Industrial LTE Router

InRouter305

· 4G

· Wi-Fi


Security

· Cloud-Managed

· Rich Industrial Interfaces



The IR305 is an IoT cellular router that integrates 4G LTE, Wi-Fi, and VPN technologies to provide easy, reliable, and secure Internet connectivity. With features such as 4G wireless wide area network and Wi-Fi wireless local area network, it offers uninterrupted access to multiple networks. With comprehensive security and intelligent software services, it enables efficient and secure networking, providing enterprises with safe and reliable data links for digital networking.

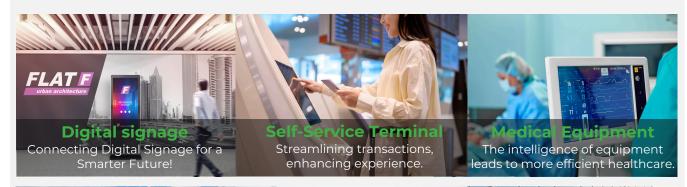







Features and Advantages

Diverse access methods covering all scenarios

IR305 has the capability to access the Internet through cellular, wired, and Wi-Fi connections, catering to different network environments. It provides differentiated cellular network services based on varying business requirements.



• "Always-on" connectivity

The IR305 comes with 4G/wired/Wi-Fi backup, cellular link failover, dual SIM switching, VRRP, multi-layer detection mechanism, and other features, providing a reliable and robust connection to ensure your network stability and reliability.



Secure Network Connection

The IR305 is equipped with firewall policies, access control, built-in VPN, data encryption, enhanced Wi-Fi security, and other features, effectively ensuring the security of the network.



Device Manager-Cloud management

The IR305 connects to the InHand Device Manager remote device management cloud platform to manage tens of thousands of distributed site devices in real time and grasp device status anytime and anywhere, making management more economical and more efficient!









Take control

Real-time monitoring

Critical Status

Dimensions (mm)

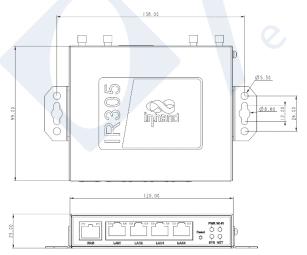



Industr	rial Tern	ninal				
IR305						
СОМ	DIO4	DIO3	D1O2	DIO1	V+	V-
IO				'	Power supply	
IR305-	s					
GND	TXD	RXD	В	A	V+	V-
RS232			RS485		Power supply	

Dimensions: 120*99*25 (mm)



Product Specifications

InRouter305 Hardwa	are Specifications							
Hardware Platform								
CPU	580MHz							
RAM								
FLASH	128MB DDR2 64MB SPI							
Interfaces								
interraces	END/00Mbps fact Feb							
Ethernet Port	5*10/100Mbps fast Ethernet port, RJ45, WAN/LAN/VLAN port, 1.5KV network isolation transformer protection							
Power Supply	DC9-36V, over-current protection, anti-reverse connection, 2 PIN industrial terminal							
IO. (Optional)	Support 4*IO (DO or IO can be configured)							
Serial port (*Optional)	1*RS232 + 1*RS485							
*Alternatives for I/O o	or I/O or Serial port							
Reset	Pinhole reset button							
SIM Card	Drawer-type slot*1, su	pport dual-NANO SIM						
Wi-Fi (Optional)	IEEE 802.11b/g/n, 300	Mbps						
GNSS (Optional)		SS /BeiDou /Galileo/ Qz is 2.5 meter	ZSS					
Antenna Connector	Positioning accuracy is 2.5 meter 4G: SMA x 1; Wi-Fi: RP-SMA x 2; GPS(Optional): SMA x 1 Note* North America models: 2 x SMA 4G antenna connectors GPS models: 1 x RP-SMA Wi-Fi antenna connector, 1 x SMA GPS antenna connector							
Ground Terminal	Supports							
Mechanical Specs								
Dimensions	120x99x25mm	Weight	354g					
Installation	Panel mounting, rail mounting	Protection Rating	IP30					
Housing	Metal	Cooling	Fanless					
Power rate								
Standby power	120mA-200mA@12V							
Working power	150mA-320mA@12V							
Peak power	320mA@12V							
Peak power Wi-Fi Transmit Powe	-							
	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dB							
Wi-Fi Transmit Powe	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dB 802.11n@2.4GHz:16dB	m(54Mbps) 3m +/-2dBm(HT20MCS)						
Wi-Fi Transmit Powe Transmit Power	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dB 802.11n@2.4GHz:16dB	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS'						
Wi-Fi Transmit Power Transmit Power Ambient Environment	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS'	7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dB 802.11n@2.4GHz:16dB nt	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS' Im -/-2dBm(HT40MCS'	7)					
Wi-Fi Transmit Power Transmit Power Ambient Environmer Storage Temperature Ambient Humidity	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dB 802.11n@2.4GHz:16dB nt	m(54Mbps) Sm +/-2dBm(HT20MCS' Sm +/-2dBm(HT40MCS' Operating Temperature -2(7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE nt -40~85°C	m(54Mbps) Sm +/-2dBm(HT20MCS' Sm +/-2dBm(HT40MCS' Operating Temperature -2(7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE nt -40~85°C 5~95% (no condensin	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS' Operating Temperature -20 g)	7)					
Wi-Fi Transmit Power Transmit Power Ambient Environmer Storage Temperature Ambient Humidity Indicator LED EMC Static	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE nt -40 ~ 85°C 5~95% (no condensin	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Operating Temperature -20 g) r, Wi-Fi vel 3	7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Fie	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE nt -40 ~ 85°C 5~95% (no condensin Power, Status, Cellula EN61000-4-2, le	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT4	7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Fiel	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE nt -40 ~ 85°C 5~95% (no condensin Power, Status, Cellula EN61000-4-2, le EN61000-4-3, le EN61000-4-4, le	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS' Operating Temperature g) r, Wi-Fi vel 3 vel 3 vel 3	7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE nt -40 ~ 85°C 5~95% (no condensin Power, Status, Cellula EN61000-4-2, le EN61000-4-4, le EN61000-4-5, le	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS' Operating Temperature g) r, Wi-Fi vel 3 vel 3 vel 3	7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Fiel	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE nt -40 ~ 85°C 5~95% (no condensin Power, Status, Cellula EN61000-4-2, le EN61000-4-4, le EN61000-4-5, le	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS' Operating Temperature -20 Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbar	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 1-40 ~ 85°C 5~95% (no condensin Power, Status, Cellula EN61000-4-2, le EN61000-4-3, le EN61000-4-5, le EN61000-4-6, le	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT4	7)					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbar	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 40 ~ 85°C 5~95% (no condensin Power, Status, Cellula EN61000-4-2, le EN61000-4-4, le EN61000-4-5, le EN61000-4-6, le EN61000-4-6, le	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT4	7) >~70°C					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbar Immunity Shock Wave Resistan Power Frequency Magnetic Field	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 40 ~ 85°C 5~95% (no condensin Power, Status, Cellula EN61000-4-2, le EN61000-4-4, le EN61000-4-5, le EN61000-4-6, le EN61000-4-6, le	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT4	7) >~70°C					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbar Immunity Shock Wave Resistan Power Frequency Magnetic Field Resistance	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 40 ~ 85°C 5~95% (no condensin Power, Status, Cellula EN61000-4-2, le EN61000-4-4, le EN61000-4-5, le EN61000-4-6, le EN61000-4-6, le	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT4	7) >~70°C					
Wi-Fi Transmit Power Transmit Power Ambient Environment Storage Temperature Ambient Humidity Indicator LED EMC Static Radiation Electric Field Surge Conducted Disturbar Immunity Shock Wave Resistant Power Frequency Magnetic Field Resistance Physical Specs	802.11b:16dBm+/-2dB 802.11g:16dBm+/-2dB 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 802.11n@2.4GHz:16dE 1-40 ~ 85°C 5~95% (no condensin EN61000-4-2, le EN61000-4-3, le EN61000-4-4, le EN61000-4-6, le EN61000-4-6, le EN61000-4-12, le EN61000-4-6, le EN61000-4-12, le EN61000-4-8, he	m(54Mbps) Im +/-2dBm(HT20MCS' Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40MCS' Im +/-2dBm(HT40MCS') Im +/-2dBm(HT40	7) >>~70°C ∆/m (>level 2)					

InRouter305 Softwar	e Specifications		
Network Connection			
Network Access	APN, VPDN		
Access Authentication	СНАР/РАР		
Network Type	GSM/GPRS/EDGE, UMTS/HSPA+/EVDO/TD-SCDMA/, TDD LTE/FDD LTE (Please refer to the Ordering Guide for frequencies)		
LAN protocol	ARP, Ethernet		
WAN protocol	Static IP, DHCP, PPPoE		
Network Protocol			
IP Application	IPv4, Ping, Trace, DHCP Server, DHCP Relay, DHCP Client, DNS relay, DDNS, Telnet, IP Passthrough		
IP Routing	Static routing, OSPF dynamic routing		
NAT	Supports network address translation		
Security			
Network Security	Stateful Packet Inspection (SPI), DoS attack defense; Multicast filter/Ping probe packet, Access Control List (ACL); Content URL filter, port mapping, virtual IP mapping, IP-MAC binding Supports PPTP, L2TP, GRE, IPSEC VPN (IKEV), IKEV2), OPENVPN,		
Data Security	Supports PAIR, CZIP, CRE, IPSEC VPN (IREV), IREVZ), OPENVPN, DMVPN, WireGuard, ZeroTier Supports CA digital certificate		
Reliability			
Hot Backup	VRRP hot backup		
Link Detection	Sends heartbeat packets to detect, auto redials when disconnected		
Dual SIM Failover	Supports dual SIM failover		
Embedded Watchdog	Device runs self-detection, auto recovers from malfunctions		
WLAN (Optional)			
Protocol	IEEE 802.11b/g/n		
Rate	Up to 300Mbps		
Security	Open system, shared key, WPA/WPA2 certification WEP/TKIP/AES encryption		
Transmission Distance	80 meters by line of sight (Actual transmission distance depends on environment of the site.)		
Intelligence			
Integrated DTU Functions	TCP, UDP transparent transmission mode, TCP Server mode Supports conversion of Modbus RTU to Modbus TCP bridge Supports DCUDP, DCTCP mode		
Network Managemer	it		
QoS Management	Bandwidth limit, IP speed limit		
Configuration	Telnet, web, ssh and console		
Update	Web, Device Manager		
Log	Local system log, remote log, and serial export of log. Power down saving of important logs.		
SMS Functions	Status query, restart		
Dial-on-demand	Dial-on-demand, data / SMS activation		
Network management	Supports InHand Device Manager, batch management Add the user experience plan to access The InHand Networks cloud platform to enjoy efficient and convenient services		
SNMP	SNMP v1/v2c/v3,supports SNMP TRAP		
Traffic Management	Supports data traffic threshold, traffic statistics and traffic alarm		
Alarm	System restart alarm, LAN port online/offline alarm, data traffic alarm, SIM card failure alarm ,etc.		



Ping, route tracking, network speed test

Maintenance Tools

Status Query



Model code: IR305- <wmnn>-<wlan na="">-<s na=""></s></wlan></wmnn>								
Model	<wmnn>: Cellular Type & Module</wmnn>	<wlan na="">: Wi-Fi</wlan>	<s na="">: Serial/IO</s>	<g na="">: GNSS</g>				
IR305-NRQ2- <wlan na="">-<s na=""></s></wlan>	(For China 5G) SG NR NSA: n41/n78/n79 SG NR SA: n1/n28*/n41/n77/n78/n79 LTE-FDD: B1/B3/B5/B8 LTE-TDD: B34/B38/B39/B40/B41 WCDMA: B1/B5/B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>					
IR305-LQ20- <wlan na="">-<s na=""></s></wlan>	(For China CAT4) FDD: B1/B3/B5/B8 TDD: B34/B38/B39/B40/B41 WADMA: B1/B5/B8 GSM: B3/B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S:1*RS232+1*RS485 <na>; 4*10</na>					
IR305-FQ58-< WLAN /NA>- <s na="">-<g na=""></g></s>	(For Europe & APAC, CAT 4) FDD: BI/B3/B7/B8/B20/B28A TDD: B38/B40/B41 WADMA: BI/ B8 GSM: B3/ B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>	G: GNSS <na>: no GNSS</na>				
IR305-FQ53-< WLAN /NA>- <s na=""></s>	(For Europe & APAC, CAT 1) FDD: B1/B3/B7/B8/B20/B28A WCDMA: B1/B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>					
IR305-FQ39- <wlan na="">-<s na="">-<g na=""></g></s></wlan>	(For North America, AT&T, VzW, T-Mobile, LTE CAT 6) FDD: B2/B4/B5/B7/B12/B13/B25/B26/B29/B30/B66 WCDMA: B2/B4/B5	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>	G: GNSS <na>: no GNSS</na>				
IR305-FF38- <wlan na="">-<s na="">-<g na=""></g></s></wlan>	(For North America, AT&T, VzW, LTE CAT4) FDD: 82/B4/B5/B12/B13/B17/B66/B71 WCDMA: B2/B4/B5	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>	G: GNSS <na>: no GNSS</na>				
IR305-FQ33- <wlan na="">-<s na=""></s></wlan>	(For North America, AT&T, VzW, LTE CATI) FDD: 82/ B4/ B5/ B12/B13/ B25/ B26 WCDMA: B2/B4/B5	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S:1*RS232+1*RS485 <na>: 4*IO</na>					
IR305-FQ78- <wlan na="">-<s na=""></s></wlan>	(For Australia, Latin America) FDD: B1/B2/B3/B4/B5/B7/B8/B28 TDD: B40 WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S:1*RS232+1*RS485 <na>: 4*IO</na>					
IR305-EN00- <wlan na="">-<s na=""></s></wlan>	NA	WLAN: Wi-Fi <na>: no Wi-Fi</na>	S: 1*RS232+1*RS485 <na>: 4*IO</na>					

Example: IR305-LQ20-WLAN: Five Ethernet ports IR305 series cellular router, support IPSec / PPTP / L2TP / OPEN VPN.

Note: Users are asked to join InHand User Experience Plan at first time login. If user agreed to join, the router will connect to InHand DeviceManager portal. If users want to disable it, please go to Services->User Experience Plan to change the setting.



InHand Remote Operation and Maintenance Solution

InConnect is a simple "plug & play" service that builds secure remote networks for your machines (IPCs, IP cameras, PLCs, HMIs, RTUs, controllers, etc.). Engineers can use InConnect to realize remote maintenance, program downloads, and log diagnostics. InConnect helps enterprises quickly connect to globally distributed business locations, empowering enterprises in their IT infrastructure and digital transformation initiatives.



InConnect Service

- Centralized management
- · Efficient zero touch deployment
- Simplified network configuration
- Multi-dimensional security



4G Industrial Router

- Multilink Backup & Dual SIM failover
- VPN networking
- Serial Port, I/O
- EMC Level 2
- IP30, -20~70°C, DC 9~36V



Singel 3 | B-2550 Kontich | Belgium | Tel. +32 (0)3 458 30 33 | info@alcom.be | www.alcom.be | www.alcom.be | Rivium 1e straat 52 | 2909 LE Capelle aan den Ijssel | The Netherlands | Tel. +31 (0)10 288 25 00 | info@alcom.nl | www.alcom.nl

About Us

InHand Networks is a leading IoT solutions provider founded in 2001, dedicated to driving digital transformation across industries and empowering customers to unlock their full potential and achieve accelerated growth.

We specialize in delivering industrial-grade connectivity solutions for diverse sectors, such as enterprise networks, industrial and building IoT, digital energy, smart commerce, and mobility. Our comprehensive product portfolio and services cater to various applications worldwide, including smart manufacturing, smart grid, intelligent transportation, smart retail, etc. With a global footprint spanning over 60 countries, we serve customers in China, the United States, France, Germany, the United Kingdom, Italy, and beyond.



43671 Trade Center Place, Suite 100, Dulles, VA 20166, USA T: +1 (703) 348-2988 E: info@inhand.com www.inhand.com