

FEATURES

- ▶ Ultra Compact Size 1.52x1.00x0.66"
- ▶ Fully Encapsulated Plastic Case for PCB and Chassis Mounting Version
- ▶ Universal Input 85-264VAC, 90-370VDC, 47-440Hz
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ No Min. Load Requirement & Low no-load power consumption
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ EMI Emission EN55014-1/55032 Class B Approved
- ▶ EMS Immunity EN61000-4-2,3,4,5,6,8,11 Approved
- ▶ Safety Approval to UL/cUL/IEC/EN 62368-1, IEC/EN 60335-1 & CE Marking

NEW**PRODUCT OVERVIEW**

The MINMAX AMF-07 series is a new generation of fully encapsulated AC-DC power supply modules with ultra-compact size for higher power density and space saving.

The product features universal AC input 85-264VAC and wider DC input 90-370VDC, regulated output voltages 5,12,15,24,48VDC ; I/O Isolation 3000VAC with Reinforced Insulation ; EMI emission EN55014-1/32 Class B and EMS immunity EN 61000-4 standards approved ; no min. load requirement and low no-load power consumption ; abnormal protection mechanism with output overload, short circuit and overvoltage protections.

The AMF-07 series equips with PCB and Chassis Mounting Version for flexible installation and comply with UL/IEC/EN 62368-1 & IEC/EN 60335-1 for safety usage. It provides a cost effective solution especially for space critical applications in industrial and household electronic equipment.

Model Selection Guide

Model Number	Output Voltage	Output Power	Output Current	Input Current	Max. capacitive Load	Efficiency (typ.)
				115VAC, 60Hz		
	VDC	W	Max. mA	@Max. Load mA(typ.)	μF	@Max. Load %
AMF-07S05	5	7	1400	146	1500	80
AMF-07S12	12	7.02	585	141	270	84
AMF-07S15	15	7.01	467	139	180	84
AMF-07S24	24	7.01	292	138	120	85
AMF-07S48	48	7.01	146	138	33	84

Input Specifications

Parameter	Conditions		Min.	Typ.	Max.	Unit
AC Input Voltage Range	ALL Models		85	---	264	VAC
AC Input Frequency Range			47	---	440	Hz
DC Input Voltage Range			90	---	370	VDC
No-Load Power Consumption	115VAC		---	---	150	mW
	230VAC		---	---	300	mW
Inrush Current	115VAC	Cold Start at 25°C	---	---	15	A
	230VAC		---	---	30	A

Output Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	±1.0	±2.0	%
Line Regulation	Vin=Min. to Max. @Full Load	---	---	±0.5	%
Load Regulation	Io=0% to 100%	---	---	±1.0	%
Ripple & Noise	0-20 MHz Bandwidth	5VDC Output Model	---	1.8	%V _{PP} of Vo
		Other Output Models	---	1.0	%V _{PP} of Vo
Minimum Load	No minimum Load Requirement				
Over Voltage Protection	Zener diode clamp	---	125	---	% of Vo
Temperature Coefficient		---	±0.01	±0.02	%/°C
Overshoot		---	---	5	% Vout
Over Load Protection	auto-recovery	110	---	---	%Inom.
	(long term overload condition may cause damage)				
Short Circuit Protection	Hiccup mode, Automatic Recovery				

General Specifications


Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Input to Output, 60 Seconds	3000	---	---	VAC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
Switching Frequency		---	125	---	kHz
Start-up Time		---	---	2	s
Hold-up Time	115VAC, 60Hz	10	---	---	ms
	230VAC, 50Hz	20	---	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	499,890	---	---	Hours
Safety Approvals	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1(CB-report) IEC/EN 60335-1, 61558-1, 61558-2-16 recognition(CB-report)				

EMC Specifications

Parameter	Standards & Level			Performance
General	Compliance with EN 61204-3 Switch mode power supplies			
EMI	Conduction	EN55014-1, EN 55032	Without external components	Class B
	Radiation			
EMS	EN 55014-2, EN 55024, EN 55035			
	ESD	Direct discharge	Indirect discharge HCP & VCP	
		EN61000-4-2 air ± 8kV, Contact ± 6kV	Contact ± 6kV	
	Radiated immunity	EN 61000-4-3 10V/m		
	Fast transient	EN 61000-4-4 ±2kV		
	Surge	EN 61000-4-5 ±1kV		
	Conducted immunity	EN 61000-4-6 10Vrms		
	PFMF	EN 61000-4-8 30A/m		
	Dips	EN 61000-4-11 30% 10ms		
Interruptions	EN 61000-4-11 >95% 5000ms			


Environmental Specifications

Parameter	Min.	Typ.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	---	+80	°C
Storage Temperature Range	-40	---	+85	°C
Humidity (non condensing)	---	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	---	260	°C

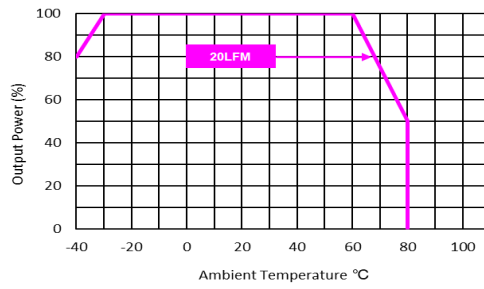Power Derating Curve**Notes**

- 1 All Specifications typical at $T_a=+25^{\circ}\text{C}$, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- 2 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 3 Other input and output voltage may be available, please contact MINMAX.
- 4 The continuous operation on DC input voltage of 80VDC to 370VDC is available after start-up at 90VDC.
- 5 Specifications are subject to change without notice

Package Specifications PCB Mounting

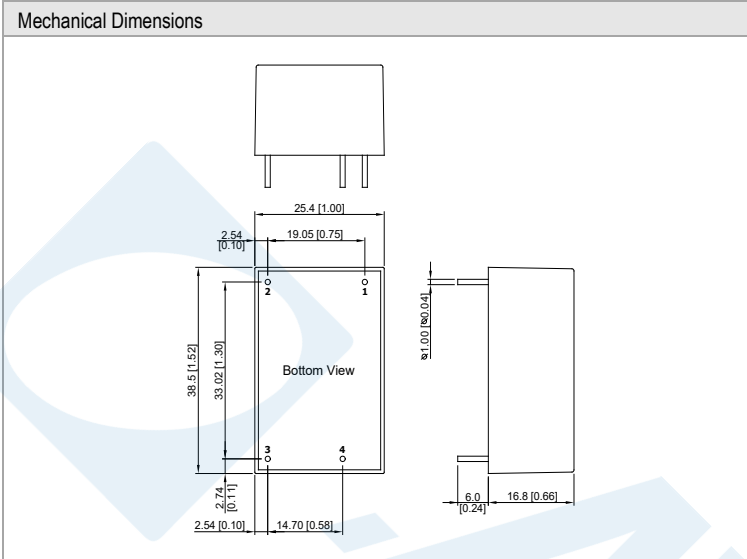


Pin Connections	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vout
4	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 0.5 (± 0.02)
- ▶ Pin pitch tolerance: ± 0.25 (± 0.01)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04 ± 0.004)

Physical Characteristics

Case Size	: 38.5x25.4x16.8mm (1.52x1.00x0.66 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Tin Plate Over Nickel Subplate
Weight	: 29g

Package Specifications Chassis Mounting

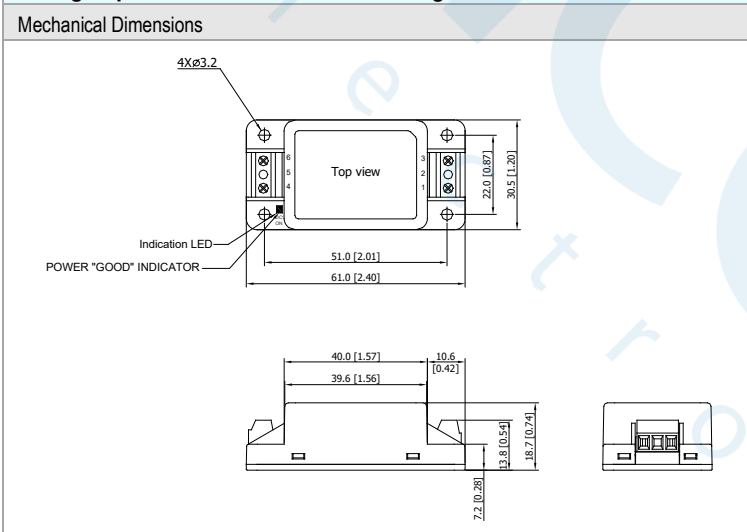

Pin Connections	
Pin	Function
1	AC(L)
2	No Pin
3	AC(N)
4	-Vout
5	No Pin
6	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 0.5 (± 0.02)

Physical Characteristics

Case Size	: 61.0x30.5x18.7mm (2.40x1.20x0.74 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 34g

Order Code Table	
PCB Mounting	Chassis Mounting
AMF-07S05	AMF-07S05C
AMF-07S12	AMF-07S12C
AMF-07S15	AMF-07S15C
AMF-07S24	AMF-07S24C
AMF-07S48	AMF-07S48C